

ESDFBP05VL

ESD Protection Diode With Ultra-Low Capacitance

Description

The ESDFBP05V is designed to protect voltage sensitive components that require ultra-low capacitance from ESD and transient voltage events. Excellent clamping capability, low capacitance, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium.

Because of its low capacitance, it is suited for use in high frequency designs such as USB high speed and antenna line applications.

Features


- Ultra Low Capacitance 0.5 pF
- Low Clamping Voltage
- Small Body Outline Dimensions:
- Stand-off Voltage: 5 V
- Low Leakage
- Response Time is Typically < 1.0 ns
- IEC61000-4-2 Level 4 ESD Protection
- This is a Pb-Free Device
- RoHS Compliant Package

Complies with the following standards

- IEC61000-4-2 Level 4
- 15 kV (air discharge)
- 8 kV(contact discharge)
- MIL STD 883E - Method 3015-7 Class 3
- 25 kV HBM (Human Body Model)

Packing & Order Information

3,000/Reel



RoHS
COMPLIANT


WBFBP-02L



TOP VIEW




SIDE VIEW

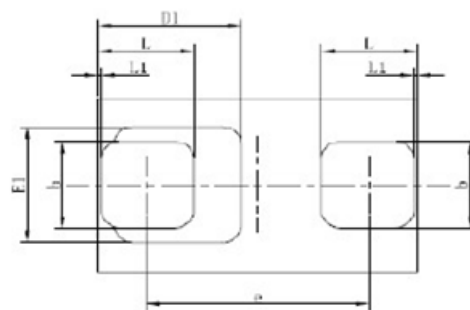

BOTTOM VIEW

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.045	0.550	0.018	0.022
A1	0.010	0.070	0.000	0.003
D	0.095	1.050	0.037	0.041
E	0.550	0.650	0.022	0.260
D1	0.45REF.		0.018REF.	
E1	0.400REF.		0.016REF.	
b	0.275	0.325	0.011	0.013
e	0.675	0.725	0.027	0.029
L	0.275	0.325	0.011	0.013
L1	0.010REF.		0.000REF.	

Graphic symbol



ESDFBP05VL

ESD Protection Diode With Ultra-Low Capacitance

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Maximum ratings (limiting value)

Symbol	Parameter	Value	Unit
	IEC 61000-4-2 (ESD) Contact	8	kV
TJ	ESD Voltage Per Human Body Model 25 KV	25	kV
	Per Machine Model	400	V
PD	Peak Pulse Power ($t_p = 8/20 \mu s$) @ $T_A = 25^\circ C$	100	W
TJ, TSTG	Junction and Storage Temperature Range	-55 to +150	$^\circ C$
TL	Lead Solder Temperature – Maximum (10 Second Duration)	260	$^\circ C$

Electrical Characteristics ($T_A = 25^\circ C$ unless otherwise noted, $V_F = 0.9V$ Max. @ $I_F = 10mA$ for all types)

Part Numbers	V_{BR} min	I_T	V_{RWM}	V_F Max	I_F	I_R	C_j TYP
	V	mA	V	V	mA	μA	PF
ESDFBP05VL	6	1	3.3	1	10	1	0.5

1. Capacitance is measured at $f = 1MHz$, $V_R = 0V$, $T_A = 25^\circ C$.
2. V_{BR} is measured with a pulse test current I_T at an ambient temperature of $25^\circ C$.

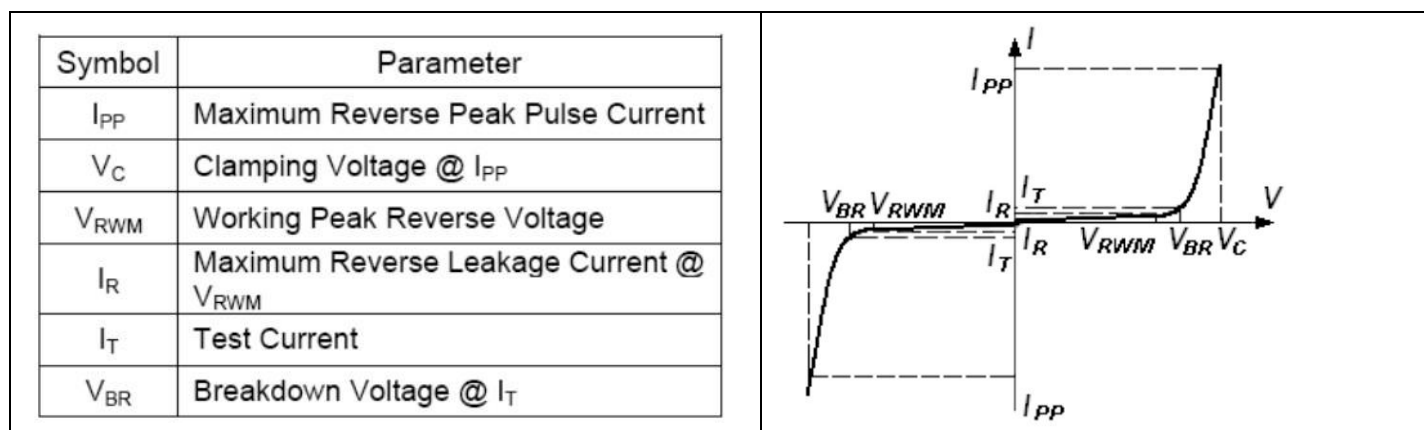

ESDFBP05VL

ESD Protection Diode With Ultra-Low Capacitance

Typical Device Characteristics

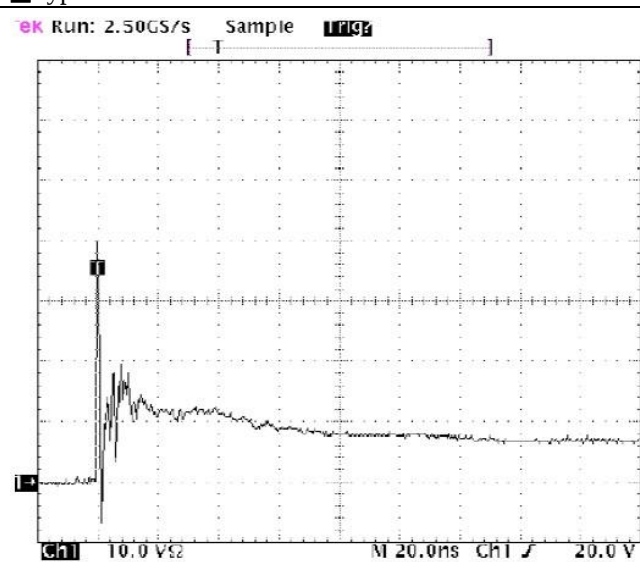


FIG.1-POSITIVE 8KV CONTACT PER IEC6100-4-2

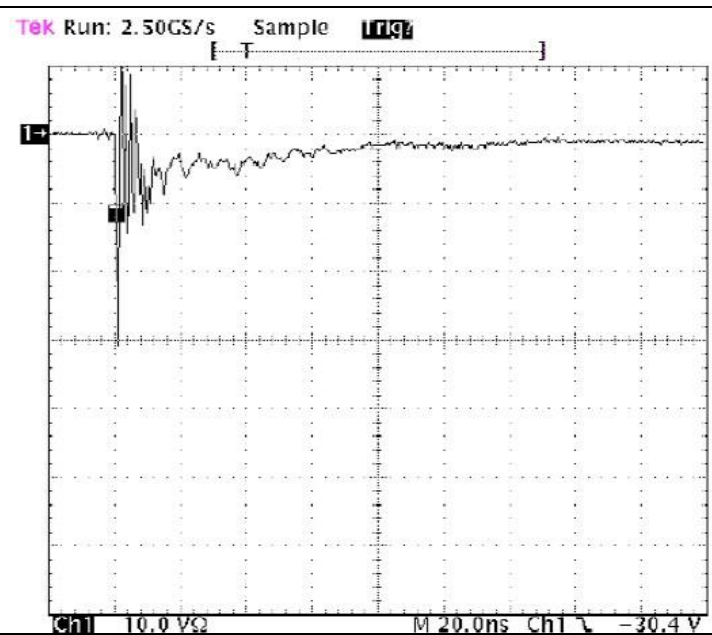


FIG.2-NEGATIVE 8KV CONTACT PER IEC6100-4-2-SESD5L5V 61000-4-2

IEC 61000-4-2 Spec.

Level	Test Voltage (kV)	First Peak Current (A)	Current at 30 ns (A)	Current at 60 ns (A)
1	2	7.5	4	2
2	4	15	8	4
3	6	22.5	12	6
4	8	30	16	8

IEC61000-4-2 Waveform

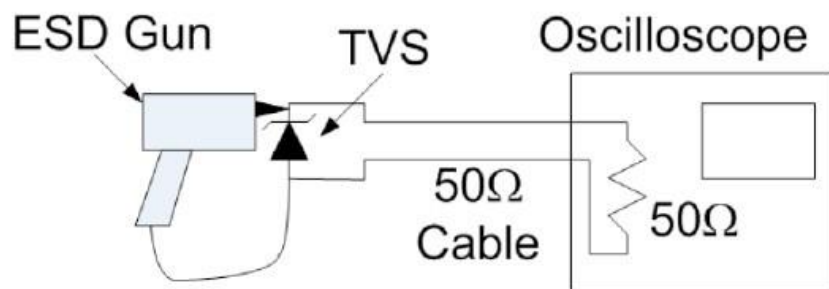
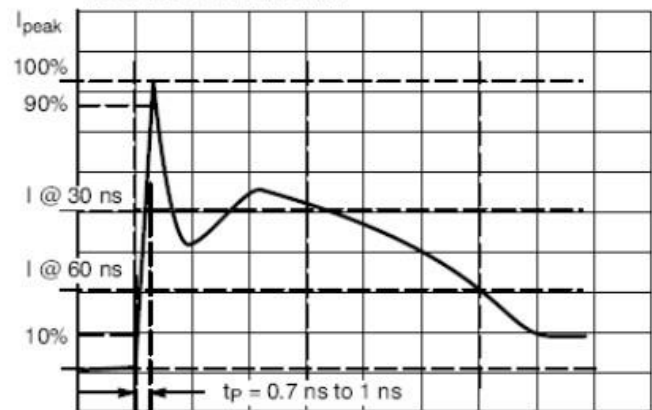


FIG.4-DIAGRAM OF ESD TEST SETUP

ESDFBP05VL

ESD Protection Diode With Ultra-Low Capacitance

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.