

### HIGH VOLTAGE DIODE

ESJA19 is high reliability resin molded type high voltage diode in small size package which is sealed (a multilayed mesa type silicon chip) by epoxy resin.

### ■ Features

- High reliability design.
- Ultra small pakage.
- High temperature resistivity

### ■ Applications

- Distributor-less Ignition system of Coil Distributed Type for Automobile

### ■ Maximum Ratings and Characteristics


- Absolute Maximum Ratings

Items	Symbols	Condition	ESJA28		Units
			-02S	-03	
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	f=60Hz	2.2	2.7	kV
Non-Repetitive Peak Reverse Voltage	V <sub>RSM</sub>	Ignition Pulse f=150Hz,1minute	2.5	3.0	kV
Average Output Current	I <sub>O</sub>	60 Hz Sine wave	10		mA
Surge Current	I <sub>FSM</sub>	60 Hz Sine-half wave peak value	1.0		A
Operating Junction Temperature	T <sub>j</sub>		150		°C
Storage Temperature	T <sub>stg</sub>		-40 to +150		°C

- Electrical Characteristics (Ta=25°C Unless otherwise specified )

Items	Symbols	Conditions	ESJA28		Units
			-02S	-03	
Maximum Forward Voltage Drop	V <sub>F</sub>	I <sub>F</sub> =10mA	7	8.4	V
Maximum Reverse Current	I <sub>R1</sub>	V <sub>R</sub> =2.2kV	5		µA
Maximum Reverse Current	I <sub>R2</sub>	V <sub>R</sub> =2.5kV	10		µA
Minimum Avalanche Breakdown Voltage	V <sub>Z</sub>	I <sub>Z</sub> =100µA	2.7		kV

### ■ Outline Drawings

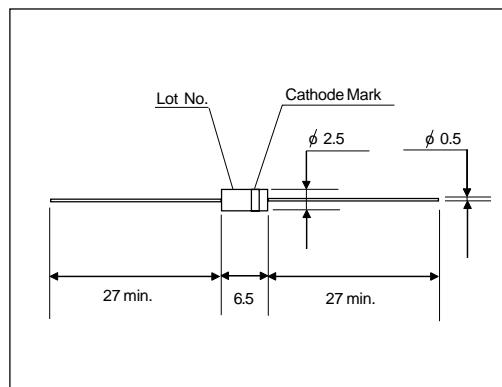

### ■ Cathode Mark

Type	Mark
ESJA28-02S	
ESJA28-03	▲

# ESJA28(2.2kV,2.7kv/5mA)

## ■ Characteristics

