

FEATURES

- Glass passivation chip junction.
- Fast switching for high efficiency
- High reliability
- Low forward voltage ,high current capacity Mechanical Data
- Case:TO-220AB molded plastic, Lead-free package
- Epoxy: UL 94V-0 rate flame retardant
- Terminals: Pure tin plate, lead free, solderable per MIL-STD-202, method 208 guaranteed
- Polarity: as marked

Product Description

Designer for used the switching power supply. Inverter, free wheeling, and polarity protection application.

产品特性: F16C20C、F16C20A为高效超快快恢复整流二极管: 16A, 200V

代替型号: MUR1620系列; ER1600系列...

应用领域: 开关电源、逆变器、免费续流和极性保护应用

应用范围: PC电源、开关电源、电动车充、电动工具、汽车功放等产品; 小功率电焊机广泛应用...

Characteristics	Symbol	Typical data	Final Spec	Units
Peak Repetitive Reverse Voltage	V_{RRM}	250~350	230	V
Working Peak Reverse Voltage	V_{RWM}			
DC Blocking Voltage	V_R			
RMS reverse Voltage	$V_{R(RMS)}$		150	
Maximum instantaneous forward voltage ($I_F=8A$, $T_C=25^{\circ}C$)	V_F	0.95~1.05	1.1	
Average Rectifier Forward Current Per Leg $T_C=125^{\circ}C$ Total Device	$I_{F(AV)}$		8 16	A
Peak Repetitivity Forward Current (Rate V_r , Square Wave, 20kHz)	I_{FM}		16	
Non-Repetitivity Peak Surge Current Maximum Instantaneous Forward	I_{FSM}		150	
Maximum Instanteous Reverse Current (Rated DC Voltage, $T_C=25^{\circ}C$) (Rated DC Voltage, $T_C=125^{\circ}C$)	I_R	≤ 1	5	μA
			100	
Reverse Recovery Time ($I_F=0.5A$, $I_R=1$, $I_{rr}=0.25A$)	T_{rr}	60~80	100	nS
Typical Juntion Capacitance (Reverse Voltage of 4 volts & $f=1MHz$)	C_p		120	pF
Operation and Storage Temp Range	T_J & T_{stg}		-65~+150	$^{\circ}C$

RATING CHARACTERISTIC CURVES (F16C05PT ~ F16C60PT)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC


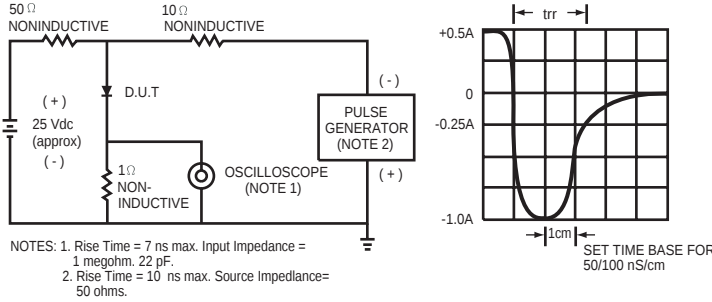


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

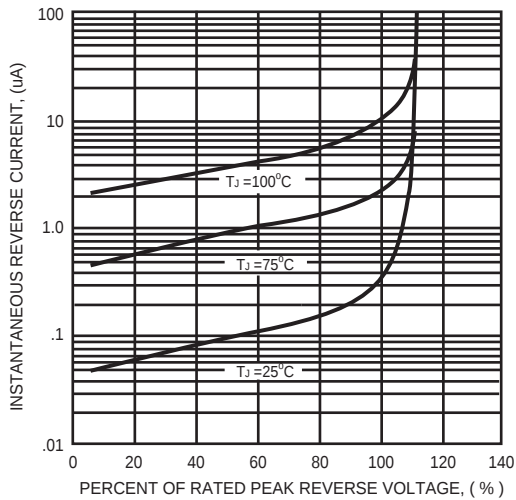


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

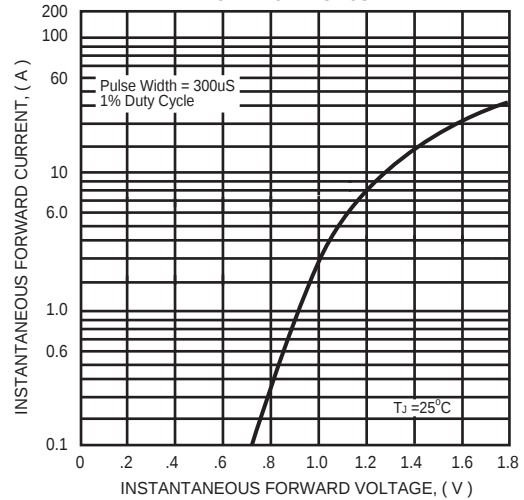


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT



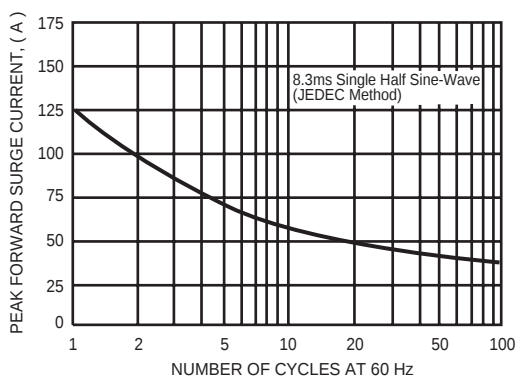


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

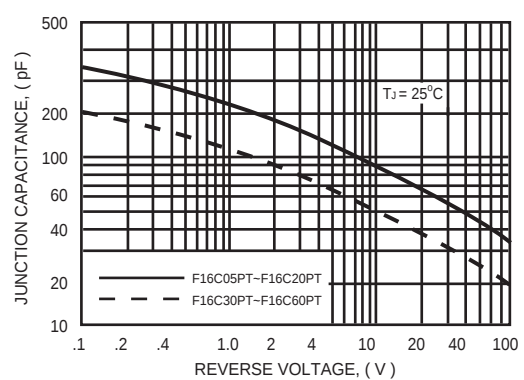

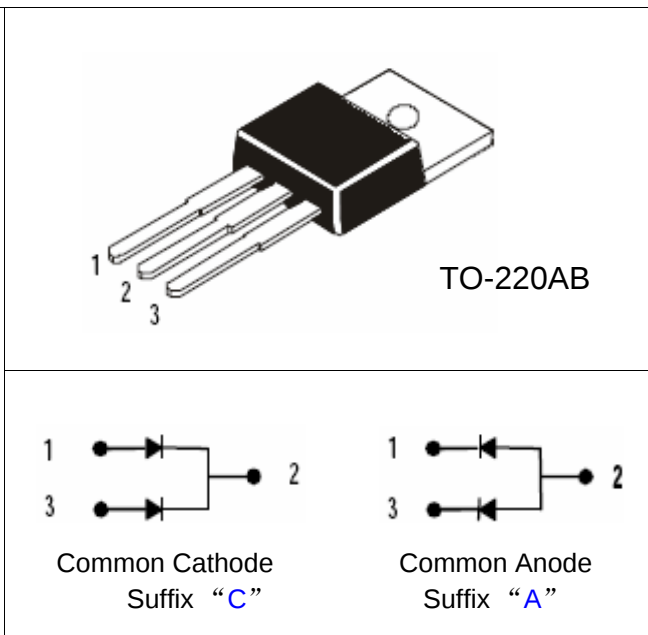


TO-220AB
Lead-free package
无铅环保封装

极性说明:
F16C20C: 共阴
F16C20A: 共阳

包装规格:
管装、盒装
每管50只
每盒1000只
每箱5000只

MECHANICAL DATA Package: TO-220AB
Package Dimensions Dimensions in millimeters

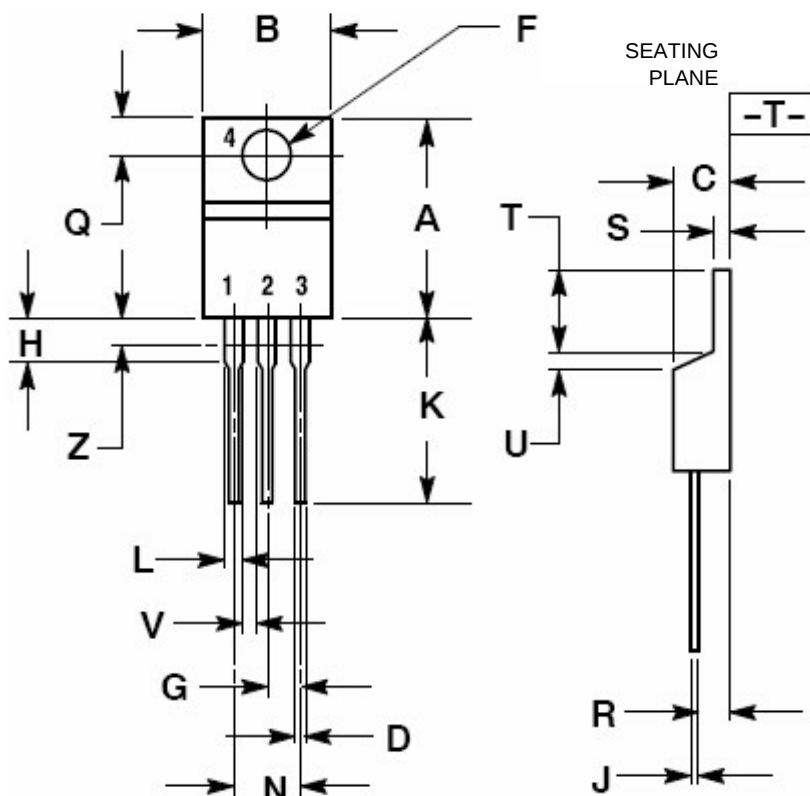

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.570	0.620	14.48	15.75
B	0.380	0.405	9.660	10.28
C	0.160	0.190	4.070	4.820
D	0.025	0.035	0.640	0.880
F	0.142	0.161	3.610	4.090
G	0.095	0.105	2.420	2.660
H	0.110	0.155	2.800	3.930
J	0.014	0.025	0.360	0.640
K	0.500	0.562	12.70	14.27
L	0.045	0.060	1.150	1.520
N	0.190	0.210	4.830	5.330
Q	0.100	0.120	2.540	3.040
R	0.080	0.110	2.040	2.790
S	0.045	0.055	1.150	1.390
T	0.235	0.255	5.970	6.470
U	0.000	0.050	0.000	1.270
V	0.045	---	1.150	---
Z	---	0.080	---	2.040



经中华人民共和国工商行政管理总局商标局批准

HAOHAI、HHE 图案、字母、均为我公司正式注册商标，仿冒、盗用均属侵权，违法必究！

深圳市浩海电子有限公司**SHENZHEN HAOHAI ELECTRONICS CO., LTD.**2 floor(whole floor), BAOXIN Building, 0 Lane on the 8th, Yufeng Garden.
82 District, BAOAN District, Shenzhen City, Guangdong Province, China.

中國 廣東省 深圳市 寶安區 82區 裕豐花園 零巷8號 寶馨樓 二楼 (全层)

公司电话 TEL: +86-755-29955080、29955081、29955082、29955083
总机八线 29955090、29955091、29955092、29955093

FAX: +86-755-27801767

E-mail: kkg@kkg.com.cn

产品主页: <http://www.szhhe.com><http://www.kkg.com.cn>