

FERP20D

Ultra fast Plastic Power Rectifiers

VOLTAGE: 200V

CURRENT:20.0A




FEATURE

Plastic package has Underwriters Laboratories Flammability Classification 94V-0
Ideally suited for use in very high frequency switching power supplies, inverters and as free wheeling diodes
Ultra fast recovery time for high efficiency
Excellent high temperature switching
Glass passivated junction
High voltage and high reliability
High speed switching
Low forward voltage

MECHANICAL DATA

Case: JEDEC ITO-220 molded plastic body over passivated chip
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any

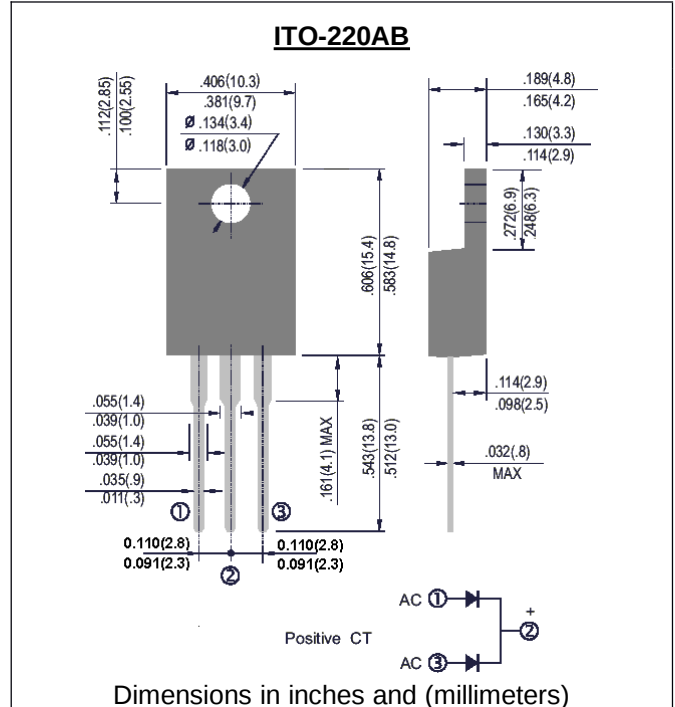

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	FERP20D	units
Maximum Recurrent Peak Reverse Voltage	V _{rrm}	200	V
Maximum RMS Voltage	V _{rms}	140	V
Maximum DC blocking Voltage	V _{dc}	200	V
Maximum Average Forward Rectified at T _c =100°C	I _{f(av)}	20.0	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I _{fsm}	180	A
Maximum Forward Voltage at Forward Current 10A and 25°C	V _f	1.0	V
Maximum Reverse Recovery Time (Note 1)	T _{rr}	50	nS
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =125°C	I _r	10 100	μA
Typical thermal resistance junction to case	R _{th(jc)}	4.5	°C/W
Storage and Operating Temperature Range	T _{stg} , T _j	-55 to +150	°C

Note:

- Reverse Recovery Condition I_f =0.5A, I_r =1.0A, I_{rr} =0.25A

RATINGS AND CHARACTERISTIC CURVES FERP20D

Fig. 1 – Forward Current Derating Curve

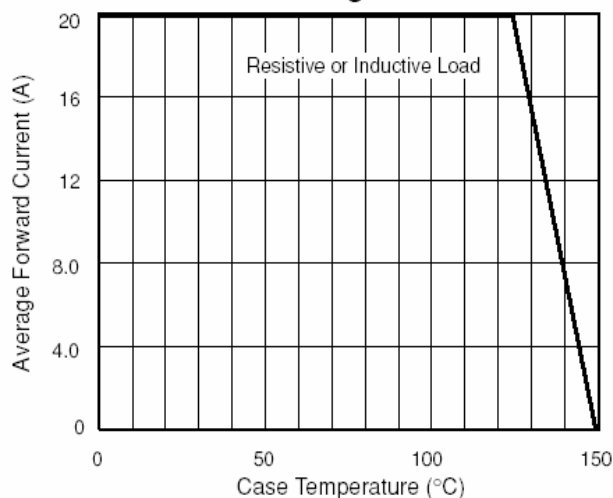


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

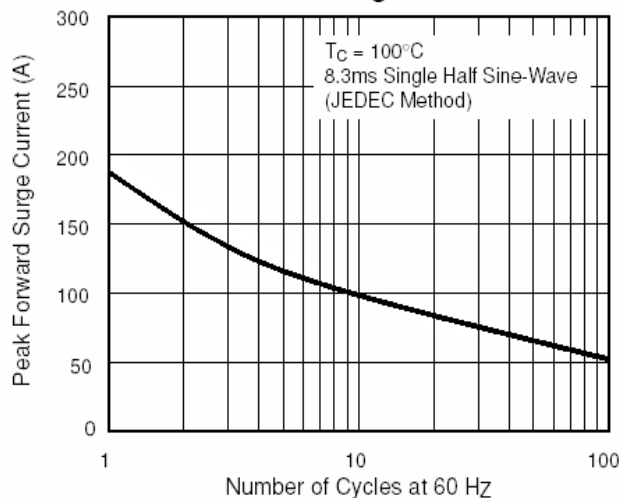


Fig. 3 – Typical Instantaneous Forward Characteristics Per Leg

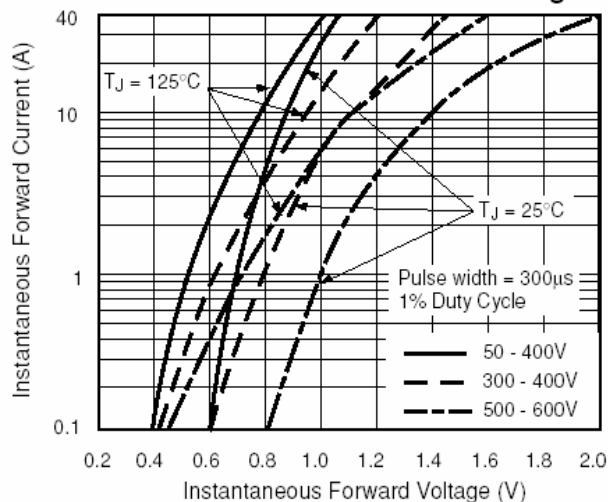


Fig. 4 – Typical Reverse Characteristics Per Leg

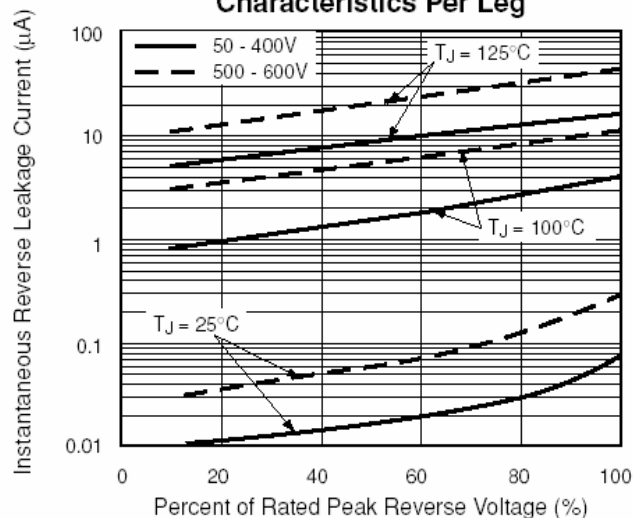


Fig. 5 – Typical Junction Capacitance Per Leg

