

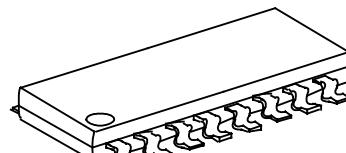
**DUAL PWM CONTROL IC
WITH SHORT CIRCUIT RESTART FUNCTION****GENERAL DESCRIPTION**

The **FP5453**, a 1-chip composed of totem-pole output stage pulse-width-modulation control circuits with two error amplifiers and dead-time comparators (DTC), the **FP5453** contains a **2.5V** precision voltage reference regulator, under-voltage lockout circuit (UVLO), programmable auto-restart timer for short circuit protection (SCSAR), applied to offer space and low cost in many applications such as the DC/DC converter.

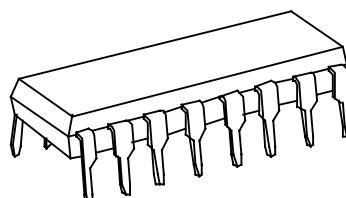
Using few external components, **FP5453**, a high performance integrated IC, is designed for a control circuit. The circuit diagram of the typical application example is as below.

FEATURES

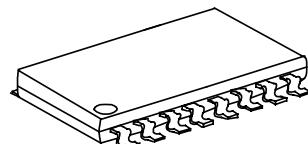
- Fixed Reference Voltage: 2.5V
- Reference Voltage Precision: 2%
- Totem-pole output stage
- Low quiescent supply current under 4mA
- Wide operating voltage range: 3.6~25V
- Variable dead-time control (DTC)
- UVLO protection function
- Short circuit shutdown/auto re-start function (SCSAR)
- Oscillator Frequency: Max. 1.2MHz
- Package: SOP16/PDIP16/SSOP16/SOP16(EP)



SOP16



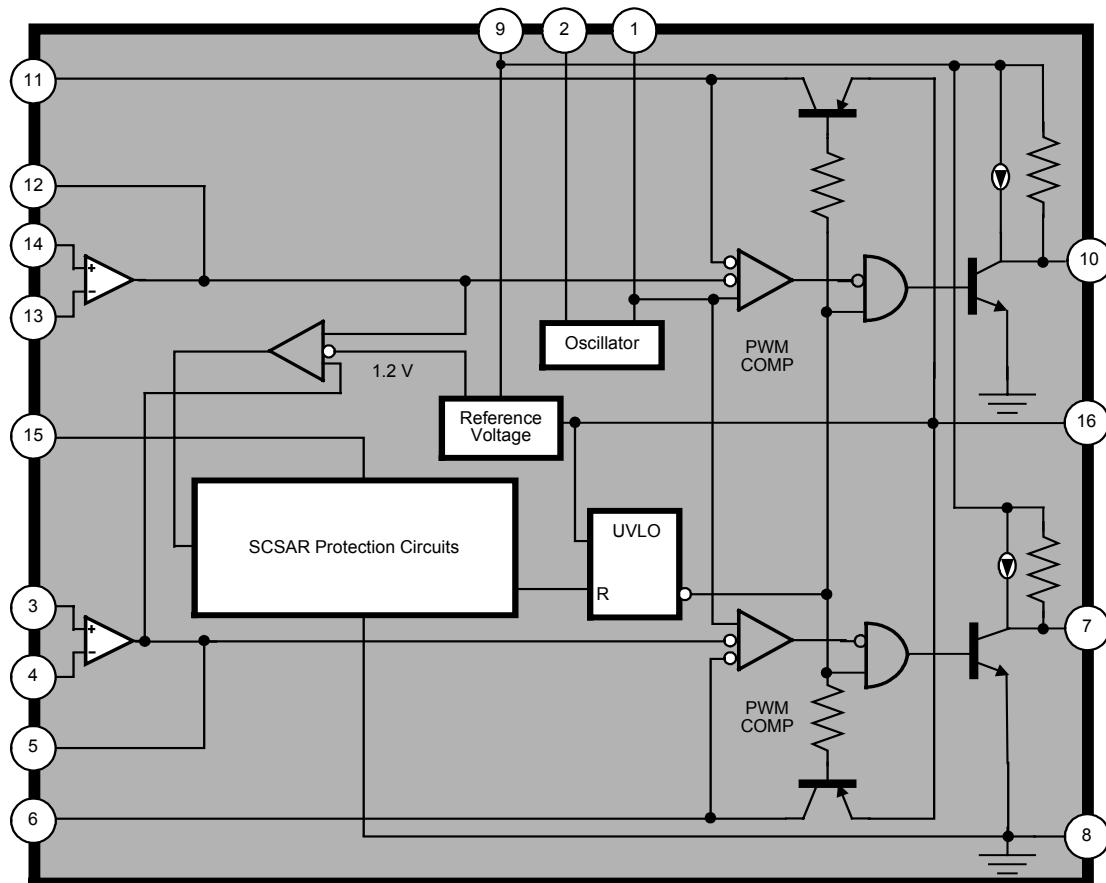
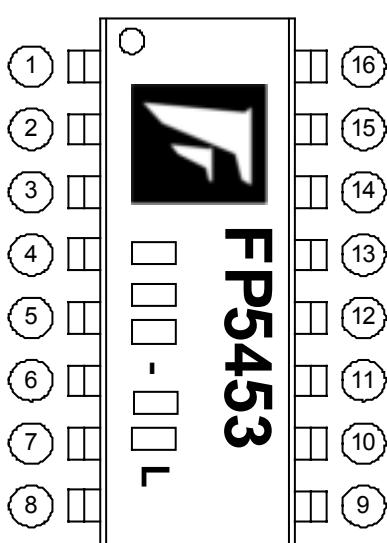
PDIP 16



SSOP 16

TYPICAL APPLICATION

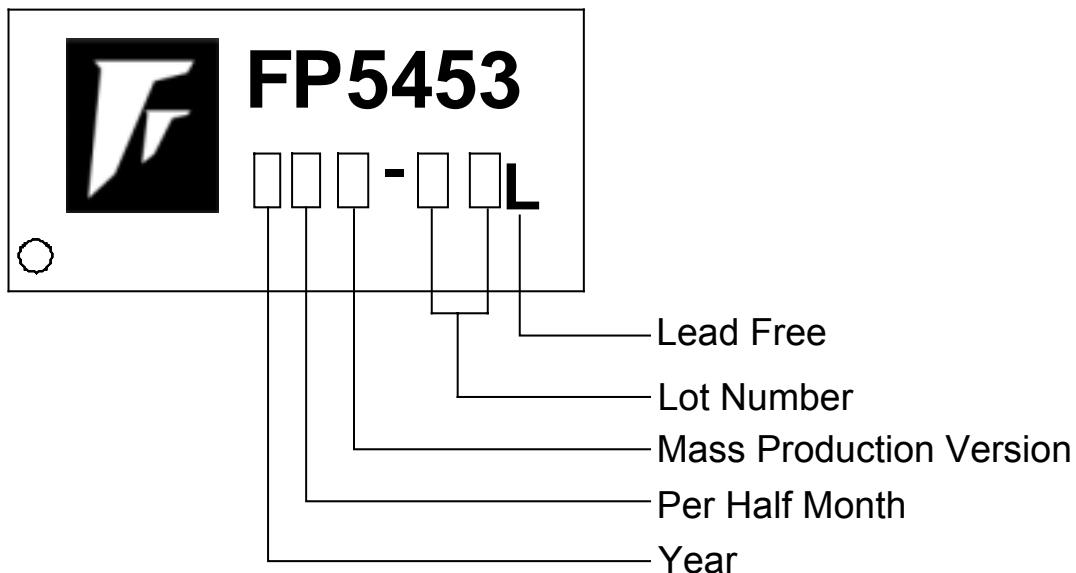
- HUB/Router
- Set Top Box
- HDD Server
- CATV

FUNCTIONAL BLOCK DIAGRAM

MARK VIEW

PIN DESCRIPTION

NAME	NO.	STATUS	DESCRIPTION
CT	1	I	Connect a Capacitor for Oscillator
RT	2	I	Connect a Resistor for Oscillator
EA1+	3	I	Error Amplifier 1 Non-inverting Input
EA1-	4	I	Error Amplifier 1 Inverting Input
FB1	5	O	Error Amplifier 1 Feedback Output
DTC1	6	I	Output 1 Dead-Time Comparator
OUT1	7	O	Totem-pole Output 1
GND	8	P	IC Ground
VCC	9	P	IC Power Supply
OUT2	10	O	Totem-pole Output 2
DTC2	11	I	Output 2 Dead-Time Comparator
FB2	12	O	Error Amplifier 2 Feedback Output
EA2-	13	I	Error Amplifier 2 Inverting Input
EA2+	14	I	Error Amplifier 2 Non-inverting Input
SCSAR	15	I	Short Circuit Protection Input
VREF	16	O	2.5V Reference Voltage Output

ORDER INFORMATION

Part Number	Operating Temperature	Package	Description
FP5453P-LF	-20°C ~ +85°C	PDIP16	Tube
FP5453D-LF	-20°C ~ +85°C	SOP16	Tube
FP5453DR-LF	-20°C ~ +85°C	SOP16	Tape & Reel
FP5453R-LF	-20°C ~ +85°C	SSOP16	Tube
FP5453RR-LF	-20°C ~ +85°C	SSOP16	Tape & Reel
FP5453X-LF	-20°C ~ +85°C	SOP16(EP)	Tube
FP5453XR-LF	-20°C ~ +85°C	SOP16(EP)	Tape & Reel

IC DATE CODE DISTINGUISH

FOR EXAMPLE:

January	A (Front Half Month), B (Last Half Month)
February	C, D
March	E, F -----And so on

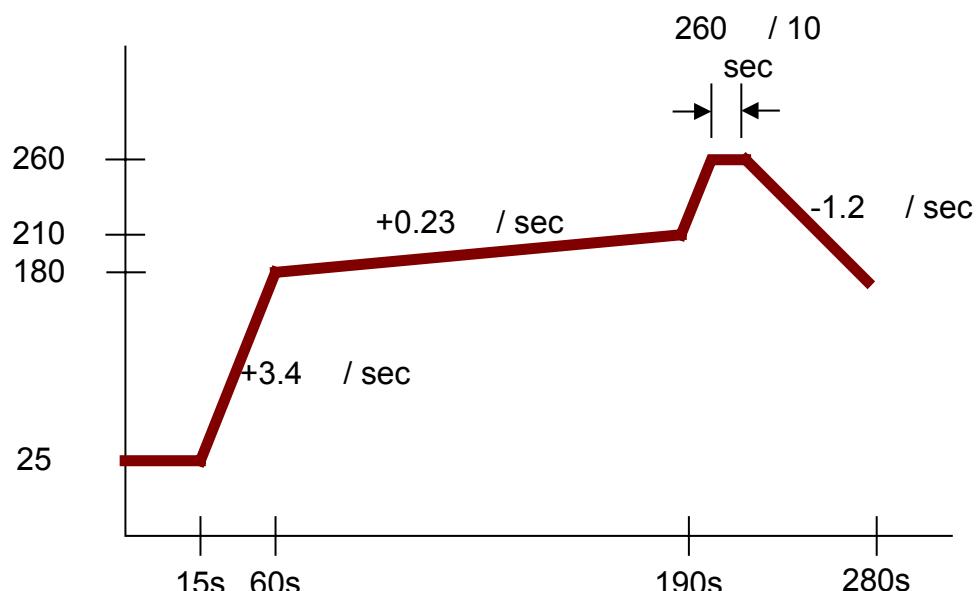
Lot Number is the last two numbers

For Example:

A3311C62
 ↓
 Lot Number

ABSOLUTE MAXIMUM RATINGS

Supply Voltage (Vcc) -----	+25V
Differential Input Voltage (V_{id}) -----	+3V
Output Current (I_o) -----	+150mA
Maximum Junction Temperature (T_j) -----	+150°C
Thermal Resistance Junction to Ambient	
PDIP16 package -----	125°C /W
SOP16 package -----	150°C /W
SSOP16 package -----	220°C /W
Power Dissipation	
DIP16 package	
Ta=25 -----	1000mW
Ta=70 -----	640mW
SOP16 package	
Ta=25 -----	830mW
Ta=70 -----	530mW
SSOP16 package	
Ta=25 -----	570mW
Ta=70 -----	360mW
Operating Temperature Range -----	-20°C 85°C
Storage Temperature Range -----	-65°C 150°C
Lead Temperature (soldering, 10 sec) -----	+260°C


IR Re-flow Soldering Curve

DC ELECTRICAL CHARACTERISTICS

Electrical characteristics over recommended operating free-air temperature range, $V_{CC}=6V$, $f=200kHz$ (unless otherwise noted)

Reference section

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output voltage (pin 16)	V_{REF}	$I_O=1mA$	2.45	2.5	2.55	V
Output voltage change with Temperature		$T_A=-20$ to 25		-0.1	± 1	%
		$T_A=25$ to 85		-0.2	± 1	
Input voltage regulation	V_{REF} / V_{REF}	$V_{CC}=3.6V$ 25V		2	12.5	mV
Output voltage regulation	V_{REF} / V_{REF}	$I_O = 0.1mA$ to 1 mA		3	8	mV
Short-circuit output current	I_{SHORT}	$V_O=0$	3	10	30	mA

Under voltage lockout section

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Upper threshold voltage(V_{CC})	V_{UPPER}			3.2		V
Lower threshold voltage(V_{CC})	V_{LOW}			3.0		V
Hysteresis (V_{CC})	V_{HYS}	$I_{O(REF)} = 0.1 mA$, $T_A=25$	100	200		mV

Short-circuit protection control section

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
SCP re-start voltage	V_{RS}	V_{FB1} or $V_{FB2} < 1.5V$		0.5		V
SCP threshold voltage	V_{TH}	V_{FB1} or $V_{FB2} < 1.5V$		1.0		V
SCP re-start charge current	I_{RSC}	V_{FB1} or $V_{FB2} < 1.5V$	20			μA
SCP re-start / hold time	T_{RS} / T_{HOLD}	V_{FB1} or $V_{FB2} < 1.5V$		1/50		-
SCP comparator 1 threshold voltage	$V_{COMP(TH)}$			1.2		V

Oscillator section

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Frequency	f	$C_T=330pF, R_T=10K$		200		KHz
Frequency change with voltage	f / V	$V_{CC}=3.6V$ to 25V		0.2		%
Frequency change with Temperature	f / T	$T_A=-20$ to 25		-0.4	± 2	%
		$T_A=25$ to 85		-0.2	± 2	

DC ELECTRICAL CHARACTERISTICS (Cont.)
Dead-time control section

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input bias current (DTC)	I_{BIAS}				1	μA
Input threshold voltage	V_{TH}	Zero duty cycle		2.0	2.20	V
		Maximum duty cycle	1.2	1.4		

Error -amplifier section

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input offset voltage	V_{IO}	$V_{FB}=1.25V$			± 6	mV
Input offset current	I_{IO}	$V_{FB}=1.25V$			± 100	nA
Input bias current	I_{BIAS}	$V_{FB}=1.25V$		160	500	nA
Open-loop voltage amplification	A_{VO}		70	80		dB
Unity-gain bandwidth	BW				1.5	MHz
Positive output voltage swing	V_{POS}		$V_{ref}-0.3$			V
Negative output voltage swing	V_{NEG}				1	V
Output (sink) current (FEEDBACK)	I_{SINK}	$V_{ID} = -0.1V, V_O = 1.25V$	2	3		mA
Output (source) current (FEEDBACK)	I_{SOURCE}	$V_{ID} = 0.1V, V_O = 1.25V$	-100	-140		μA

Output section

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Vout Low Voltage	V_{OL}	$I_{SINK} = 20mA$		0.18	0.2	V
		$I_{SINK} = 130mA$ $V_{cc} = 15V$		1.7	2.0	
Vout High Voltage	V_{OH}	$I_{SOURCE} = 20mA$	4.0	4.5		V
		$I_{SOURCE} = 130mA$ $V_{cc} = 15V$	12.8	13.4		
Rise Time	t_R	$T_J = 25^\circ C, C_L = 1nF$		50	100	nS
Fall Time	t_F	$T_J = 25^\circ C, C_L = 1nF$		50	100	nS

PWM comparator section

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input threshold voltage at $f=10kHz$ (FEEDBACK)	V_{TH}	Zero duty cycle		2.0	2.20	V
		Maximum duty cycle	1.2	1.4		

Total device

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Standby supply current	$I_{STANDBY}$	Off-state		4.0	5.5	mA
Average supply current	I_{AVE}	$R_T = 10K$		4.5	6.0	mA

TYPICAL CHARACTERISTICS

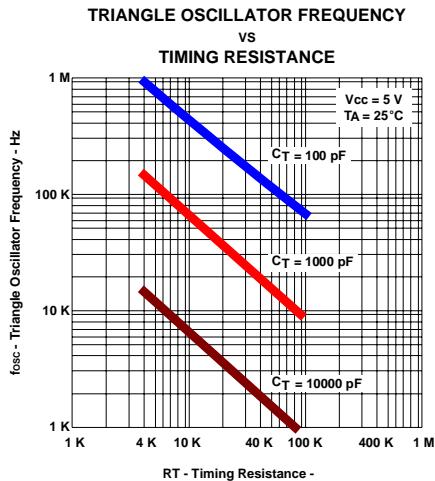


Figure 1

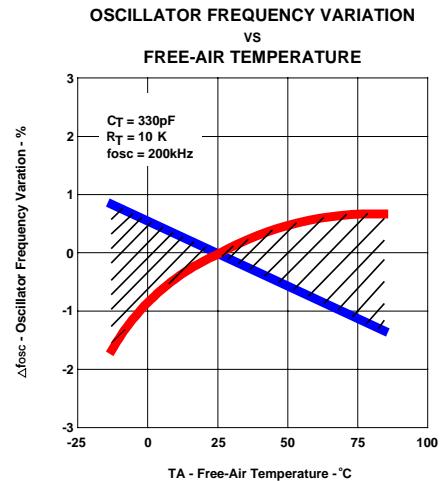


Figure 2

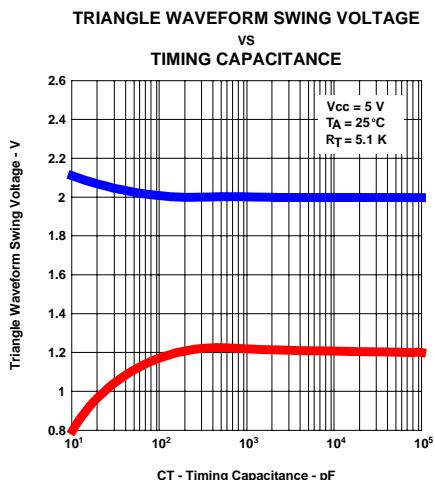


Figure 3

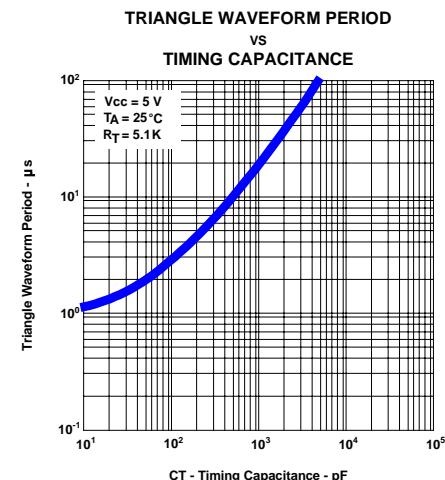


Figure 4

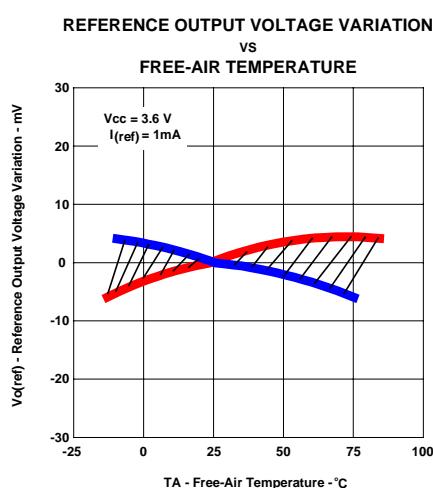


Figure 5

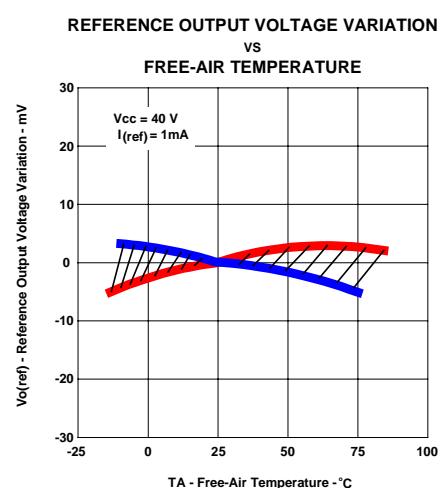


Figure 6

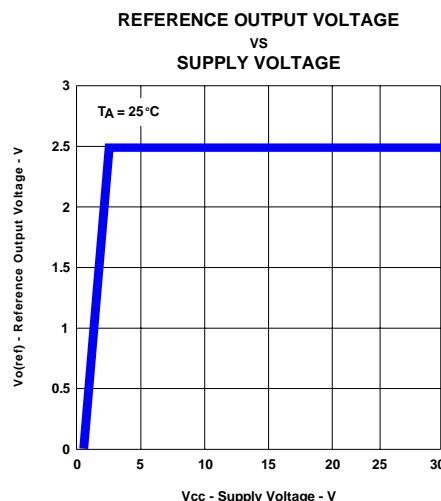
TYPICAL CHARACTERISTICS (Cont.)


Figure 7

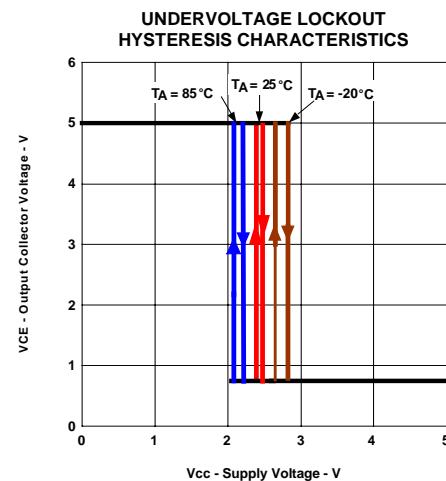


Figure 8

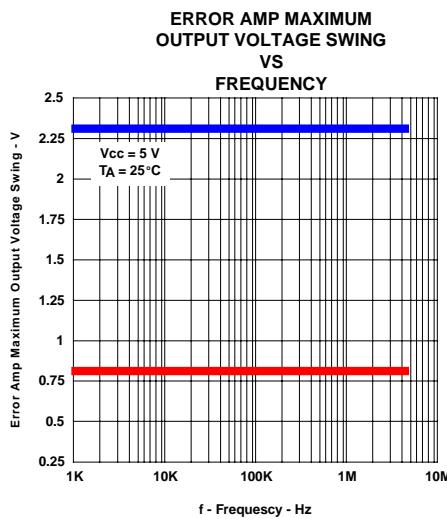


Figure 9

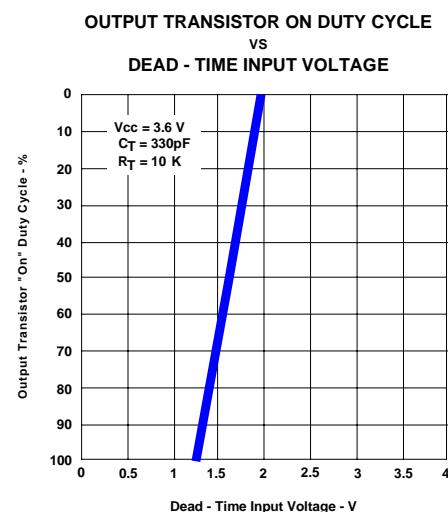


Figure 10

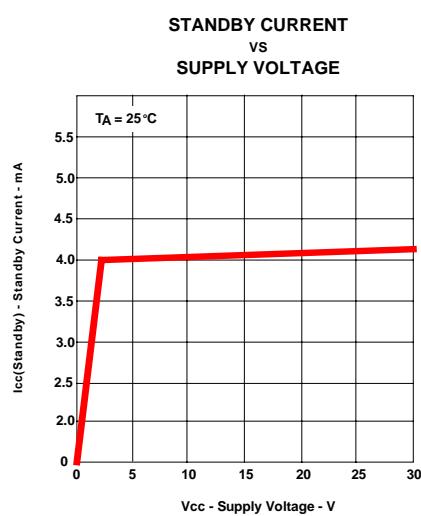


Figure 11

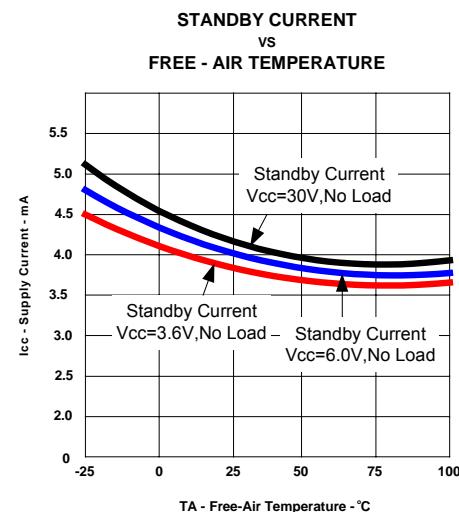


Figure 12

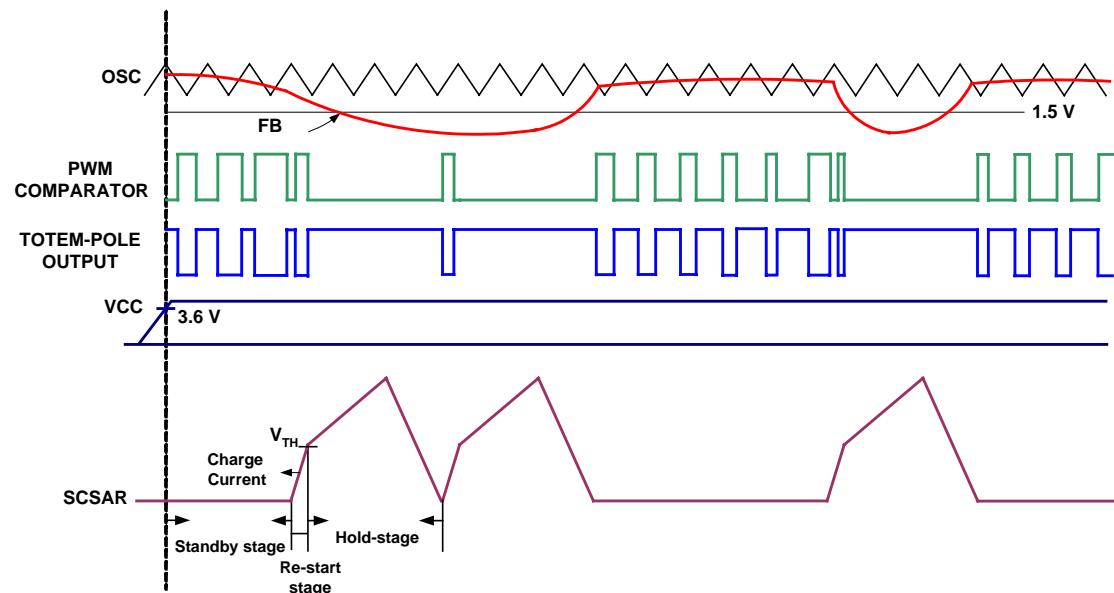
TIMING WAVEFORM


Figure 13. FP5453 Timing Diagram

DETAILED DESCRIPTION

Voltage Reference

FP5453 has an internal 2.5V reference regulator using for the internal circuits' voltage bias, and another function is using with the resistive divider connecting to the IC error amplifier inverting input for output feedback reference(see Fig 14).

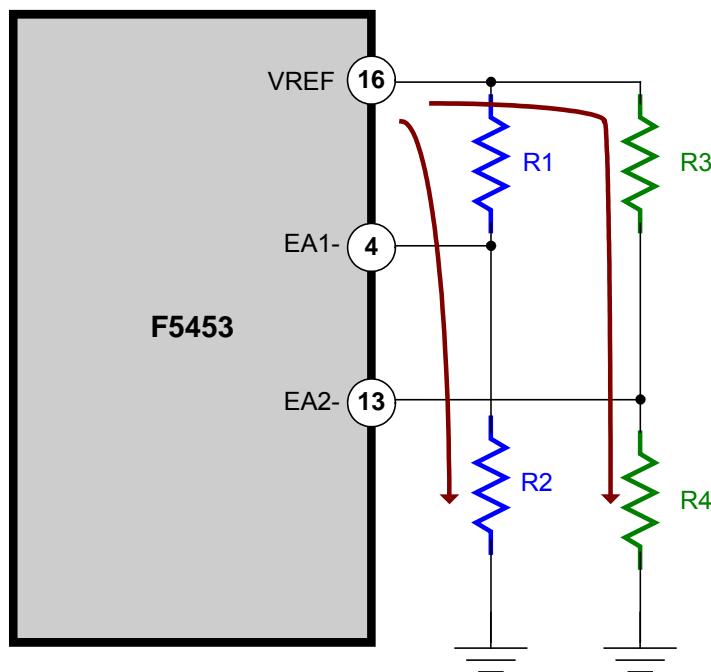


Figure 14. Reference and error amplifiers with resistive dividers

The error amplifier inverting input (EA1- or EA2-) reference voltage formulas are shown as below:

$$V_{EA1-} = VREF(2.5V) \times \frac{R2}{R1 + R2}$$

$$V_{EA2-} = VREF(2.5V) \times \frac{R4}{R3 + R4}$$

And we will discuss both relationship of the output voltage and error amplifier reference voltage next page.

Error Amplifier

The error amplifiers of **FP5453** compare the feedback voltage from the resistive dividers of dc-dc converter output to the reference bias(see Fig 15), and generate the error signal for the PWM comparator, the relation formulas are shown as below:

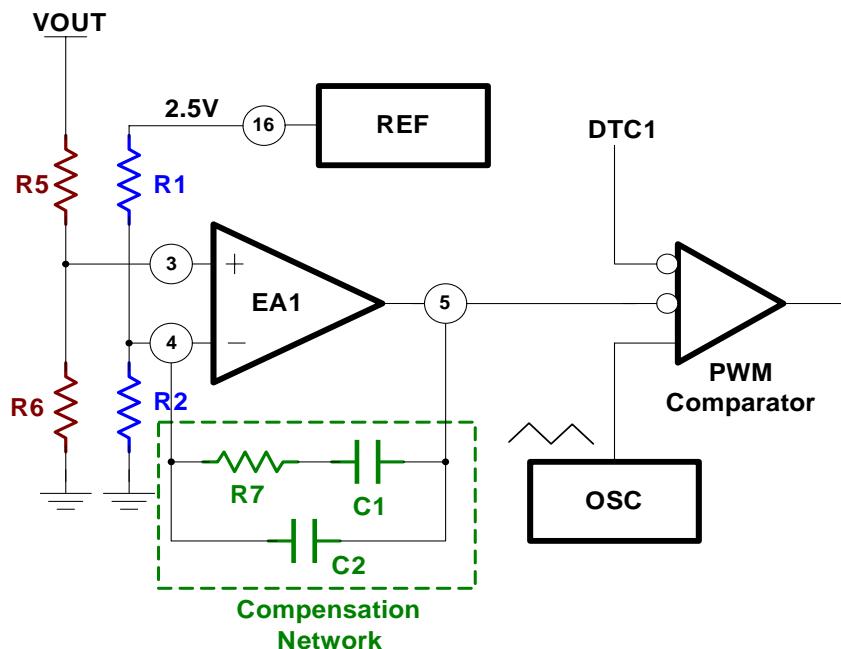


Figure 15. Error amplifier with Feedback/Compensation Circuits

The Buck converter output voltage:

$$V_{OUT} = \left(1 + \frac{R5}{R6}\right) \times \left(\frac{R2}{R1 + R2}\right) \times 2.5V$$

Error Amplifier Gain:

$$Av = 1 + \frac{1 + sR7C1}{sRi(C1 + C2)(1 + sR7C2)} , \text{Ri=R1//R2}$$

Error Amplifier Zero and Pole Frequency:

$$F_z = \frac{1}{2\pi R7C1} , \quad F_p = \frac{1}{2\pi R7C2}$$

Oscillator/PWM Comparator

The oscillator frequency can be decided from 20KHz to 1.2MHz by the resistor (RT) and capacitor (CT) which are connected with pin1 and pin2 of **FP5453**, a sawtooth waveform would compare with feedback signal of the error amplifier and dead-time control voltage, the figure 16 is the relationship of oscillator, error amplifier and PWM comparator, and figure 17 is the waveforms of **FP5453**.

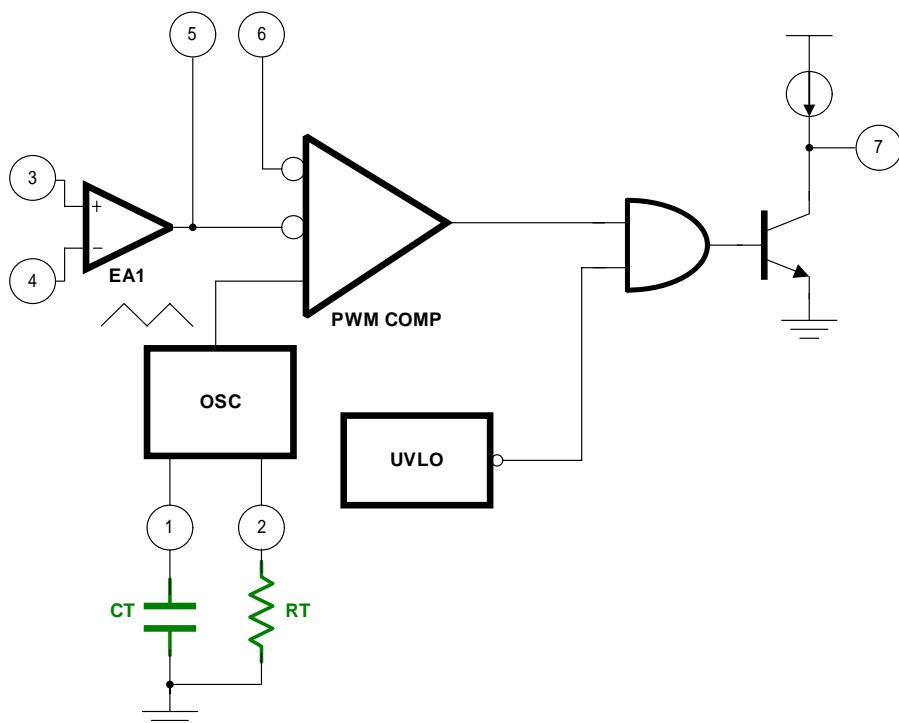


Figure 16. Oscillator/PWM Comparator with Frequency RC circuits

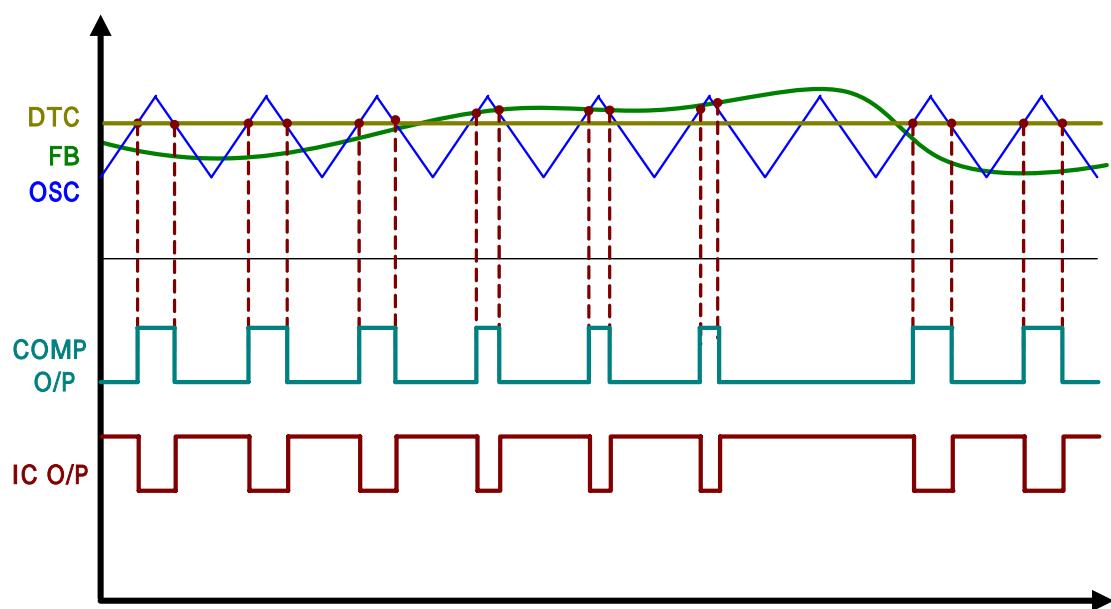


Figure 17. FP5453 Timing Waveforms

The relationship of oscillator waveform and dead-time voltage is shown below (see Fig 18):

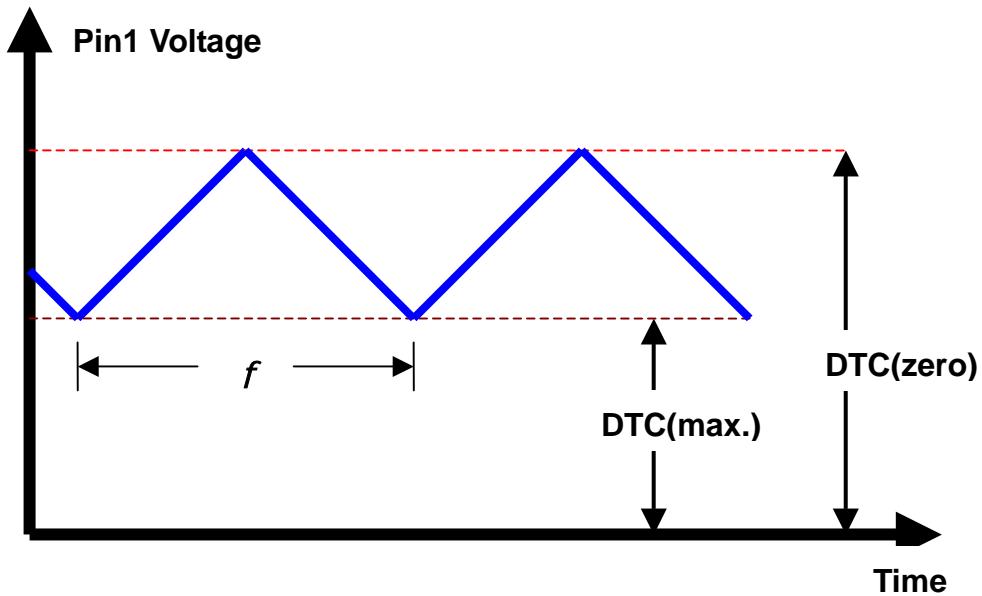


Figure 18. Oscillator Frequency with DTC voltage

The oscillator frequency calculation formula is shown as below:

$$f = \frac{VT}{2 * CT * RT * (V_{Zero} - V_{max.})}$$

Dead-Time Control/Soft-Start

The dead-time control (DTC) is a function for the PWM duty cycle limitation, if the DTC voltage is lower than DTC maximum voltage (typ. 1.35V), the PWM duty cycle can change to 100% cycle; and if the DTC voltage is higher than DTC zero voltage (typ. 2.0V), the PWM duty cycle should always turn-off (zero duty).

The system of DC-DC converter can use DTC function with an external RC for Power-On soft-start (see Fig 19) and a simple formula to calculate the soft-start time.

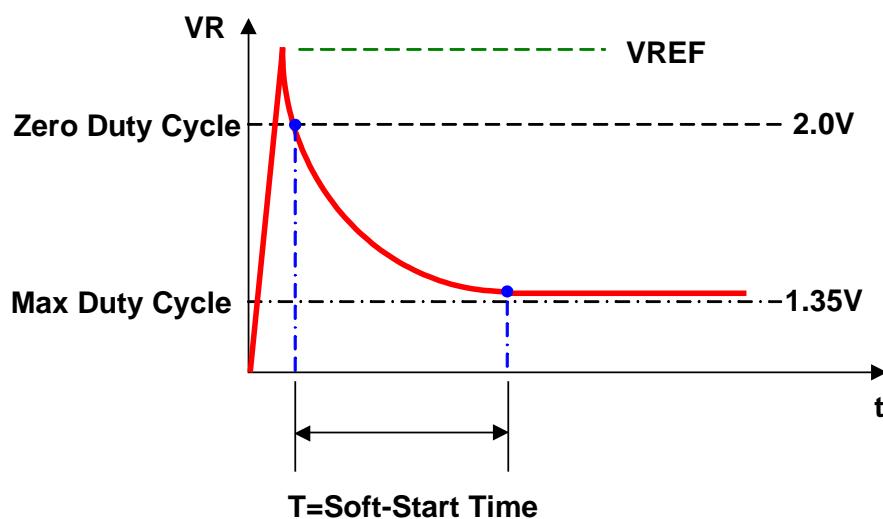
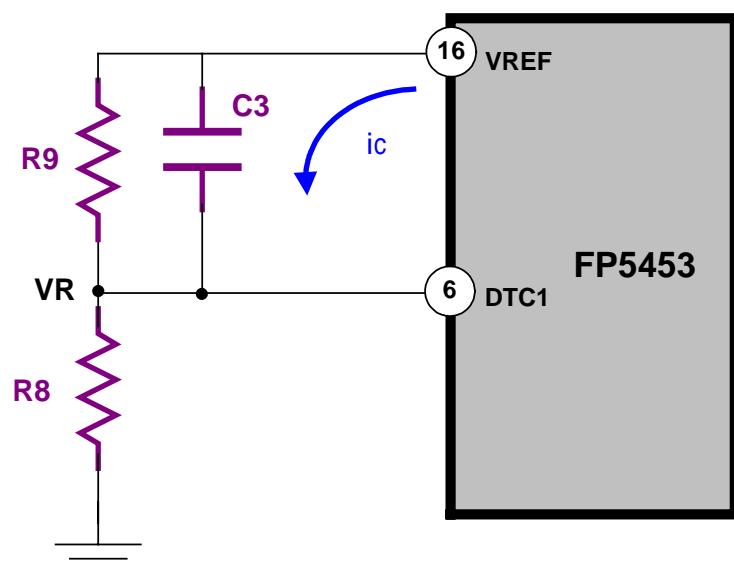


Figure 19. DTC Soft-start RC circuit and waveform

The soft-start time formula:

$$t = 5 * \left(\frac{R9 * R8}{R9 + R8} \right) * C3$$

Short-circuit shutdown and auto re-start protection (SCSAR)

FP5453 includes short-circuit shutdown and auto re-start protection function (see Figure 20), which turns the Power MOS off to prevent damage when the converter output is over loading or short circuit.

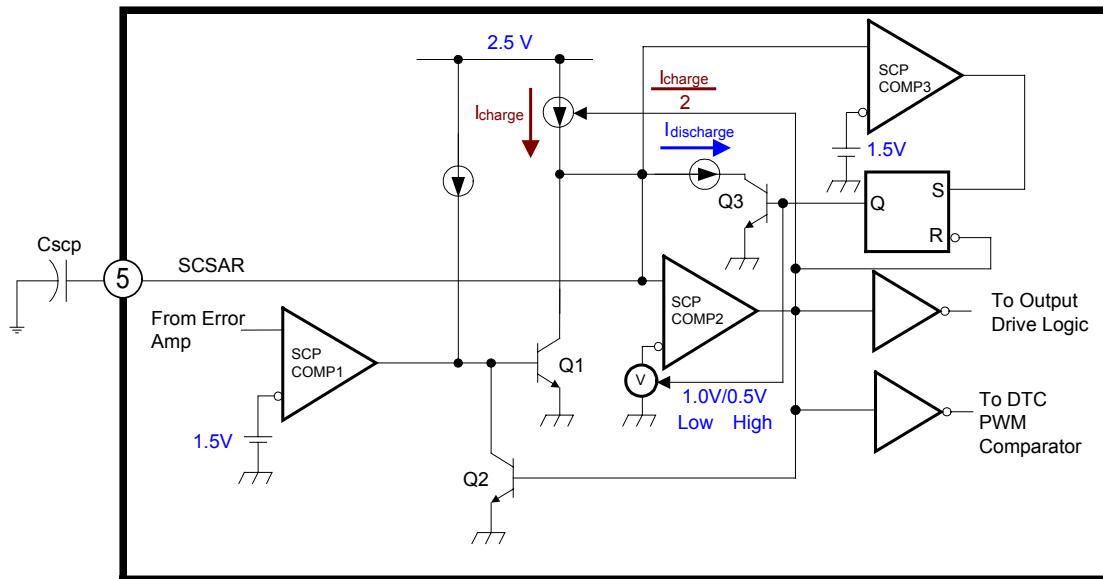


Figure 20. SCSAR Protection Circuit

Generally, error amplifier output voltage is higher than 1.5V, and SCP comparator 1 output keeps a high state and Q1 is turn-on, C_{SCP} cannot be charged. When short circuit occurs, the COMP pin of error-amplifier would under more than 1.50V, SCP comparator 1 output changes to low state and C_{SCP} is charged by I_{CHARGE} current. The SC function of **FP5453** is release because short circuit is removed before Q2 active and SCP comparator 2 is latch. When C_{SCP} is charged until a 1.0V threshold voltage and SCP comparator 2 output changes to high state and Q2 is turn-on to keep Q1 off in latch mode. Meanwhile, the source current of C_{SCP} would change half of original current for the first shutdown phase, **FP5453** output is turn-off and DTC pin is pull-low. When C_{SCP} voltage is greater than 1.5V of SCP comparator 3, the output of S-R Latch would turn on Q3 and change SCP comparator 2 from 1.0V to 0.5V, when SCP comparator 3 is active, C_{SCP} is discharged until SCP comparator 2 is release the latch state, output of **FP5453** is active and DTC pin is working in soft-start state or limitation of duty cycle.

C_{SCP} discharging time from 1.5V to 0.5V is the second shutdown phase which finishes and **FP5453** would be release shutdown state and re-start the normal operation. Figure 21 is a relation description about SCSAR pin and the other pins of **FP5453**.

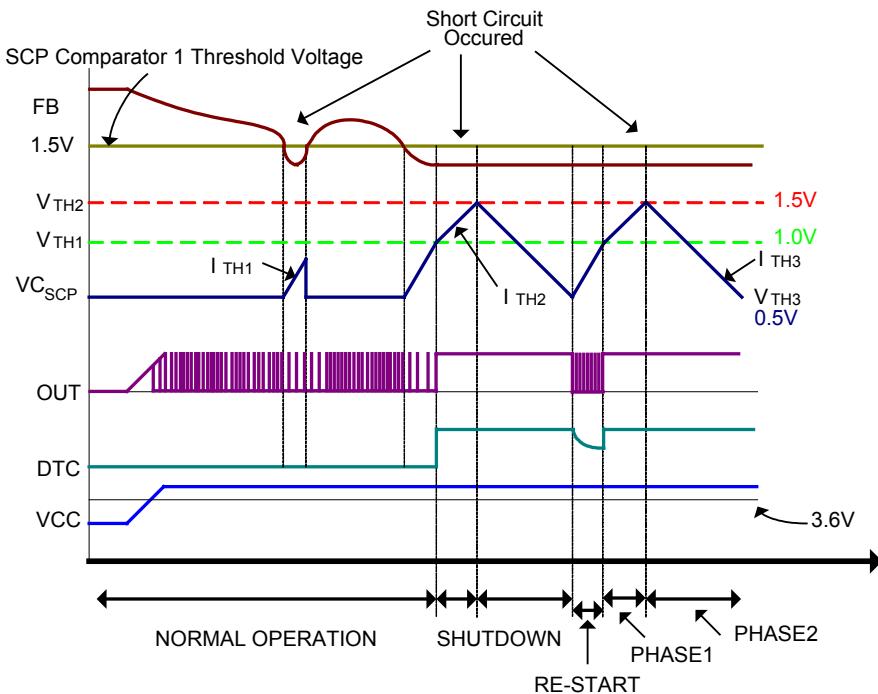


Figure 21. Shutdown and Re-start waveform

The formulas are shown below for shutdown and re-start time calculation:

AUTO RE-START time equation:

$$t_{RE-START} = \frac{V_{TH1} * C_{SCP}}{I_{TH1}}$$

SHUTDOWN time equation:

$$t_{SHUTDOWN} = t_{PHASE1} + t_{PHASE2} = \frac{(V_{TH2} - V_{TH1}) * C_{SCP}}{I_{TH2}} + \frac{(V_{TH2} - V_{TH3}) * C_{SCP}}{I_{TH3}}$$

Output transistors

The output of the **FP5453** is a totem-pole transistor pair, which supplies source and sink current capacity for driving the external MOSFET directly, a basic drive method is shown as figure 22.

When PWM operation frequency is different, the both of on and off time of MOSFET also are different.

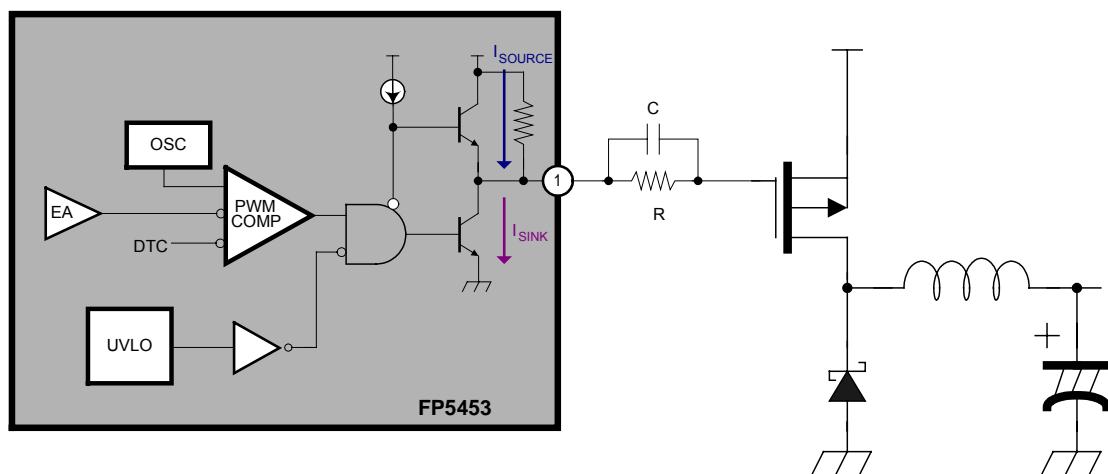
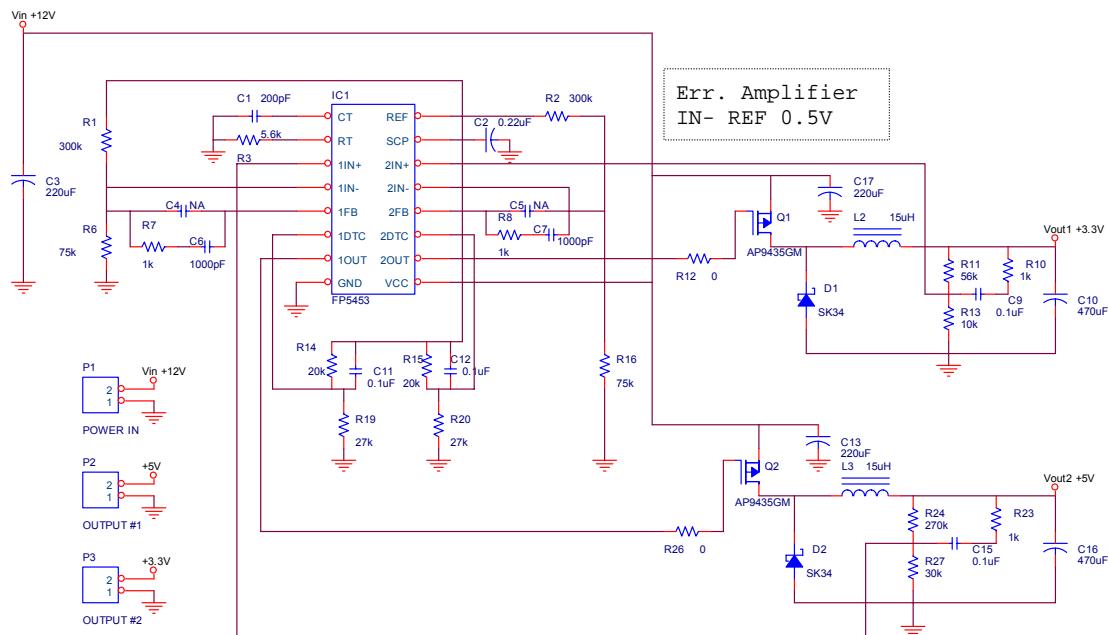


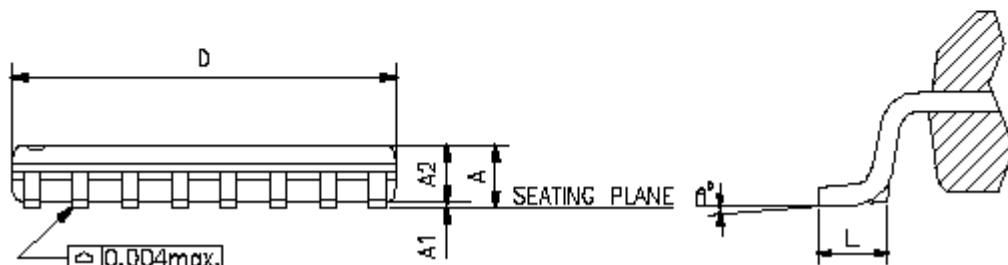
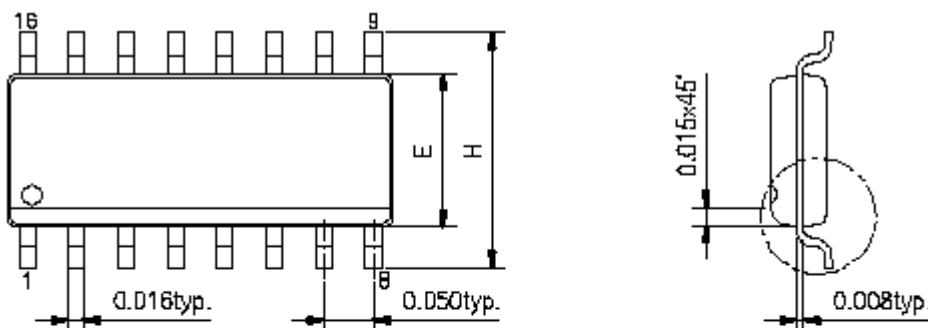
Figure 22. FP5453 MOSFET Output Driving Circuit

Note:

It is very important to choose a suitable MOSFET for high frequency operation. The larger capacitor between gate and source of MOSFET has more switching loss under the same condition as high frequency operation, supply voltage and driving current.

APPLICATION NOTE

Figure 23. 2-channel dc-dc converter circuit
Note

1. The $IN1-$ and $IN2-$ is $1.25V$ a half of V_{REF} voltage because $R1=R6$ and $R2=R16$.
2. The $R14-R19-C11$ and $R15-R20-C12$ are a DTC circuits for Buck Regulators power-on.
3. The $R11-R13$ and $R24-R27$ are the buck regulator output voltage feedback resistances.
4. The $R7-C4-C6$ is the compensation circuit for error amplifier 1 of FP5453.
5. The $R8-C5-C7$ is the compensation circuit for error amplifier 2 of FP5453.
6. The $R3-C1$ is an external RC circuit for FP5453 internal oscillator.
7. The $C2$ is FP5453 short circuit protection delay time capacitor.

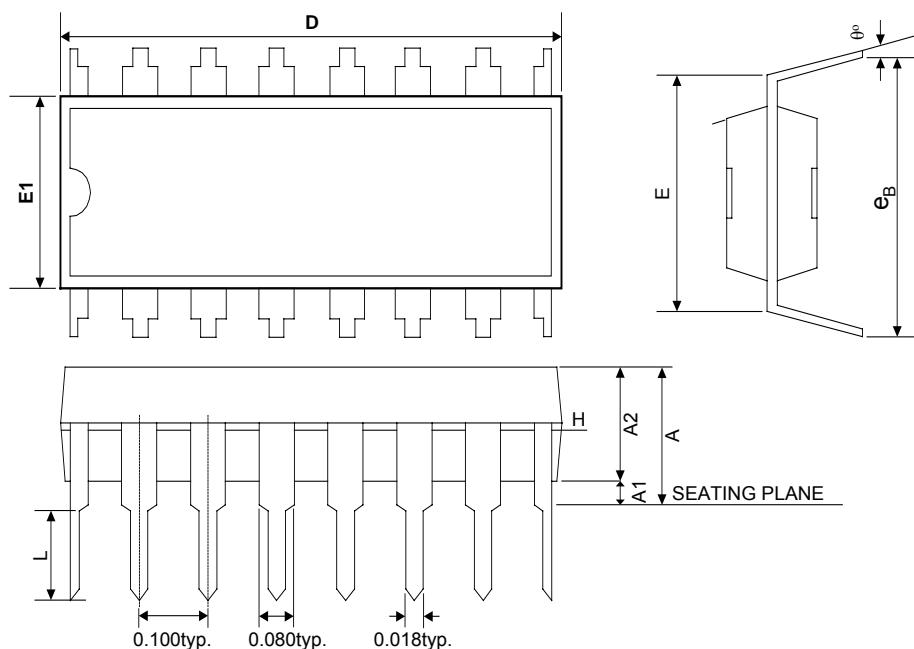
PACKAGE OUTLINE
SOP-16L


SYMBOLS	MIN	MAX
A	0.053	0.069
A1	0.004	0.010
D	0.386	0.394
E	0.150	0.157
H	0.228	0.244
L	0.016	0.050
°	0	8

UNIT:INCH

NOTE:

- 1.JEDEC OUTLINE:MS-012 AC
- 2.DIMENSIONS "D" DOES NOT INCLUDE MOLD FLASH,PROTRUSIONS OR GATE BURRS.MOLD FLASH,PROTRUSIONS AND GATE BURRS SHALL NOT EXCEED .15mm (.06in) PER SIDE
- 3.DIMENSIONS "E" DOES NOT INCLUDE INTER-LEAD FLASH,OR PROTRUSIONS.
- 4.INTER-LEAD FLASH AND PROTRUSIONS SHALL NOT EXCEED .25mm (.10in) PER SIDE.

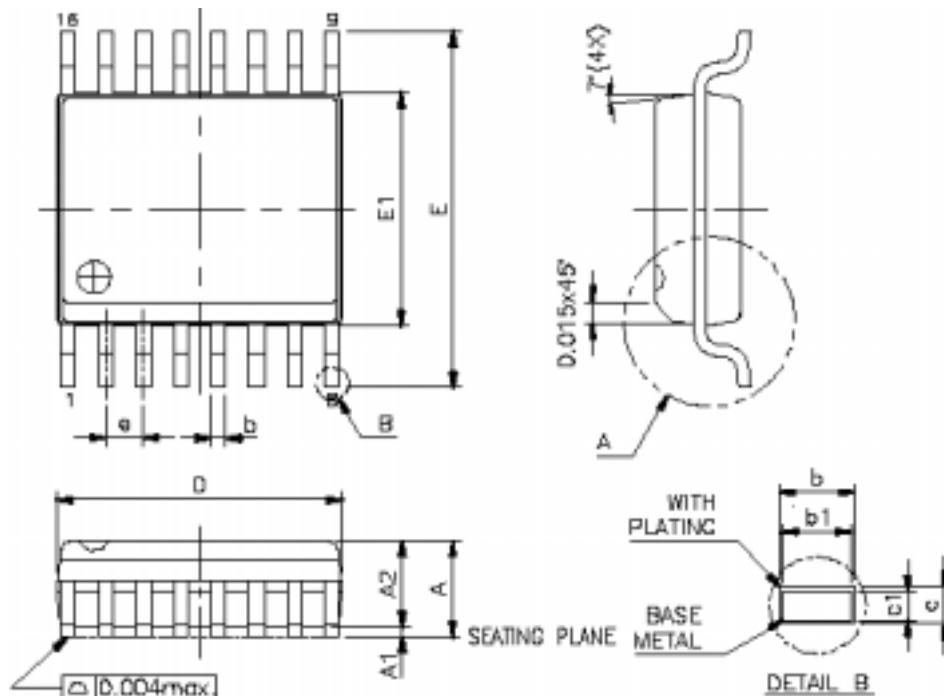
PDIP-16L


SYMBOLS	MIN.	NOR.	MAX.
A	—	—	0.210
A1	0.015	—	—
A2	0.125	0.130	0.135
D	0.735	0.755	0.775
E	0.300 BSC.		
E1	0.245	0.250	0.255
L	0.115	0.130	0.150
e _B	0.335	0.355	0.375
°	0	7	15

UNIT:INCH

NOTES:

- 1.JEDEC OUTLINE: MS-001 BB
- 2.“D”, “E1” DIMENSIONS DO NOT INCLUDE MOLD FALSH OR PROTRUSIONS. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH.
- e_B IS MEASURED AT THE LEAD TIPS WITH THE LEADS UNCONSTRAINED.
POINTED OR ROUNDED LEAD TIPS ARE PREFERRED TO EASE INSERTION.
- 3.DISTANCE BETWEEN LEADS INCLUDING DAM BAR PROTRUSIONS TO BE .005 INCH MINIMUM.
- 4.DATUM PLANE CONCIDENT WITH THE BOTTOM OF LEAD, WHERE LEAD EXITS BODY.

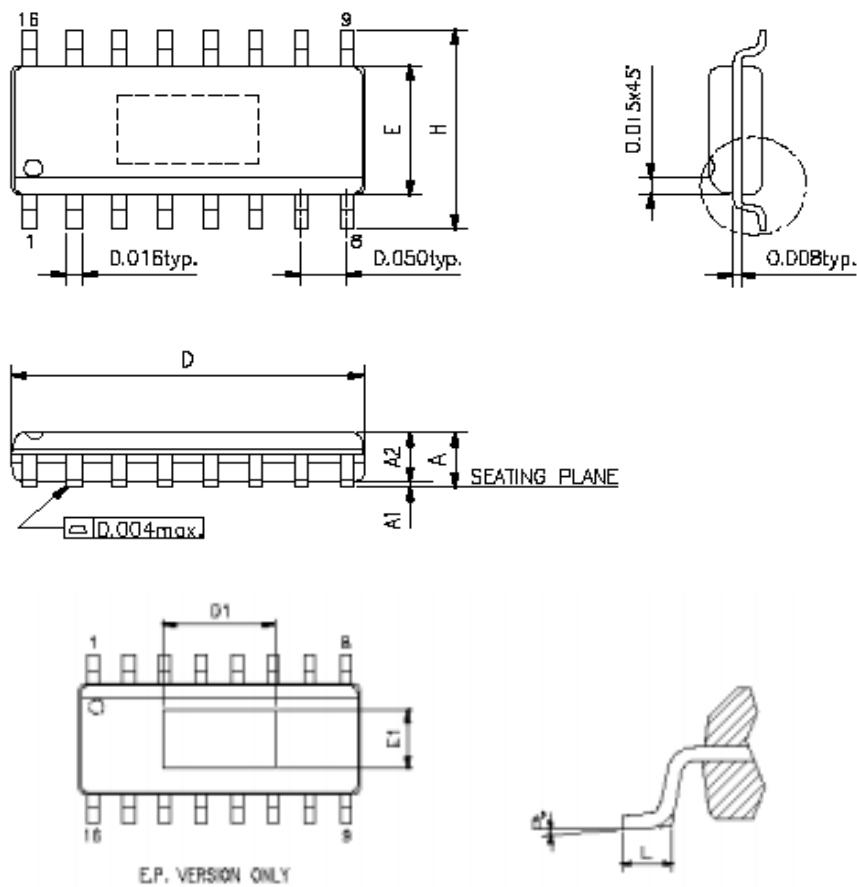
SSOP-16L


SYMBOLS	MIN.	MAX.
A	0.053	0.069
A1	0.004	0.010
A2	-	0.059
b	0.008	0.012
b1	0.008	0.011
c	0.007	0.010
c1	0.007	0.009
D	0.189	0.197
E	0.228	0.244
E1	0.150	0.157
L	0.016	0.050
e	0.025 Basic	
°	0	8

UNIT:INCH

NOTES:

- 1.JEDEC OUTLINE: MO-137 AB
- 2.“D”,DIMENSIONS DO NOT INCLUDE MOLD FALSH OR PROTRUSIONS. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .15mm(006in).
- 3.“E”,DIMENSIONS DO NOT INCLUDE MOLD FALSH OR PROTRUSIONS. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .25mm(010in) PER SIDE.
- 4.DATUM PLANE CONCIDENT WITH THE BOTTOM OF LEAD, WHERE LEAD EXITS BODY.

SOP16-L(EP)


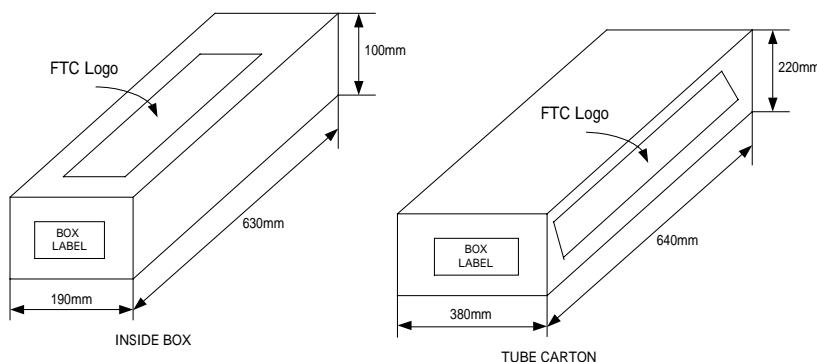
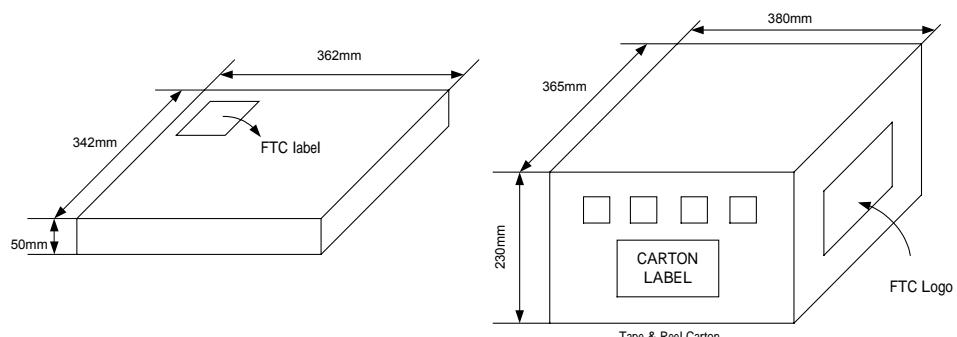
SYMBOLS	MIN	MAX
A	0.053	0.069
A1	0.004	0.010
D	0.386	0.394
E	0.150	0.157
H	0.228	0.244
L	0.016	0.050
°	0	8

PAD SIZE	E1	D1
A	0.086 REF	0.162 REF

UNIT:INCH

NOTE:

1. DIMENSIONS "D" DOES NOT INCLUDE MOLD FLASH,PROTRUSIONS OR GATE BURRS.MOLD FLASH,PROTRUSIONS AND GATE BURRS SHALL NOT EXCEED .15mm (.06in) PER SIDE
2. DIMENSIONS "E" DOES NOT INCLUDE INTER-LEAD FLASH,OR PROTRUSIONS.
3. INTER-LEAD FLASH AND PROTRUSIONS SHALL NOT EXCEED .25mm (.10in) PER SIDE.

PACKING SPECIFICATIONS
BOX DIMENSION
TUBE INSIDE BOX AND CARTON

TAPE AND REEL INSIDE BOX AND CARTON

PACKING QUANTITY SPECIFICATIONS

50 EA/TUBE	2500 EA / REEL
50 TUBES / INSIDE BOX	4 INSIDE BOXES / CARTON
4 INSIDE BOXES / CARTON	

LABEL SPECIFICATIONS
TAPPING & REEL

Feeling Technology Corp.
 Product FP5453DR-LF
 Lot No A3311C62-L
 D/C 4Xx-XXL
 Q'ty

無鉛
Lead Free

CARTON

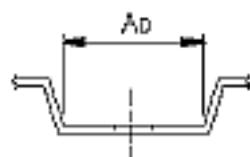
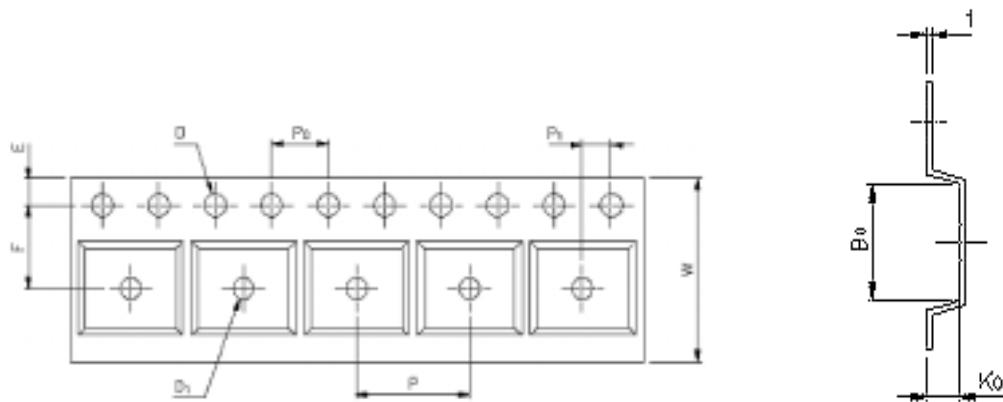
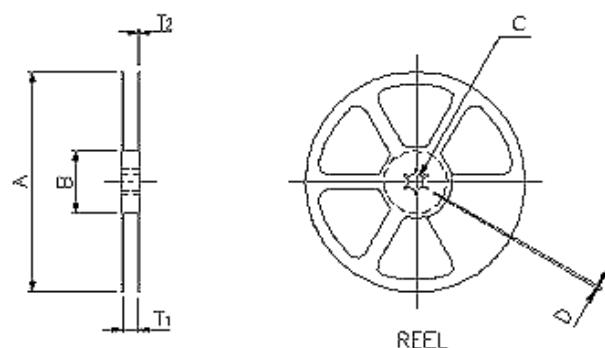
Feeling Technology Corp.
 Product Type: FP5453DR-LF
 Lot No: A3311C62-L
 Date Code: 4Xx-XXL
 Package Type: SOP-8L
 Marking Type: Laser
 Total Q'ty: 10,000

無鉛
Lead Free

SOP16
CARRIER TAPE DIMENSIONS

APPLICATION	W	P	E	F	D	D ₁
SOP16	16.0±0.3	8.0±0.1	1.75±0.1	7.5±0.1	1.55 ^{+0.1}	1.5 ^{+0.25}

APPLICATION	P ₀	P ₁	A ₀	B ₀	K ₀	t
SOP16	4.0±0.1	2.0±0.1	6.5±0.1	10.3±0.1	2.1±0.1	0.30±0.05

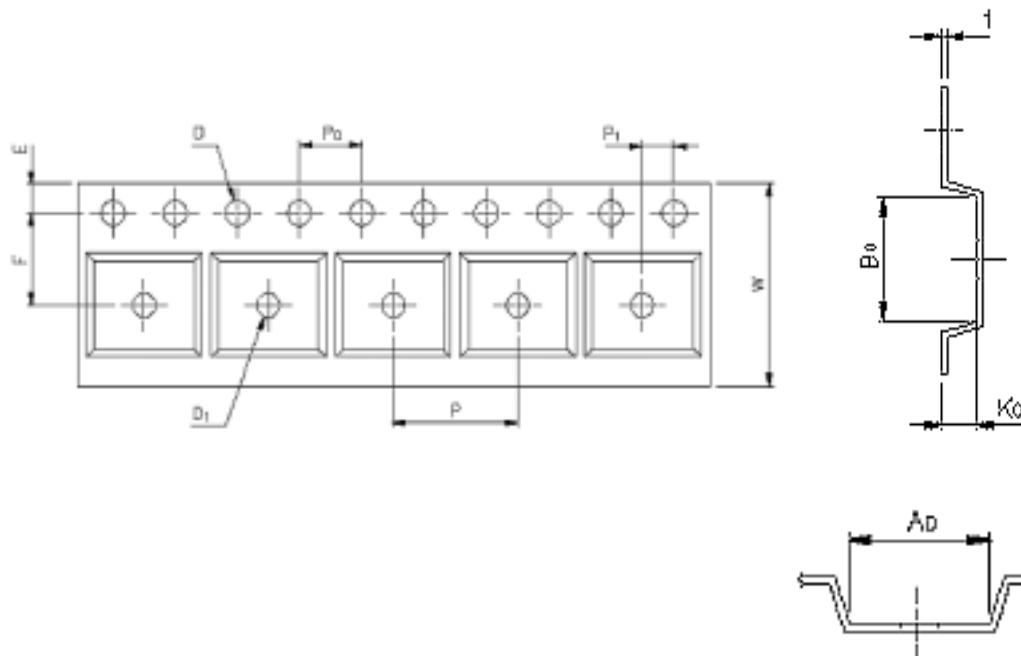
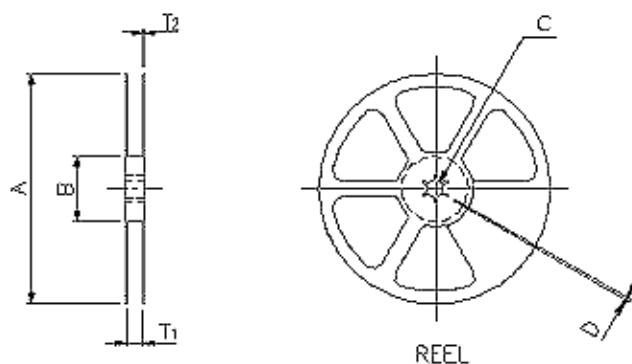

REEL DIMENISONS


APPLICATION	MATERIAL	A	B	C	D	T1	T2
SOP16	PLASTIC REEL	330±3	100±2.0	13.0±0.5	2.0±0.5	16.4 ^{+0.3} _{-0.2}	2.5±0.5

SSOP16
CARRIER TAPE DIMENSIONS

APPLICATION	W	P	E	F	D	D ₁
SSOP16	12.0±0.3	8.0±0.1	1.75±0.1	5.5±0.05	1.5 ^{+0.1}	1.5 ^{+0.25}

APPLICATION	P ₀	P ₁	A ₀	B ₀	K ₀	t
SSOP16	4.0±0.1	2.0±0.05	6.5±0.1	10.3±0.1	2.1±0.1	0.30±0.05


REEL DIMENISSIONS


APPLICATION	MATERIAL	A	B	C	D	T1	T2
SSOP16	PLASTIC REEL	330	62	12.75 ^{+0.15}	2.0±0.15	12.4	16.8