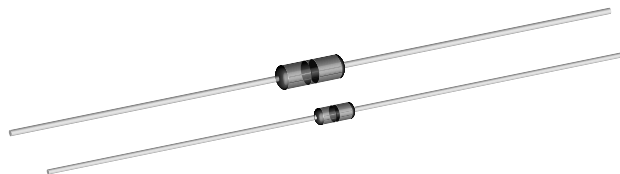


FRJ-50, FRJ-55

Vishay Dale

**Metal Film Resistors, Industrial, Zero Ohm Jumper Resistor****FEATURES**

- Provides low resistance circuit interconnections
- Color band marking for ease of identification after mounting
- Flame retardant coating
- Compatible with automatic insertion equipment
- Tape and reel packaging

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	MAXIMUM RESISTANCE VALUE mΩ	MAXIMUM CURRENT A	
		@ + 25°C	@ + 150°C
FRJ-50	10	25	0
FRJ-55	10	25	0

TECHNICAL SPECIFICATIONS

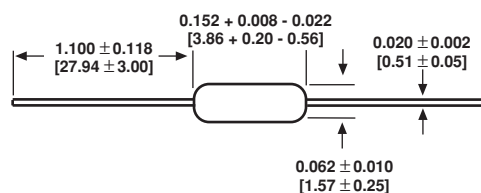
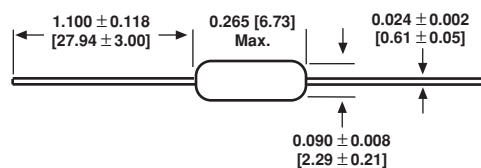
PARAMETER	UNIT	FRJ-50	FRJ-55
Insulation Resistance - Dry	MΩ	10,000	10,000
Insulation Resistance - Wet	MΩ	100	100
Category Temperature Range	°C	- 55 / + 155	- 55 / + 155
Dielectric Strength - Atmospheric - Reduced	V _{RMS}	500	500
	V _{RMS}	325	325
Failure Rate	10 ⁻⁹ /h	< 10	< 10
Weight	g	0.1	0.2

MATERIAL SPECIFICATIONS

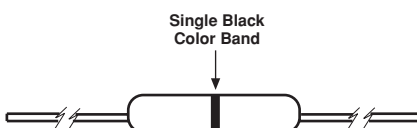
Insulation Flammability:	Self extinguishing 10 seconds after flame is removed	Lead Material:	Tin-plated copper (maximum 98% tin)
--------------------------	--	----------------	-------------------------------------

ORDERING INFORMATION

FRJ	55
MODEL	SIZE
Zero Ohm Jumper	50
	55

**DIMENSIONS** in inches [millimeters]**FRJ-50****FRJ-55**

DataSheet4U.com

MARKING**PACKAGING**

Taped Lead and Reel Package
(52.4mm inside tape spacing per EIA-296-E).

Notes:

1. Quantity per reel: 5,000 pieces in 5,000-piece increments.
2. A minimum of 12.0" [305mm] bare tape leader shall be provided at each end of the reel.
3. Paper separator protection between layers of components.
4. Reel arbor hole is 1.25" [31.75mm].