


Surface Mount Glass Passivated Standard Rectifier

Reverse Voltage 50V ~ 1000V , Forward Current 1.0 Amps

Features

- Glass passivated Standard rectifiers
- Compatible with SOD-123
- **Super low VF**
- **High forward surge capability**
- Moisture sensitivity: level 1, per J-STD-020
- AEC-Q101 qualified
- Low profile, Max height 1.08mm



SMF

MECHANICAL DATA

- Case: JEDEC SOD-123 molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any
- Weight: 0.01 gram

TYPICAL APPLICATIONS

For use of general purpose rectification in lighting, cellular phone, portable device, power supplies and other consumer applications.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave 60Hz,,resistive or inductive load. For capacitive load, derate by 20%.)

Parameter		Symbols	G1A	G1B	G1D	G1G	G1J	G1K	G1M	Units
Maximum Recurrent Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum average Forward Rectified Current 0.375"(9.5mm) lead length at T _A =75°C		I(AV)	1.0							Amp
Peak Forward Surge Current (8.3ms half sine-wave superimposed on rated load (JEDEC method) T _A =75°C		I _{FSM}	30							Amps
Maximum Instantaneous Forward Voltage at 1.0 A		V _F	1.1							Volts
Maximum Reverse current at rated DC Blocking Voltage	T _A =25 °C	I _R	5.0							μ A
	T _A =125 °C		50.0							
Typical Thermal resistance (Note 2)		R _θ JL	20							°C/W
Typical Junction Capacitance(Note 1)		C _J	15							pF
Operating and Storage temperature Range		T _J T _{STG}	-55 ~ +150							°C

Note: 1.Measured at 1MHz and applied reverse voltage of 4.0V DC.

2.Thermal resistance from junction to ambient and from junction to lead at 0.375"(9.5mm)lead length,
P.C.B. mounted

RATING AND CHARACTERISTIC CURVES

FIG.1-FORWARD CURRENT DERATING CURVE

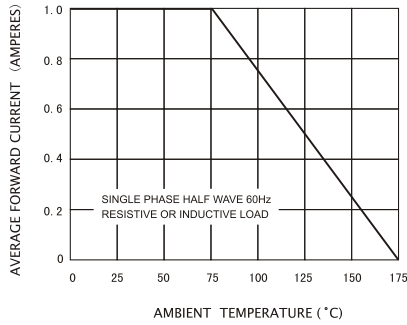


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

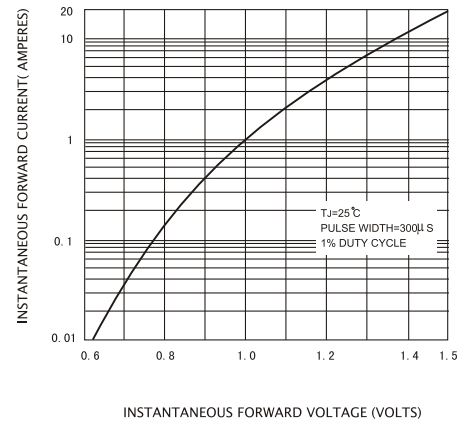


FIG.3-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

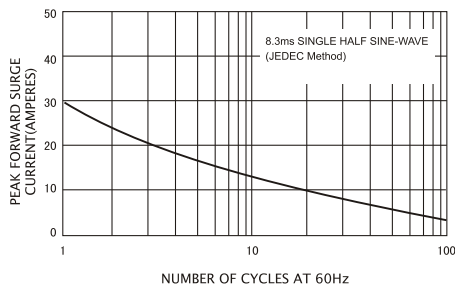


FIG.4-TYPICAL REVERSE CHARACTERISTICS



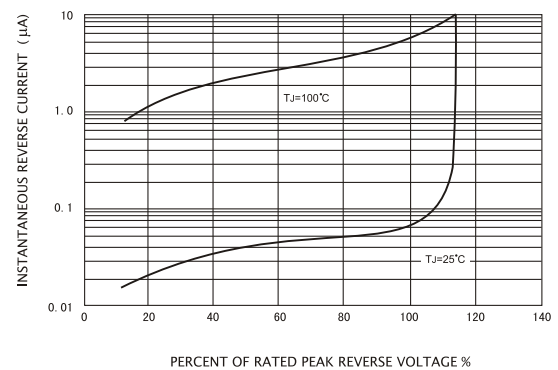




FIG.5-TYPICAL JUNCTION CAPACITANCE

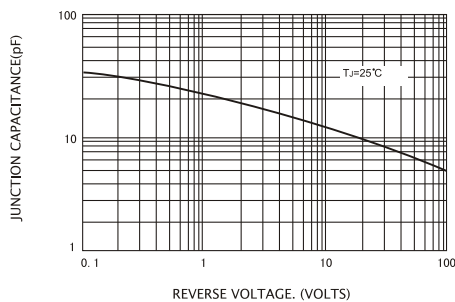


PACKAGE OUTLINE DIMENSIONS (in millimeters)

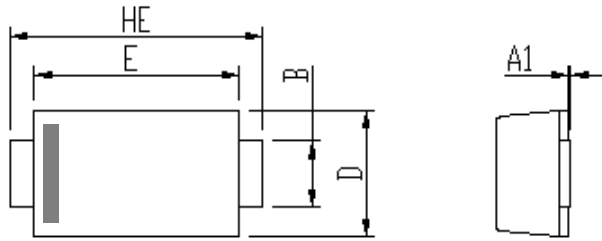

DIM	Unit: mm		Unit: inch	
	MIN	MAX	MIN	MAX
A	1.0	1.2	0.035	0.043
A1	0	0.1	0.000	0.004
b	0.90	1.10	0.033	0.041
c	0.1	0.25	0.004	0.010
D	1.6	1.9	0.067	0.079
E	2.5	2.9	0.114	0.122
L	0.40	0.90	0.017	0.033
HE	3.6	3.9	0.138	0.154

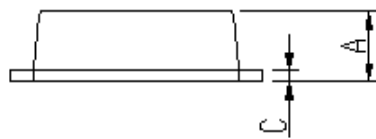

Soldering footprint

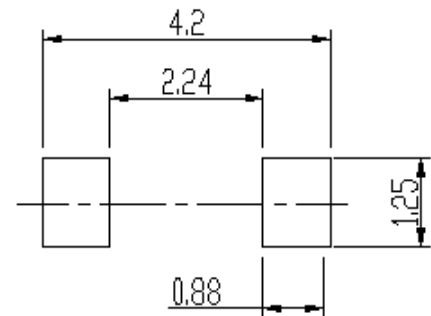

PACKING INFORMATION

Packing quantities:

3000 pcs/Reel, 40 Reels/Box; 8mm Tape, 7" Reel

Tape & Reel Specification

