

**NEW!**

Flyback Transformers



- Designed for input range of 10 – 14 V.
- 1500 Vrms isolation from primary and bias to secondary; 500 Vrms isolation from primary to bias, tested for one minute
- The bias winding provides power to the chipset

Core material Ferrite

Terminations RoHS tin-silver over tin over nickel over phos bronze. Other terminations available at additional cost.

Weight 3.9 to 4.1 g

Ambient temperature –40°C to +85°C

Storage temperature Component: –40°C to +85°C.
Packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)
38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 250 per 13" reel Plastic tape: 32 mm wide, 0.5 mm thick, 20 mm pocket spacing, 11.2 mm pocket depth

PCB washing Only pure water or alcohol recommended

Part number ¹	Inductance at 0 A ² ±10% (μH)	Inductance at I _{pk} ³ min (μH)	DCR max (mOhms) ⁴			Leakage inductance max (μH) ⁵	Turns ratio ⁶ pri : sec : bias	I _{pk} ³ (A)	Input voltage (V)	Output ⁷
			pri	sec	bias					
GA3430-BL_	25.0	22.5	90	15	95	0.685	5 : 1 : 1	2.1	10 – 14	5.0 V, 1.0 A
GA3431-BL_	25.0	22.5	90	5.0	70	0.945	7 : 1 : 1	2.1	10 – 14	3.3 V, 1.5 A


1. When ordering, please specify **packaging** code:

GA3431-BL D



Packaging: D = 13" machine-ready reel. EIA-481 embossed plastic tape (250 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.

- Inductance is for the primary, measured at 250 kHz, 0.3 Vrms, 0 Adc.
 - I_{pk} is peak primary current drawn at minimum input voltage.
 - DCR for the secondary is per winding.
 - Leakage inductance measured between pins 3 and 4 with all secondary pins shorted.
 - Turns ratio is with the secondary windings connected in parallel.
 - Output is with the secondary windings connected in parallel. Bias winding output: 5.0 V, 20 mA (GA3430); 3.3 V, 20 mA (GA3431).
 - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



Secondary windings to be connected in parallel on PC board

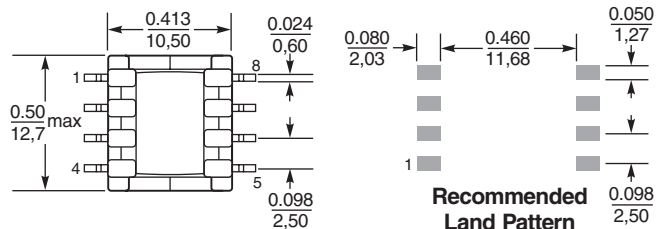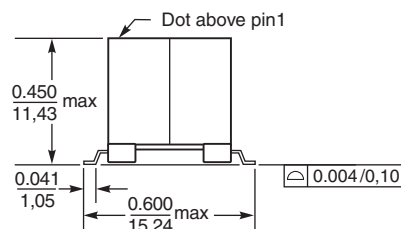

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

Coilcraft®

Specifications subject to change without notice.
Please check our website for latest information.

Document 864 Revised 05/04/10

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>