

GBP202-3

Europe Wide Band

[Inquire](#)

Application

for Spurious reduction

Characteristics


GBP202-3	
Zin/Zout	75 ohm Nominal
Pass Band	950 up to 1750MHz
Insertion Loss	2.5dB max (950 up to 1750MHz)
V.S.W.R	2.0 max (950 up to 1750MHz)
Attenuation	20dB min (0 up to 480MHz)
	20dB min (2000 up to 2710MHz)

Number of ordered pieces

500pcs/Reel

Dimensions

Dimension (Unit : mm)

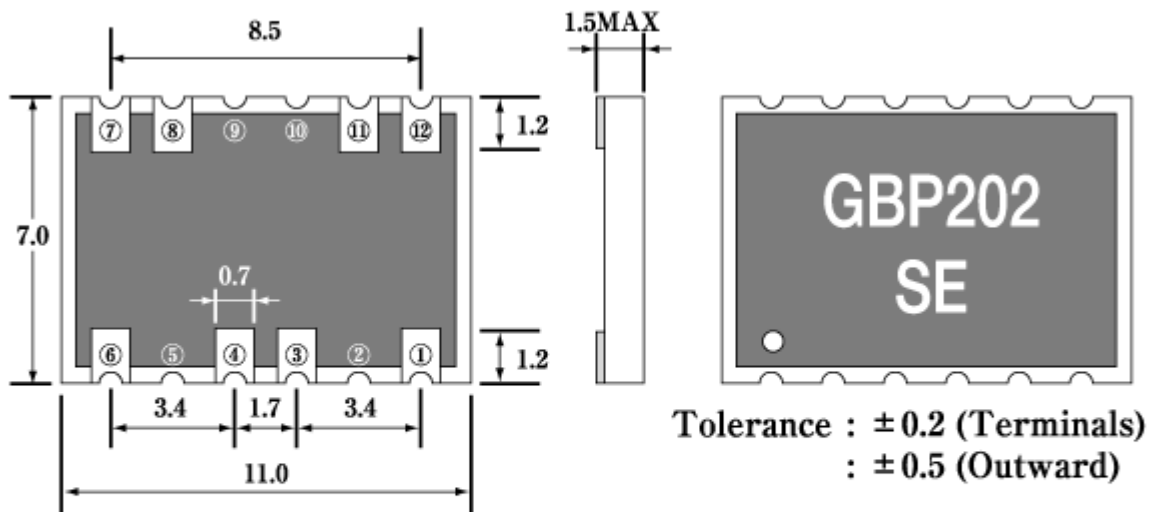

Terminal			
①	INPUT	⑦	GND
③	GND	⑧	GND
④	GND	⑪	GND
⑥	OUTPUT	⑫	GND

Note

Do not connect any wiring (inclusive of grounding) to terminals No.2,5,9 and No.10.

They are provided solely for internal connections.

Frequency Data

