



Bridge Rectifier


■ Features

- I_o 8A
- V_{RRM} 50V~1000V
- Glass passivated chip
- High surge forward current capability

■ Applications

- General purpose 1 phase Bridge rectifier applications

■ Outline Dimensions and Mark

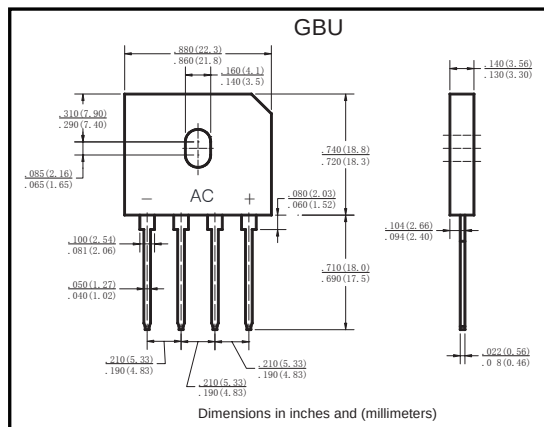

■ Limiting Values (Absolute Maximum Rating)

Item	Symbol	Unit	Conditions	GBU8						
				05	01	02	04	06	08	10
Repetitive Peak Reverse Voltage	V_{RRM}	V		50	100	200	400	600	800	1000
Average Rectified Output Current	I_o	A	60Hz sine wave, R-load	8						
				3.2						
Surge(Non-repetitive)Forward Current	I_{FSM}	A	60Hz sine wave, 1 cycle, $T_j=25^{\circ}\text{C}$	200						
Current Squared Time	I^2t	A^2S	$1\text{ms} \leq t < 8.3\text{ms}$ $T_j=25^{\circ}\text{C}$, Rating of per diode	166						
Storage Temperature	T_{stg}	$^{\circ}\text{C}$		-55 ~ +150						
Junction Temperature	T_j	$^{\circ}\text{C}$		-55 ~ +150						
Dielectric Strength	V_{dis}	KV	Terminals to case, AC 1 minute	2						
Mounting Torque	Tor	kg • cm	Recommend torque: 5kg • cm	8						

■ Electrical Characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Test Condition	Max
Peak Forward Voltage	V_{FM}	V	$I_{FM}=4\text{A}$, Pulse measurement, Rating of per diode	1.1
Peak Reverse Current	I_{RRM}	μA	$V_{RM}=V_{RRM}$, Pulse measurement, Rating of per diode	10
Thermal Resistance	$R_{\theta J-A}$	$^{\circ}\text{C}/\text{W}$	Between junction and ambient, Without heatsink	25
	$R_{\theta J-C}$		Between junction and case, With heatsink	2.3

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

FIG1: I_o - T_c Curve

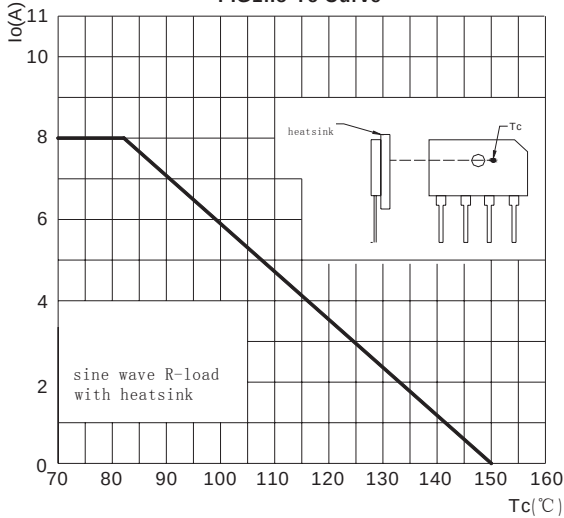


FIG2: Surge Forward Current Capability

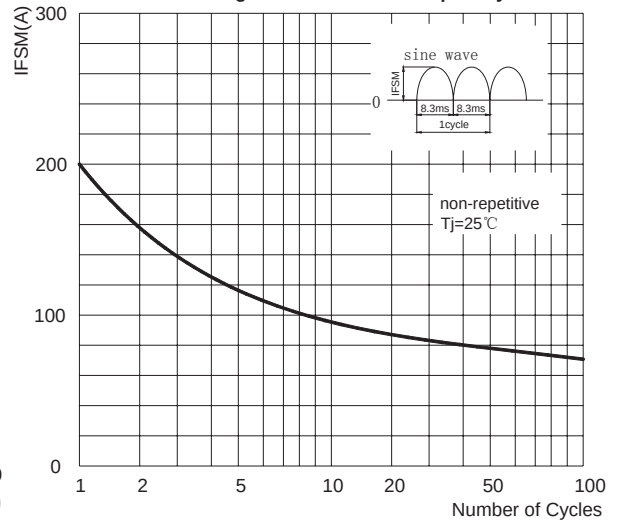


FIG3: Forward Voltage

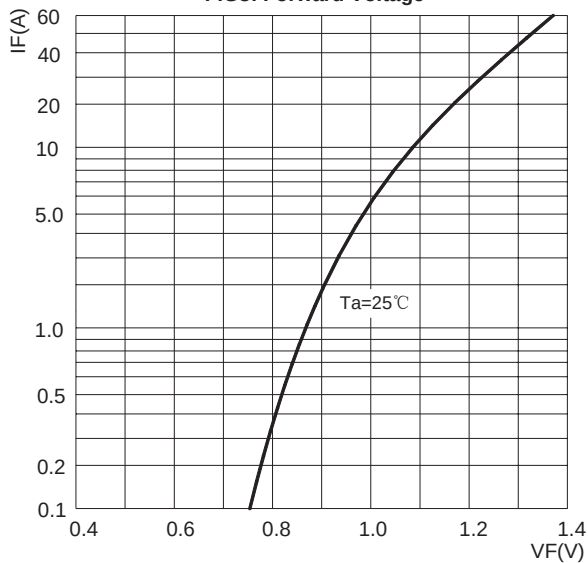


FIG4: Typical Reverse Characteristics

