



**Genesys Logic, Inc.**

---

**GL857L**

**USB 2.0 Hub Reader  
Controller**

**Datasheet**

**Revision 1.30  
Oct. 26, 2016**

## Copyright

Copyright © 2016 Genesys Logic, Inc. All rights reserved. No part of the materials shall be reproduced in any form or by any means without prior written consent of Genesys Logic, Inc.

## Ownership and Title

Genesys Logic, Inc. owns and retains of its right, title and interest in and to all materials provided herein. Genesys Logic, Inc. reserves all rights, including, but not limited to, all patent rights, trademarks, copyrights and any other propriety rights. No license is granted hereunder.

## Disclaimer

All Materials are provided “as is”. Genesys Logic, Inc. makes no warranties, express, implied or otherwise, regarding their accuracy, merchantability, fitness for any particular purpose, and non-infringement of intellectual property. In no event shall Genesys Logic, Inc. be liable for any damages, including, without limitation, any direct, indirect, consequential, or incidental damages. The materials may contain errors or omissions. Genesys Logic, Inc. may make changes to the materials or to the products described herein at anytime without notice.

## Genesys Logic, Inc.

12F., No. 205, Sec. 3, Beixin Rd., Xindian Dist. 231,

New Taipei City, Taiwan

Tel : (886-2) 8913-1888

Fax : (886-2) 6629-6168

<http://www.genesyslogic.com>

## Revision History

| Revision | Date       | Description                                   |
|----------|------------|-----------------------------------------------|
| 1.00     | 05/22/2014 | Formal release                                |
| 1.10     | 09/19/2014 | Updated CH3 Pin Assignment Description, p. 12 |
| 1.20     | 12/18/2014 | Added CH6.5 Power Consumption, p. 23          |
| 1.30     | 10/26/2016 | Modify T <sub>A</sub> range, p. 21            |

## Table of Contents

|                                                      |           |
|------------------------------------------------------|-----------|
| <b>CHAPTER 1 GENERAL DESCRIPTION</b>                 | <b>8</b>  |
| <b>CHAPTER 2 FEATURES</b>                            | <b>9</b>  |
| 2.1 General                                          | 9         |
| 2.2 USB 2.0 3-port Hub                               | 9         |
| 2.3 SD2.0 Card Reader                                | 9         |
| 2.4 Available Packages                               | 9         |
| <b>CHAPTER 3 PIN ASSIGNMENT</b>                      | <b>10</b> |
| 3.1 Pinouts                                          | 10        |
| 3.2 Pin List                                         | 11        |
| <b>CHAPTER 4 BLOCK DIAGRAM</b>                       | <b>14</b> |
| <b>CHAPTER 5 FUNCTION DESCRIPTION</b>                | <b>15</b> |
| 5.1 General Description                              | 15        |
| 5.1.1 USPORT Transceiver                             | 15        |
| 5.1.2 FRTIMER                                        | 15        |
| 5.1.3 OCCS USB PHY                                   | 15        |
| 5.1.4 $\mu$ C                                        | 15        |
| 5.1.5 UTMI (USB 2.0 Transceiver Microcell Interface) | 15        |
| 5.1.6 USPORT Logic                                   | 15        |
| 5.1.7 SIE (Serial Interface Engine)                  | 15        |
| 5.1.8 Control/Status Register                        | 16        |
| 5.1.9 REPEATER                                       | 16        |
| 5.1.10 TT (Transaction Translator)                   | 16        |
| 5.1.11 REPEATER/TT Routing Logic                     | 16        |
| 5.1.12 DSPORT Logic                                  | 17        |
| 5.1.13 DSPORT Transceiver                            | 17        |
| 5.1.14 Regulator                                     | 18        |
| 5.1.15 EP0 FIFO for Card Reader                      | 18        |
| 5.1.16 Bulk FIFO for Card Reader                     | 18        |
| 5.1.17 MHE (Media Interface) for Card Reader         | 18        |
| 5.1.18 8051/MCU                                      | 18        |
| 5.2 Configuration and I/O Settings                   | 19        |
| 5.2.1 RESET Setting                                  | 19        |
| 5.2.2 Port Number Configuration                      | 20        |
| <b>CHAPTER 6 ELECTRICAL CHARACTERISTICS</b>          | <b>21</b> |



|                                              |           |
|----------------------------------------------|-----------|
| <b>6.1 Maximum Ratings .....</b>             | <b>21</b> |
| <b>6.2 Operating Ranges .....</b>            | <b>21</b> |
| <b>6.3 Memory Card Clock Frequency .....</b> | <b>21</b> |
| <b>6.4 DC Characteristics .....</b>          | <b>22</b> |
| <b>6.5 Power Consumption .....</b>           | <b>23</b> |
| <b>6.6 On-Chip Power Regulator .....</b>     | <b>24</b> |
| <b>CHAPTER 7 PACKAGE DIMENSION .....</b>     | <b>25</b> |
| <b>CHAPTER 8 ORDERING INFORMATION.....</b>   | <b>26</b> |

## List of Figures

|                                                               |           |
|---------------------------------------------------------------|-----------|
| <b>Figure 3.1 - GL857L SSOP 28 Pin Pin-out Diagram .....</b>  | <b>10</b> |
| <b>Figure 4.1- GL857L Block Diagram.....</b>                  | <b>14</b> |
| <b>Figure 5.1 - Operating in USB 1.1 Scheme .....</b>         | <b>16</b> |
| <b>Figure 5.2 - Operating in USB 2.0 Scheme .....</b>         | <b>17</b> |
| <b>Figure 5.3 - Power on Reset Diagram.....</b>               | <b>19</b> |
| <b>Figure 5.4 - Power on Sequence of GL857L .....</b>         | <b>19</b> |
| <b>Figure 6.1 - Vin(V5) vs Vout(V33)* .....</b>               | <b>24</b> |
| <b>Figure 7.1 - GL857L 28 Pin SSOP Package (150 mil).....</b> | <b>25</b> |

## List of Tables

|                                                                             |           |
|-----------------------------------------------------------------------------|-----------|
| <b>Table 3.1 - GL857L SSOP 28 Pin List.....</b>                             | <b>11</b> |
| <b>Table 3.2 - Pin Descriptions.....</b>                                    | <b>11</b> |
| <b>Table 5.1 - Reset Timing .....</b>                                       | <b>20</b> |
| <b>Table 5.2 - Port Number Configuration.....</b>                           | <b>20</b> |
| <b>Table 6.1 - Maximum Ratings .....</b>                                    | <b>21</b> |
| <b>Table 6.2 - Operating Ranges.....</b>                                    | <b>21</b> |
| <b>Table 6.3 - SD/MMC Card Clock Frequency .....</b>                        | <b>21</b> |
| <b>Table 6.4 - DC Characteristics except USB Signals .....</b>              | <b>22</b> |
| <b>Table 6.5 - DC Characteristics of USB Signals under FS/LS Mode .....</b> | <b>22</b> |
| <b>Table 6.6 - DC Characteristics of USB Signals under HS Mode .....</b>    | <b>22</b> |
| <b>Table 6.7 - GL857L power consumption.....</b>                            | <b>23</b> |
| <b>Table 8.1 - Ordering Information .....</b>                               | <b>26</b> |

## CHAPTER 1 GENERAL DESCRIPTION

GL857L is Genesys Logic's combo solution for USB2.0 hub (with 3 downstream ports) and SD card reader in single chip SSOP28 package. It is fully compliant with Universal Serial Bus Specification Revision 2.0, USB Storage Class Specification ver.1.0 and supports Secure Digital™ v1.0 / v1.1 / v2.0/ SDHC / SDXC (capacity up to 2TB). GL857L inherits Genesys Logic's cutting edge technology on cost and power efficient serial interface design. GL857L has proven compatibility, lower power consumption figure, and better cost structure above all USB2.0 hub-reader solutions worldwide.

GL857L provides multiple advantages to simplify board level design that helps achieve lowest BOM (Bill of Material) for system integrator by integrating both 5V to 3.3V with power MOSFETs and 3.3V to 1.8V low dropout voltage regulator into single chip, therefore no external LDO required. Also, it enables the function of on-chip clock source (OCCS) which indicates that no external 12MHz XTAL is needed.

GL857L embeds an 8-bit RISC processor to manipulate the control/status registers and respond to the requests from USB host. Another one high speed 8051 microprocessor and a high efficiency hardware engine are also embedded for the best data transfer performance between USB and flash card interfaces.

## CHAPTER 2 FEATURES

### 2.1 General

- 3 downstream ports of USB2.0 Hub with SD Card Reader
- Integrated USB transceiver
- Built-in upstream 1.5K $\Omega$  pull-up and downstream 15K $\Omega$  pull-down
- Integrated 5-to-3.3 regulator and 3.3-to-1.8 regulator
- 0.152 $\mu$ m CMOS technology
- On chip clock source and no external crystal needed.

### 2.2 USB 2.0 3-port Hub

- Compliant to USB specification Revision 2.0
  - ◆ Configurable 3/2/1 downstream ports
  - ◆ upstream port supports both high speed(HS) and full speed(FS) traffic
  - ◆ downstream ports support HS, FS, and low speed(LS) traffic
  - ◆ 1 control pipe(endpoint 0, 64-byte data payload) and 1 interrupt pipe(endpoint 1, 1-byte data payload)
  - ◆ backward compatible to USB specification Revision 1.1
- Support gang modes of power management and over-current detection for downstream ports.
- On-chip 8-bit micro-processor
  - ◆ RISC-like architecture
  - ◆ USB optimized instruction set
  - ◆ Single cycle instruction execution
  - ◆ Performance: 6 MIPS @ 12MHz
  - ◆ With 64-byte RAM and 2K mask ROM

### 2.3 SD2.0 Card Reader

- USB specification compliance
  - ◆ Comply with 480Mbps Universal Serial Bus specification rev. 2.0
  - ◆ Comply with USB Storage Class specification rev. 1.0
  - ◆ Support one device address and up to four endpoints: Control (0)/ Bulk Read (1)/ Bulk Write (2)/Interrupt(3)
- Secure Digital™ (SD) and MultiMediaCard™ (MMC)
  - ◆ Supports SD specification v1.0 / v1.1 / v2.0 / SDHC (Up to 32GB)
  - ◆ Compatible with SDXC (Up to 2TB)
  - ◆ Supports MMC specification v3.x / v4.0 / v4.1 / v4.2
  - ◆ x1 / x4 bit data bus
- Support SD3.0 by 80MHz for better performance
- Embedded PMOS switch for power control of card interface

### 2.4 Available Packages

- SSOP-28 (150mil)

## CHAPTER 3 PIN ASSIGNMENT

### 3.1 Pinouts



Figure 3.1 - GL857L SSOP 28 Pin Pin-out Diagram

### 3.2 Pin List

Table 3.1 - GL857L SSOP 28 Pin List

| Pin# | Pin Name | Type | Pin# | Pin Name | Type | Pin# | Pin Name | Type | Pin# | Pin Name | Type |
|------|----------|------|------|----------|------|------|----------|------|------|----------|------|
| 1    | RESETJ   | I_5V | 8    | AVDD     | P    | 15   | V33      | P    | 22   | SD_D0    | B,pu |
| 2    | GND      | P    | 9    | DM3      | B    | 16   | V5       | P    | 23   | SD_CLK   | O    |
| 3    | AVDD     | P    | 10   | DP3      | B    | 17   | PMOS     | A    | 24   | DVDD     | P    |
| 4    | DM0      | B    | 11   | RREF     | A    | 18   | GPIO4    | O    | 25   | SD_CMD   | B,pu |
| 5    | DP0      | B    | 12   | AVDD1    | P    | 19   | SD_WPZ   | I,pu | 26   | SD_D3    | B,pu |
| 6    | DM2      | B    | 13   | DM4      | B    | 20   | SD_CDZ   | I,pu | 27   | SD_D2    | B,pu |
| 7    | DP2      | B    | 14   | DP4      | B    | 21   | SD_D1    | B,pu | 28   | OCVUR1J  | I_5V |

Table 3.2 - Pin Descriptions

| USB Interface |             |          |                                                                         |
|---------------|-------------|----------|-------------------------------------------------------------------------|
| Pin Name      | GL857L      | I/O Type | Description                                                             |
|               | SSOP 28 Pin |          |                                                                         |
| DM0,DP0       | 4,5         | B        | USB signals for USPORT                                                  |
| DM2,DP2       | 6,7         | B        | USB signals for DSPORT1                                                 |
| DM3,DP3       | 9,10        | B        | USB signals for DSPORT2                                                 |
| DM4,DP4       | 13,14       | B        | USB signals for DSPORT3                                                 |
| RREF          | 11          | A        | A 680Ω resistor must be connected between RREF and analog ground (AGND) |

Note: USB signals must be carefully handled in PCB routing. For detailed information, please refer to **USB 2.0 Hub Design Guide**.

| Hub/Reset Interface |             |          |                                                                                                                                                           |
|---------------------|-------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pin Name            | GL857L      | I/O Type | Description                                                                                                                                               |
|                     | SSOP 28 Pin |          |                                                                                                                                                           |
| OVCUR1J             | 28          | I_5V     | Active low. Over current indicator for DSPORT1~3.<br>*Over current flag On when OVCUR= low over 3ms.<br>OVCUR1J the only over current flag for GANG mode. |
| RESETJ              | 1           | I_5V     | Active low. External reset input, default pull high 10KΩ<br>When RESETJ = low, whole chip is reset to the initial state                                   |

| Reader Interface |             |          |                                |
|------------------|-------------|----------|--------------------------------|
| Pin Name         | GL857L      | I/O Type | Description                    |
|                  | SSOP 28 Pin |          |                                |
| SD_WPZ           | 19          | I, pu    | SD Write Protect, active low   |
| SD_CDZ           | 20          | I, pu    | SD Card Detect, active low     |
| SD_D[3:0]        | 26,27,21,22 | B, pu    | SD Data signals                |
| SD_CLK           | 23          | O        | SD Clock signal                |
| SD_CMD           | 25          | B, pu    | SD Command signal              |
| GPIO4            | 18          | O        | Card Reader Power & Access LED |

| Power / Ground |             |          |                                                           |
|----------------|-------------|----------|-----------------------------------------------------------|
| Pin Name       | GL857L      | I/O Type | Description                                               |
|                | SSOP 28 Pin |          |                                                           |
| AVDD           | 3,8         | P        | 3.3V analog power input for analog circuits               |
| AVDD1          | 12          | P        | 3.3V analog power input for analog PLL circuits           |
| DVDD           | 24          | P        | 3.3V digital power input for digital circuits             |
| GND            | 2           | P        | Ground<br>Exposed pad is connected to GND                 |
| V5             | 16          | P        | 5V Power input. It need be NC if using external regulator |
| V33            | 15          | P        | 5V-to-3.3V regulator Vout & 3.3 input                     |
| PMOS           | 17          | A        | PMOS 3.3V output to SD Card (current capacity 200mA)      |

Note: Analog circuits are quite sensitive to power and ground noise. PCB layout must takes care the power routing and the ground plane. For detailed information, please refer to **USB 2.0 Hub Design Guide**.

**Notation:**

|             |             |                                    |
|-------------|-------------|------------------------------------|
| <b>Type</b> | <b>O</b>    | Output                             |
|             | <b>I</b>    | Input                              |
|             | <b>I_5V</b> | 5V tolerant input                  |
|             | <b>B</b>    | Bi-directional                     |
|             | <b>B/I</b>  | Bi-directional, default input      |
|             | <b>B/O</b>  | Bi-directional, default output     |
|             | <b>P</b>    | Power / Ground                     |
|             | <b>A</b>    | Analog                             |
|             | <b>SO</b>   | Automatic output low when suspend  |
|             | <b>pu</b>   | Internal pull high                 |
|             | <b>pd</b>   | Internal pull down                 |
|             | <b>odpu</b> | Open drain with internal pull high |

## CHAPTER 4 BLOCK DIAGRAM

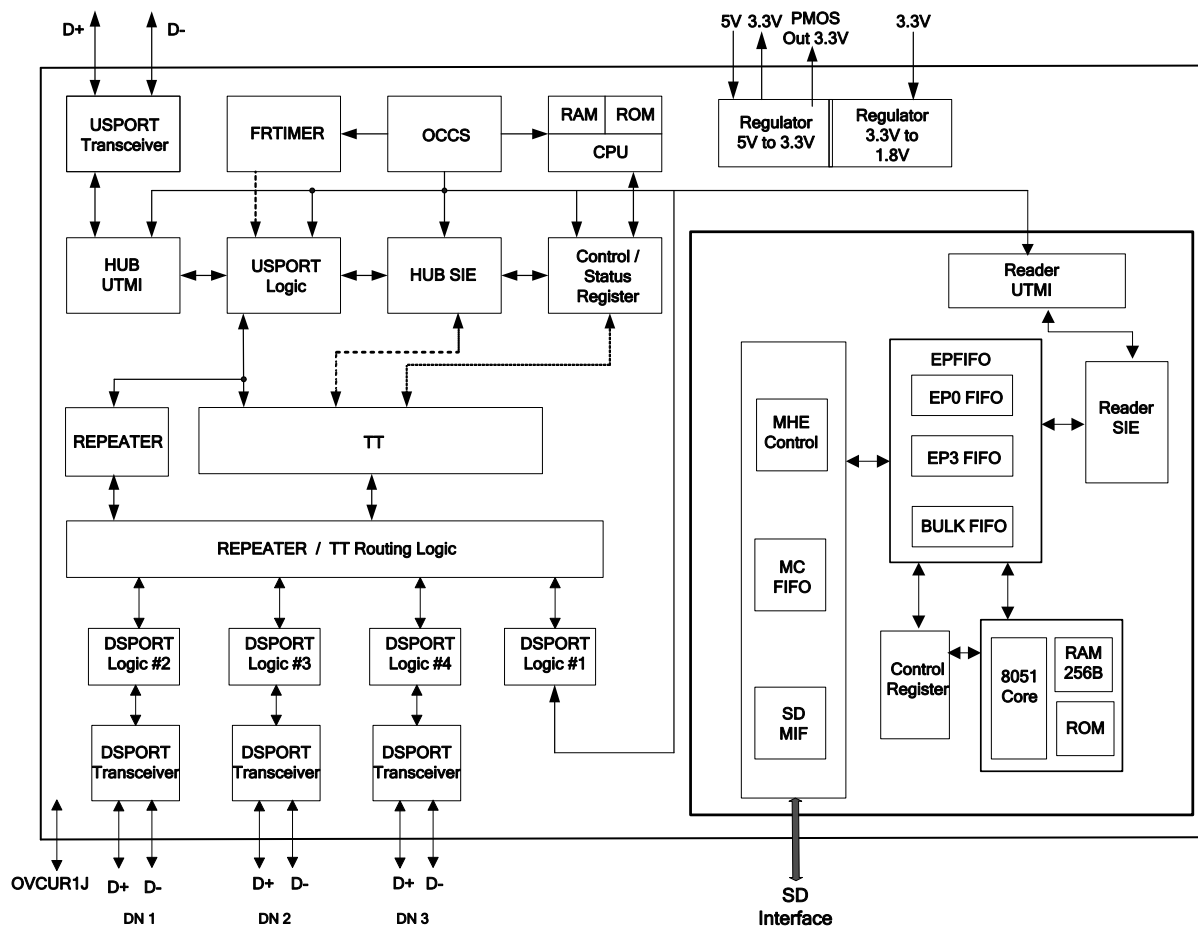


Figure 4.1- GL857L Block Diagram

## CHAPTER 5 FUNCTION DESCRIPTION

### 5.1 General Description

#### 5.1.1 USPORT Transceiver

USPORT (upstream port) transceiver is the analog circuit that supports both full-speed and high-speed electrical characteristics defined in chapter 7 of *USB specification Revision 2.0*. USPORT transceiver will operate in full-speed electrical signaling when GL857L is plugged into a 1.1 host/hub. USPORT transceiver will operate in high-speed electrical signaling when GL857L is plugged into a 2.0 host/hub.

#### 5.1.2 FRTIMER

This module implements hub (micro) frame timer. The (micro) frame timer is derived from the hub's local clock and is synchronized to the host (micro) frame period by the host generated Start of (micro) frame (SOF). FRTIMER keeps tracking the host's SOF such that GL857L is always safely synchronized to the host. The functionality of FRTIMER is described in section 11.2 of *USB Specification Revision 2.0*.

#### 5.1.3 OCCS USB PHY

The USB 2.0 Transceiver Macrocell is the analog circuitry that handles the low level USB protocol and signaling and shifts the clock domain of the data from the USB 2.0 rate to one that is compatible with the general logic. On chip clock source and no need of 12MHz Crystal Clock input.

#### 5.1.4 $\mu$ C

$\mu$ C is the micro-processor unit of GL857L. It is an 8-bit RISC processor with 2K ROM and 64 bytes RAM. It operates at 6MIPS of 12MHz clock to decode the USB command issued from host and then prepares the data to respond to the host. In addition,  $\mu$ C can handle GPIO (general purpose I/O) settings and reading content of EEPROM to support high flexibility for customers of different configurations of hub. These configurations include self/bus power mode setting, individual/gang mode setting, downstream port number setting, device removable/non-removable setting, port electrical tuning and PID/VID setting.

#### 5.1.5 UTMI (USB 2.0 Transceiver Microcell Interface)

UTMI handles the low level USB protocol and signaling. It's designed based on the Intel's UTMI specification 1.01. The major functions of UTMI logic are to handle the data and clock recovery, NRZI encoding/decoding, Bit stuffing /de-stuffing, supporting USB 2.0 test modes, and serial/parallel conversion.

#### 5.1.6 USPORT Logic

USPORT implements the upstream port logic defined in section 11.6 of *USB specification Revision 2.0*. It mainly manipulates traffics in the upstream direction. The main functions include the state machines of Receiver and Transmitter, interfaces between UTMI and SIE, and traffic control to/from the REPEATER and TT.

#### 5.1.7 SIE (Serial Interface Engine)

SIE handles the USB protocol defined in chapter 8 of *USB specification Revision 2.0*. It co-works with  $\mu$ C to play the role of the hub kernel. The main functions of SIE include the state machine of USB protocol flow, CRC check, PID error check, and timeout check. Unlike USB 1.1, bit stuffing/de-stuffing is implemented in UTMI, not in SIE.

### 5.1.8 Control/Status Register

Control/Status register is the interface register between hardware and firmware. This register contains the information necessary to control endpoint0 and endpoint1 pipes. Through the firmware based architecture, GL857L possesses higher flexibility to control the USB protocol easily and correctly.

### 5.1.9 REPEATER

Repeater logic implements the control logic defined in section 11.4 and section 11.7 of *USB specification Revision 2.0*. REPEATER controls the traffic flow when upstream port and downstream port are signaling in the same speed. In addition, REPEATER will generate internal resume signal whenever a wakeup event is issued under the situation that hub is globally suspended.

### 5.1.10 TT (Transaction Translator)

TT implements the control logic defined in section 11.14 ~ 11.22 of *USB specification Revision 2.0*. TT basically handles the unbalanced traffic speed between the USPORT (operating in HS) and DSPORTS (operating in FS/LS) of hub. GL857L adopts the single TT architecture to provide the most cost effective solution.

### 5.1.11 REPEATER/TT Routing Logic

REPEATER and TT are the major traffic control machines in the USB 2.0 hub. Under situation that USPORT and DSPORT are signaling in the same speed, REPEATER/TT routing logic switches the traffic channel to the REPEATER. Under situation that USPORT is in the high speed signaling and DSPORT is in the full/low speed signaling, REPEATER/TT routing logic switches the traffic channel to the TT.

#### 5.1.11.1 Connected to USB 1.1 Host/Hub

If an USB 2.0 hub is connected to the downstream port of an USB 1.1 host/hub, it will operate in USB 1.1 mode. For an USB 1.1 hub, both upstream direction traffic and downstream direction traffic are passing through REPEATER. That is, the REPEATER/TT routing logic will route the traffic channel to the REPEATER.

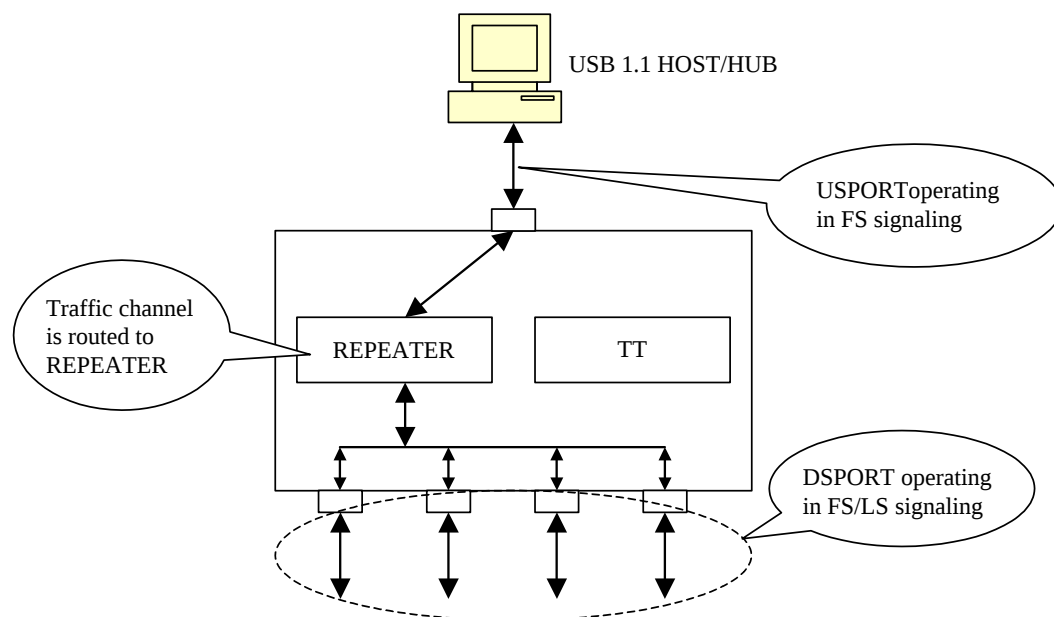


Figure 5.1 - Operating in USB 1.1 Scheme

### 5.1.11.2 Connected to USB 2.0 Host/Hub

If an USB 2.0 hub is connected to an USB 2.0 host/hub, it will operate in USB 2.0 mode. The upstream port signaling is in high speed with bandwidth of 480 Mbps under this environment. The traffic channel will then be routed to the REPEATER when the device connected to the downstream port is signaling also in high speed. On the other hand, the traffic channel will then be routed to TT when the device connected to the downstream port is signaling in full/low speed.

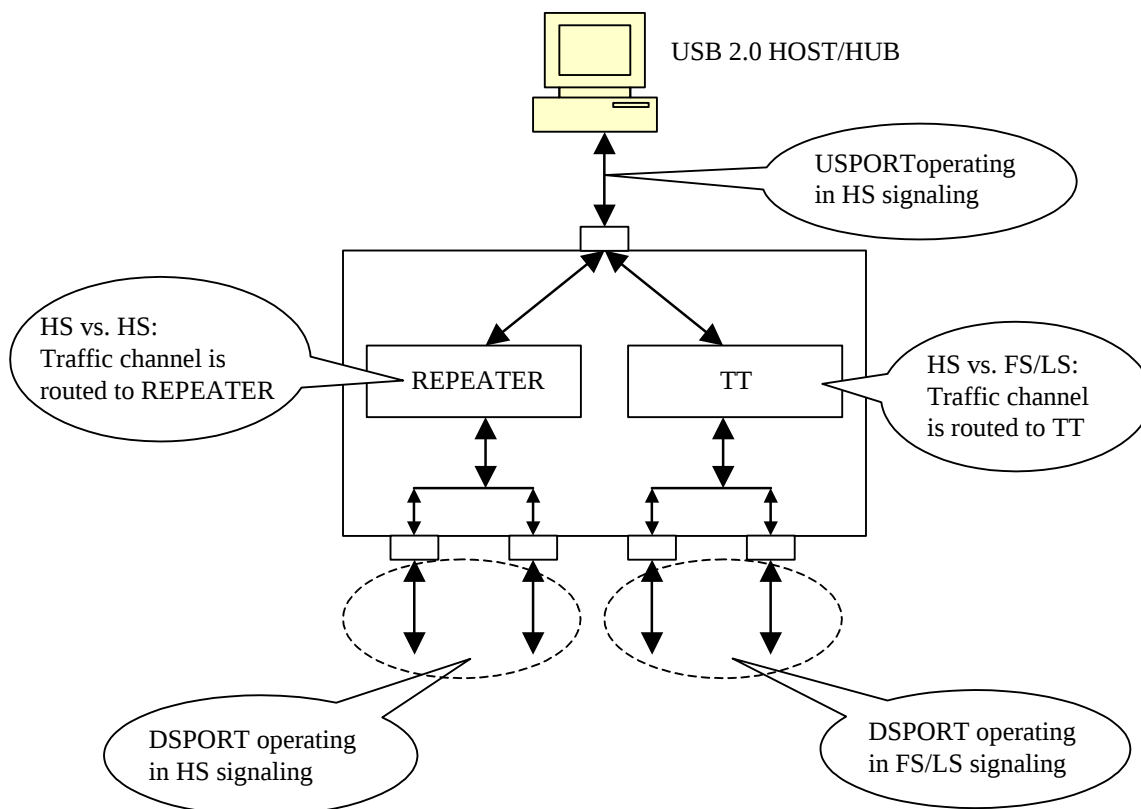


Figure 5.2 - Operating in USB 2.0 Scheme

### 5.1.12 DSPORT Logic

DSPORT (downstream port) logic implements the control logic defined in section 11.5 of *USB specification Revision 2.0*. It mainly manipulates the state machine, the connection/disconnection detection, over current detection and power enable control. Besides, it also output the control signals to the DSPORT transceiver.

### 5.1.13 DSPORT Transceiver

DSPORT transceiver is the analog circuit that supports high-speed, full-speed, and low-speed electrical characteristics defined in chapter 7 of *USB specification Revision 2.0*. In addition, each DSPORT transceiver accurately controls its own squelch level to detect the detachment and attachment of devices.

#### 5.1.14 Regulator

GLI857L builds in two internal regulators as.

- **5V to 3.3V:** Band Gap Regulator for stable voltage supply for USB PHY, PMOS.  
When Power source is 3.3V, the 5V to 3.3V regulator will be disabled.
- **3.3V to 1.8V:** For core logic and internal memory.

#### 5.1.15 EP0 FIFO for Card Reader

Endpoint 0 FIFO: The Control FIFO. It is composed of TX0FIFO and RX0FIFO, with 64-byte FIFO each, and it is used for endpoint 0 data transfer.

#### 5.1.16 Bulk FIFO for Card Reader

It is composed of TXFIFO and RXFIFO for data transmission and receiving respectively, also with different modes support:

##### 5.1.16.1 TXFIFO

- Supports MCU single byte access for SmartMedia ECC error correction.
- Supports transmit mode SIE won't transmit data filled in TXFIFO before MCU complete the data integrity checking.

##### 5.1.16.2 RXFIFO

- Normally SME pops data, SIE pushes data for DATA A/B FIFOs, and redundant area is pushed by MCU and popped by SME.

#### 5.1.17 MHE (Media Interface) for Card Reader

**MIF** Media Interface: SD

**MCFIFO** It can access by MCU for memory card short data packet.


#### 5.1.18 8051/MCU

The 8051/MCU is a super fast microprocessor . It includes 16K-byte ROM, 256-byte main memory SRAM. The frequency is 60 MHz at USB 2.0

## 5.2 Configuration and I/O Settings


### 5.2.1 RESET Setting

GL857L's power on reset can either be triggered by external reset or internal power good reset circuit. The external reset pin, RESETJ, is connected to upstream port Vbus (5V) to sense the USB plug / unplug or 5V voltage drop. The reset trigger voltage can be set by adjusting the value of resistor R1 and R2 (Suggested value refers to schematics) GL857L's internal reset is designed to monitor silicon's internal core power (3.3V) and initiate reset when unstable power event occurs. The power on sequence will start after the power good voltage has been met, and the reset will be released after approximately 2.7  $\mu$ s after power good.

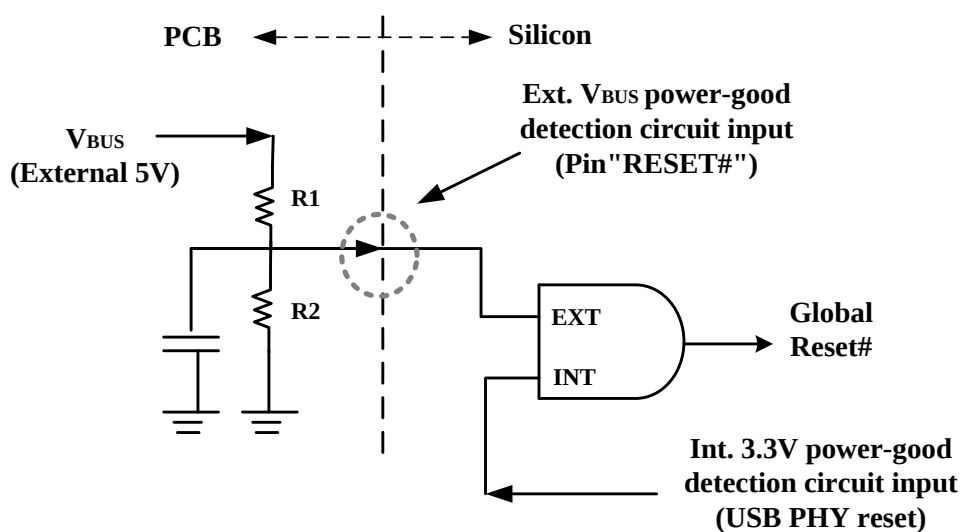

GL857L internally contains a power on reset circuit as depicted in the picture above

**Figure 5.3 - Power on Reset Diagram**

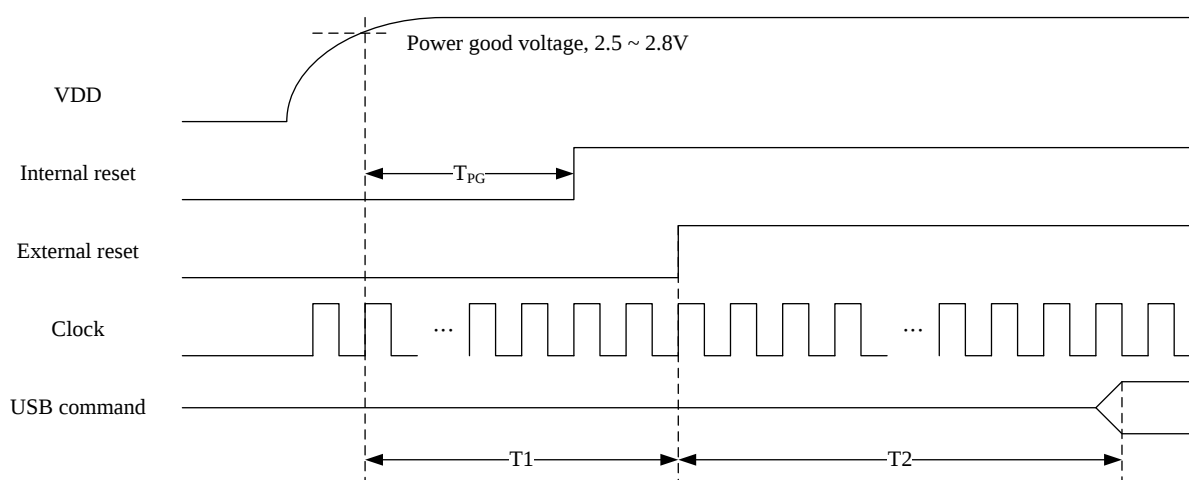

**Figure 5.4 - Power on Sequence of GL857L**

**Table 5.1 - Reset Timing**

| Symbol          | Parameter                                                  | Min. | Max. | Unit |
|-----------------|------------------------------------------------------------|------|------|------|
| T <sub>PG</sub> | VDD power up to internal reset (power good) assert (12MHz) | -    | 2.7  | μs   |
| T1              | VDD power up to external reset (RESETJ) assert             | 3    | -    | μs   |
| T2              | RESET assert to respond USB command ready                  | 70   | -    | ms   |

To fully control the reset process of GL857L, we suggest the reset time applied in the external reset circuit should longer than that of the internal reset circuit.

### 5.2.2 Port Number Configuration

Number of downstream port can be configured by I/O Strapping. When DP and DM of a specific downstream port are pulled high externally with 1K resistor to 3.3V, the downstream port is disabled. Please refer to the following table for detailed setting information.

**Table 5.2 - Port Number Configuration**

| Remaining Port Number | I/O Strapping      |
|-----------------------|--------------------|
| 1                     | DP3, DM3 Pull high |
| 2                     | DP4, DM4 Pull high |

## CHAPTER 6 ELECTRICAL CHARACTERISTICS

### 6.1 Maximum Ratings

**Table 6.1 - Maximum Ratings**

| Symbol             | Parameter                                    | Min.           | Max. | Unit |
|--------------------|----------------------------------------------|----------------|------|------|
| V <sub>5</sub>     | 5V Power Supply                              | -0.5           | +6.0 | V    |
| V <sub>DD</sub>    | 3.3V Power Supply                            | -0.5           | +3.6 | V    |
| V <sub>IN</sub>    | Input Voltage for digital I/O pins           | -0.5           | +3.6 | V    |
| V <sub>INOD</sub>  | Open-drain input pins(Ovcur1~4#,Pself,Reset) | -0.5           | +5.5 | V    |
| V <sub>INUSB</sub> | Input Voltage for USB signal (DP, DM) pins   | -0.5           | +3.6 | V    |
| T <sub>S</sub>     | Storage Temperature under bias               | -55            | +100 | °C   |
|                    | Operating Temperature                        | 0              | +70  | °C   |
| F <sub>OSC</sub>   | Frequency                                    | 12 MHz ± 0.05% |      |      |

### 6.2 Operating Ranges

**Table 6.2 - Operating Ranges**

| Symbol             | Parameter                                    | Min. | Typ.  | Max. | Unit |
|--------------------|----------------------------------------------|------|-------|------|------|
| V <sub>5</sub>     | 5V Power Supply                              | 4.75 | 5.0   | 5.25 | V    |
| V <sub>DD</sub>    | 3.3V Power Supply                            | 3.0  | 3.3   | 3.6  | V    |
| V <sub>IN</sub>    | Input Voltage for digital I/O pins           | -0.5 | -     | 3.6  | V    |
| V <sub>INOD</sub>  | Open-drain input pins(Ovcur1~4#,Pself,Reset) | -0.5 | -     | 5.0  | V    |
| V <sub>INUSB</sub> | Input Voltage for USB signal (DP, DM) pins   | 0.5  | -     | 3.6  | V    |
| T <sub>A</sub>     | Ambient Temperature                          | 0    | -     | 70   | °C   |
| T <sub>J</sub>     | Absolute maximum junction temperature        | 0    | -     | 125  | °C   |
| θ <sub>JA</sub>    | Thermal Characteristics 28 SSOP              | -    | 65.65 | -    | °C/W |

### 6.3 Memory Card Clock Frequency

**Table 6.3 - SD/MMC Card Clock Frequency**

| Parameter        | Description                                     | Min. | Typ. | Max. | Unit |
|------------------|-------------------------------------------------|------|------|------|------|
| F <sub>ID</sub>  | Clock frequency Identification Mode             | -    | -    | 375  | KHz  |
| F <sub>DS</sub>  | Clock frequency Default Speed Mode              | -    | -    | 24   | MHz  |
| F <sub>HS</sub>  | Clock frequency High Speed Mode                 | -    | -    | 48   | MHz  |
| F <sub>UHS</sub> | Clock frequency Ultra High Speed Mode (SD only) | -    | -    | 80   | MHz  |

## 6.4 DC Characteristics

**Table 6.4 - DC Characteristics except USB Signals**

| Symbol    | Parameter                                   | Min. | Typ. | Max. | Unit       |
|-----------|---------------------------------------------|------|------|------|------------|
| $V_{IL}$  | LOW level input voltage                     | -    | -    | 0.8  | V          |
| $V_{IH}$  | HIGH level input voltage                    | 2.0  | -    | -    | V          |
| $V_{TLH}$ | LOW to HIGH threshold voltage               | 1.48 | 1.55 | 1.6  | V          |
| $V_{THL}$ | HIGH to LOW threshold voltage               | 1.13 | 1.21 | 1.27 | V          |
| $V_{OL}$  | LOW level output voltage when $I_{OL}=8mA$  | -    | -    | 0.4  | V          |
| $V_{OH}$  | HIGH level output voltage when $I_{OH}=8mA$ | 2.4  | -    | -    | V          |
| $R_{DN}$  | Pad internal pull down resister             | 230  | 275  | 565  | K $\Omega$ |
| $R_{UP}$  | Pad internal pull high resister             | 148  | 222  | 359  | K $\Omega$ |

**Table 6.5 - DC Characteristics of USB Signals under FS/LS Mode**

| Symbol    | Parameter                                           | Min. | Typ. | Max. | Unit     |
|-----------|-----------------------------------------------------|------|------|------|----------|
| $V_{OL}$  | DP/DM FS static output LOW( $R_L$ of 1.5K to 3.6V ) | 0    | -    | 0.3  | V        |
| $V_{OH}$  | DP/DM FS static output HIGH ( $R_L$ of 15K to GND ) | 2.8  | -    | 3.6  | V        |
| $V_{DI}$  | Differential input sensitivity                      | 0.2  | -    | -    | V        |
| $V_{CM}$  | Differential common mode range                      | 0.8  | -    | 2.5  | V        |
| $V_{SE}$  | Single-ended receiver threshold                     | 0.2  | -    | -    | V        |
| $C_{IN}$  | Transceiver capacitance                             | -    | -    | 20   | pf       |
| $I_{LO}$  | Hi-Z state data line leakage                        | -10  | -    | +10  | $\mu A$  |
| $Z_{DRV}$ | Driver output resistance                            | 28   | -    | 44   | $\Omega$ |

**Table 6.6 - DC Characteristics of USB Signals under HS Mode**

| Symbol    | Parameter                                           | Min. | Typ. | Max. | Unit     |
|-----------|-----------------------------------------------------|------|------|------|----------|
| $V_{OL}$  | DP/DM HS static output LOW( $R_L$ of 1.5K to 3.6V ) | -    | -    | 0.1  | V        |
| $C_{IN}$  | Transceiver capacitance                             | 4    | 4.5  | 5    | pf       |
| $I_{LO}$  | Hi-Z state data line leakage                        | -5   | 0    | +5   | $\mu A$  |
| $Z_{DRV}$ | Driver output resistance for USB 2.0 HS             | 42   | 45   | 48   | $\Omega$ |

## 6.5 Power Consumption

Table 6.7 - GL857L power consumption

| Symbol     | Condition             |         |                 |        | Current     | Unit |
|------------|-----------------------|---------|-----------------|--------|-------------|------|
|            | Active ports          | SD Card | Host            | Device |             |      |
| $I_{SUSP}$ | Suspend               |         |                 |        | <b>1.14</b> | mA   |
| $I_{CC}$   | 3                     | SD      | H <sup>*1</sup> | H      | <b>74.6</b> | mA   |
|            | 3                     | -       | H               | H      | <b>71.4</b> | mA   |
|            | 2                     | -       | H               | H      | <b>66.2</b> | mA   |
|            | 1                     | -       | H               | H      | <b>61.2</b> | mA   |
|            | -                     | SD      | H               | H      | <b>56.4</b> | mA   |
|            | Upstream Port Config. | -       | H               | N/A    | <b>53.1</b> | mA   |

\*1: H: High-Speed

Note:

Test result was measured by 5V input (it will be lower by 3.3V input), and represents silicon level operating current, without considering additional power consumption contributed by external over-current protection circuit such as power switch or polyfuse.

## 6.6 On-Chip Power Regulator

GL857L requires 3.3V source power for normal operation of internal core logic and USB physical layer (PHY). The integrated low-drop power regulator converts 5V power input from USB cable (Vbus) to 3.3V voltage for silicon power source. The 3.3V power output is guaranteed by an internal voltage reference circuit to prevent unstable 5V power compromise USB data integrity. The regulator's maximum current loading is 200mA, which provides enough tolerance for normal GL857L operation (below 100mA).

On-chip Power Regulator Features:

- 5V to 3.3V low-drop power regulator
- 400mA maximum output driving capability
- Provide stable 3.3V output when  $V_{in} = 4.4V \sim 5.5V$
- Max. suspend current: 266uA; typical suspend current 187uA

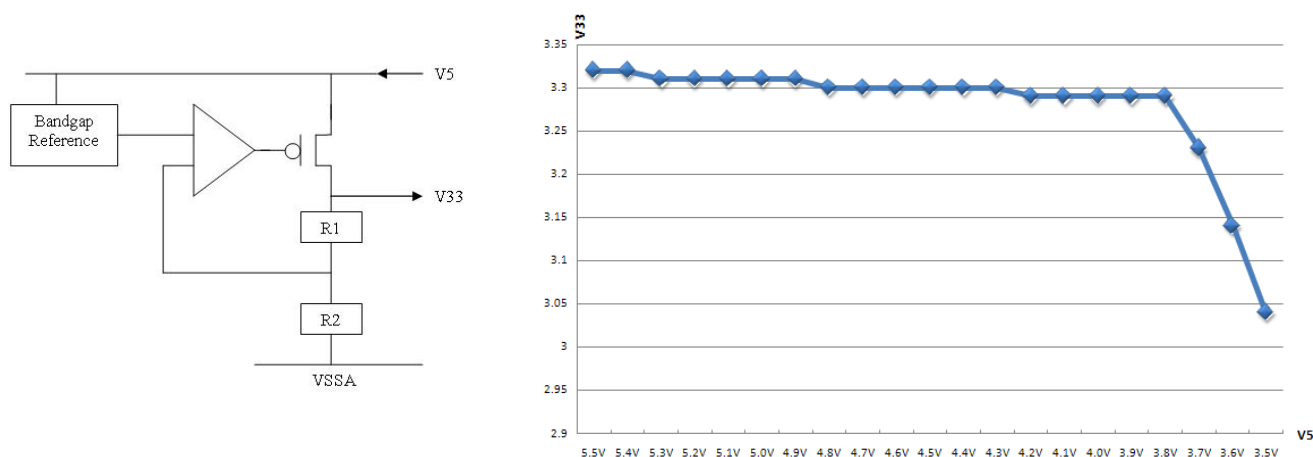


Figure 6.1 -  $V_{in}(V5)$  vs  $V_{out}(V33)^*$

\*Note: Measured environment: Ambient temperature = 25°C / Current Loading = 200mA

## CHAPTER 7 PACKAGE DIMENSION

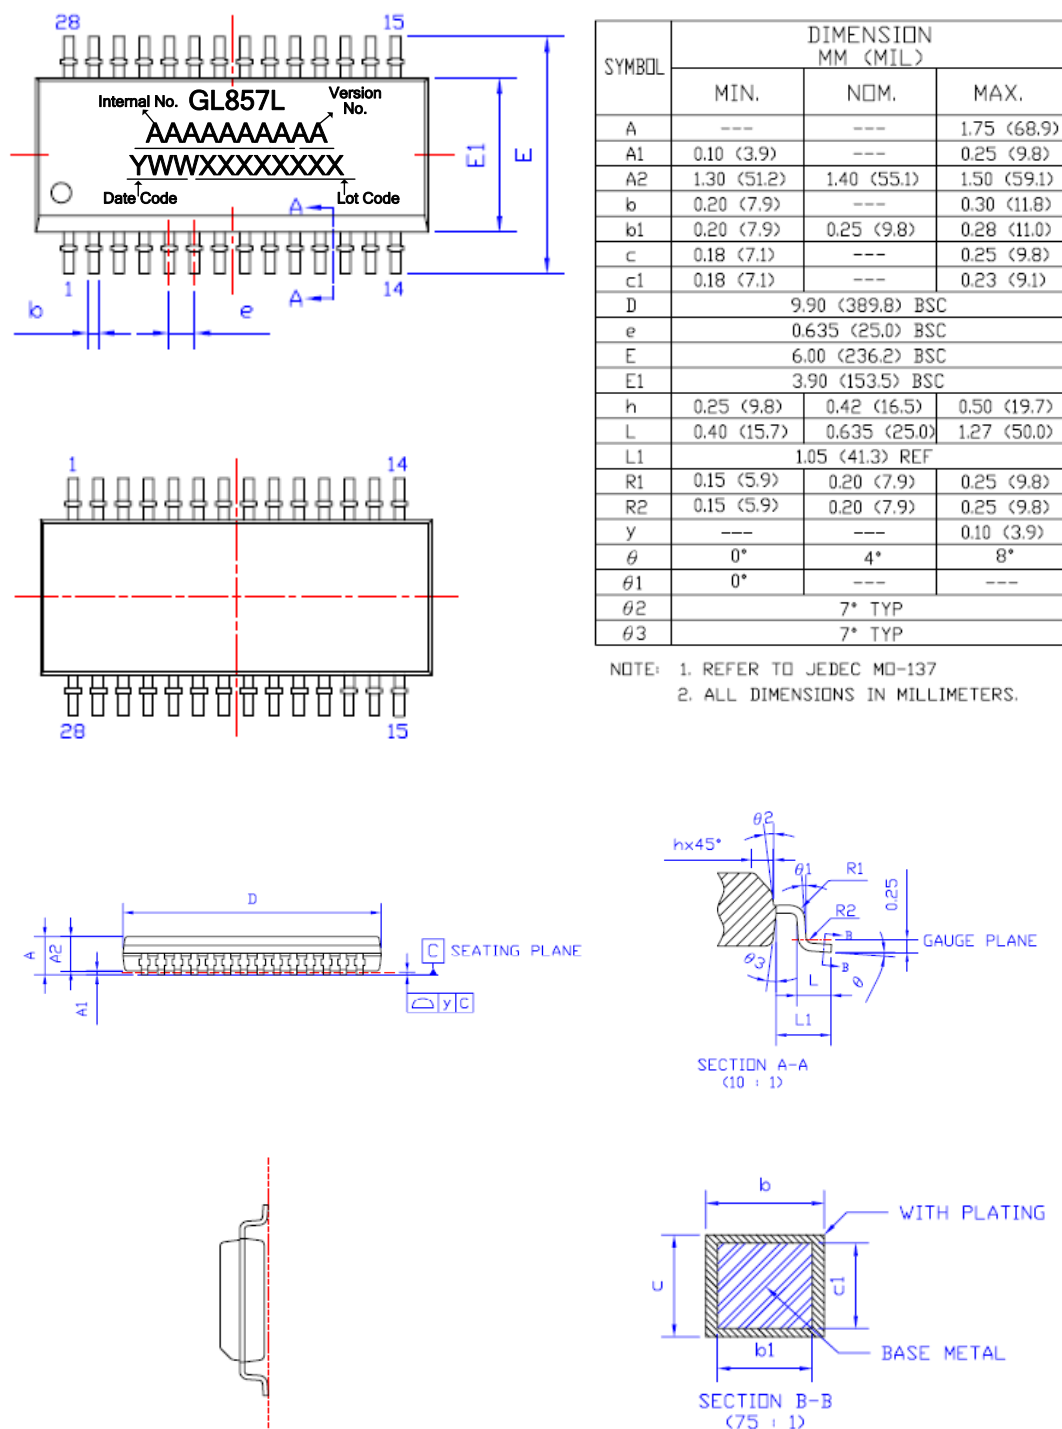


Figure 7.1 - GL857L 28 Pin SSOP Package (150 mil)

## CHAPTER 8 ORDERING INFORMATION

**Table 8.1 - Ordering Information**

| <b>Part Number</b> | <b>Package</b> | <b>Package Type</b> | <b>Version</b> | <b>Status</b> |
|--------------------|----------------|---------------------|----------------|---------------|
| GL857L-HHY10       | SSOP 28        | Green Package       | 10             | Available     |