

GLP12-174M
VHF US&EU Band

Inquir

Applocation

for Spurious reduction

Characteristics


GLP12-174M	
Zin/Zout	50 ohm Nominal
Pass Band	150 up to 174MHz
Insertion Loss	0.7dB max (150 up to 174MHz)
V.S.W.R	1.5 max (150 up to 174MHz)
Attenuation	25 dB min (at 2f : 300 up to 348MHz)
	20 dB min (at 3f : 450 up to 522MHz)
Rated Power	5W (150 up to 174MHz)
Max Input Power	7W 5minutes

Number of ordered pieces

1000pcs/Reel

Dimensions

Dimension (Unit : mm)

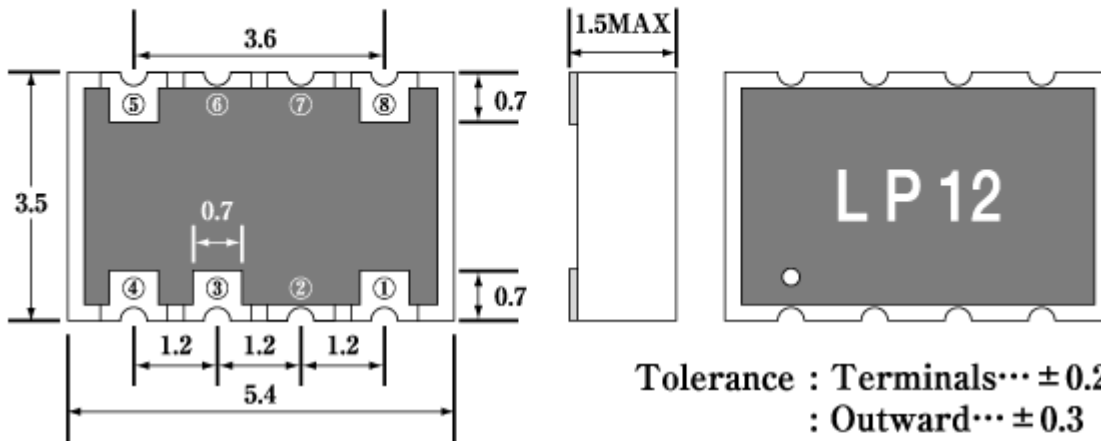

Tolerance : Terminals... ±0.2
: Outward... ±0.3

Terminal	
①	Input
③	GND
④	Output
⑤	GND
⑧	GND

Note

Do not connect any wiring (inclusive of grounding) to terminals No.2,6 and No.7. They are provided solely for internal connections.

Frequency Data

