

GLP9-450M

UHF Japan Band

Inquiry

Applocation

for Spurious reduction

Characteristics


GLP9-450M	
Zin/Zout	50 ohm Nominal
Pass Band	400 up to 450MHz
Insertion Loss	0.7dB max (400 up to 450MHz)
V.S.W.R	1.5 max (400 up to 450MHz)
Attenuation	30 dB min (at 2f : 800 up to 900MHz) 25 dB min (at 3f : 1200 up to 1350MHz)
Rated Power	5W (400 up to 450MHz)
Max Input Power	7W 5minutes

Number of ordered pieces

1000pcs/Reel

Dimensions

Dimension (Unit : mm)

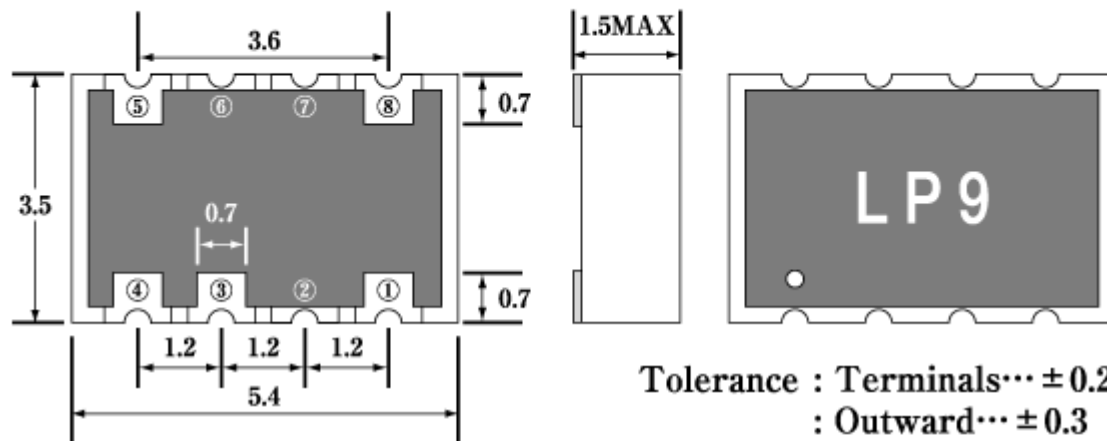

Terminal	
①	Input
③	GND
④	Output
⑤	GND
⑧	GND

Note

Do not connect any wiring (inclusive of grounding) to terminals No.2,6 and No.7. They are provided solely for internal connections.

Frequency Data

