






**0.7" 5×7
DOT MATRIX DISPLAYS**

**HER GMA 7175CA GMC 7175CA
YELLOW GMA 7475CA GMC 7475CA
GREEN GMA 7975CA GMC 7975CA**

PACKAGE DIMENSIONS

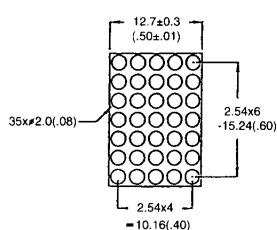

ST2623

NOTES:

1. ALL PINS ARE 0.05 (.02).
2. DIMENSION IN MILLIMETERS (INCH),
TOLERANCE IS 0.25 (.01) UNLESS
OTHERWISE NOTED.

DESCRIPTION

The GMX7X75CA series are 0.7" (17.2mm) matrix height 5 X 7 dot matrix displays. All these parts are available in grey face and white dot color.

The X in GMX denotes row anode or row cathode.

FEATURES

- 0.7" (17.8mm) matrix height
- Choice of 3 colors — green, yellow and HER
- Low power consumption
- 5 X 7 array with X-Y select
- Stackable vertically and horizontally
- Choice of 2 matrix orientation cathode column or anode column
- Easy mounting on PCB or sockets
- Categorized for luminous intensity

ABSOLUTE MAXIMUM RATING ($T_A=25^\circ\text{C}$ unless otherwise specified)

	YELLOW	HER	GREEN	UNITS
Power dissipation per dot	60	70	75	mW
Peak forward current per dot	80	100	100	mA
(Duty cycle 1/10, 10KHz)				
Continuous I_F per dot	20	25	25	mA
Reverse voltage per dot	5	5	5	V
Operating and operating temperature range				-25°C to $+85^\circ\text{C}$
Soldering time at 260°C (1/16 inch below seating plane)				3 sec




**0.7" 5×7
DOT MATRIX DISPLAYS**


ELECTRICAL/OPTICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ Unless otherwise specified)
GMX7175CA (HER)

PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Average luminous intensity	3000			μcd	$I_F=20 \text{ mA}$
Peak emission wavelength	635			nm	$I_F=20 \text{ mA}$
Spectral line half-width	40			nm	$I_F=20 \text{ mA}$
Forward voltage, any dot	2.1	2.8		V	$I_F=20 \text{ mA}$
Reverse voltage, any dot	100			μA	$V_R=5\text{V}$


TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES
($T_A=25^\circ\text{C}$ Unless otherwise specified)

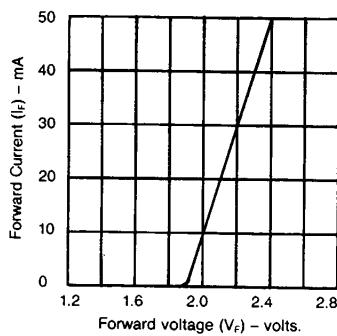

C3031

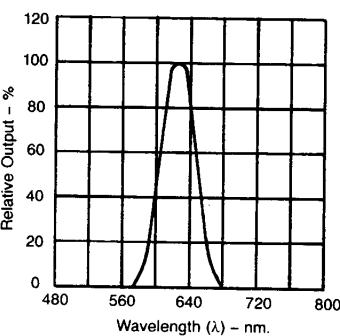

C3032

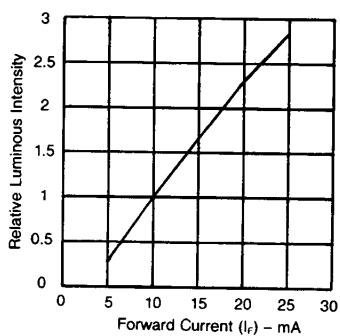


C3033

Fig. 1. Forward Current vs.
Forward Voltage


Fig. 2. Spectral Response

Fig. 3. Relative Luminous Intensity vs.
Forward Current (Per Segment)

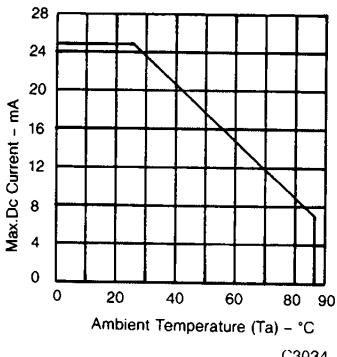


C3034

Fig. 4. Max. Forward Allowable
DC Current Per Seg. vs.
Ambient Temperature

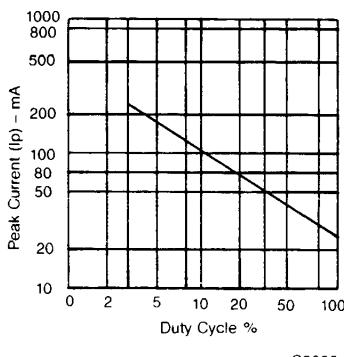

C3035

Fig. 5. Max. Peak Current vs.
Duty Circle %
(Refresh Rate - $F=1 \text{ KHz}$)

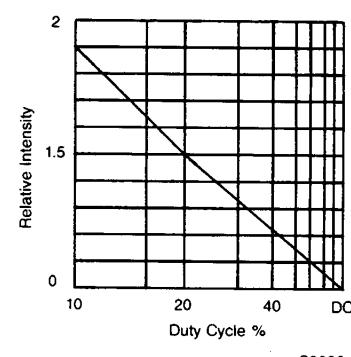

C3036

Fig. 6. Luminous Intensity vs.
Duty Cycle %
(Average $I=10 \text{ mA}$ Per Seg.)



**0.7" 5×7
DOT MATRIX DISPLAYS**

ELECTRICAL/OPTICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ Unless otherwise specified)
GMX 7475CA (YELLOW)

PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Average luminous intensity	3000			μcd	$I_F=20 \text{ mA}$
Peak emission wavelength	585			nm	$I_F=20 \text{ mA}$
Spectral line half-width	35			nm	$I_F=20 \text{ mA}$
Forward voltage, any dot	2.1	2.8		V	$I_F=20 \text{ mA}$
Reverse voltage, any dot	100			μA	$V_R=5\text{V}$

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES
($T_A=25^\circ\text{C}$ Unless Otherwise Noted)

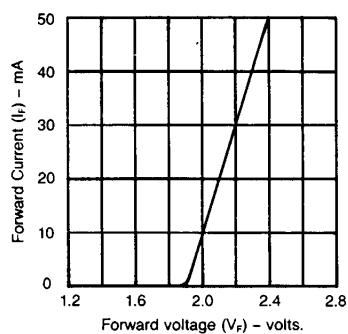


Fig. 1. Forward Current vs.
Forward Voltage

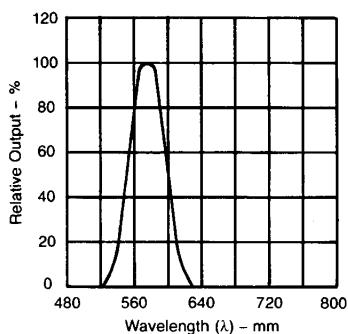


Fig. 2. Spectral Response

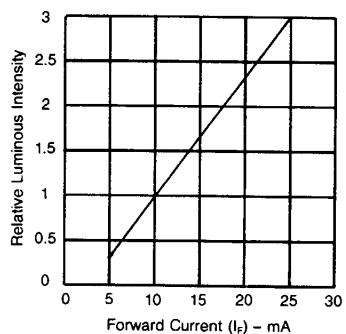


Fig. 3. Relative Luminous Intensity vs.
Forward Current (Per Segment)

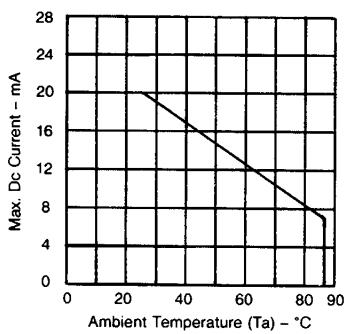


Fig. 4. Max. Forward Allowable
DC Current Per Seg. vs.
Ambient Temperature

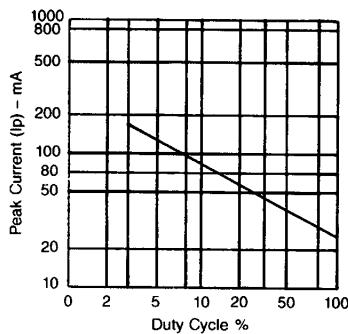


Fig. 5. Max. Peak Current vs.
Duty Circle %
(Refresh Rate - $F=1 \text{ KHz}$)

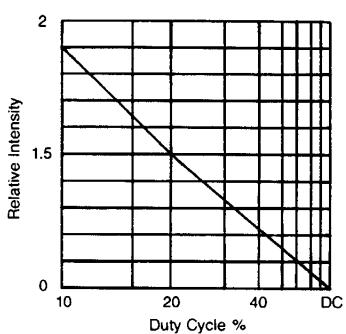


Fig. 6. Luminous Intensity vs.
Duty Cycle %
(Average $I_f=10 \text{ mA}$ Per Seg.)









**0.7" 5×7
DOT MATRIX DISPLAYS**

ELECTRICAL/OPTICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ Unless otherwise specified)
GMX 7975CA (GREEN)

PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Average luminous intensity	3000			μcd	$I_F=20 \text{ mA}$
Peak emission wavelength	565			nm	$I_F=20 \text{ mA}$
Spectral line half-width	30			nm	$I_F=20 \text{ mA}$
Forward voltage, any dot	2.1	2.8		V	$I_F=20 \text{ mA}$
Reverse voltage, any dot	100			μA	$V_R=5\text{V}$

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES
($T_A=25^\circ\text{C}$ Unless otherwise specified)

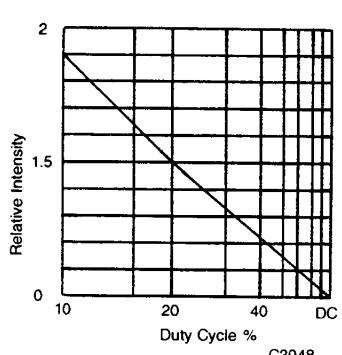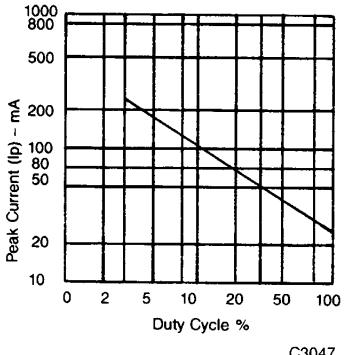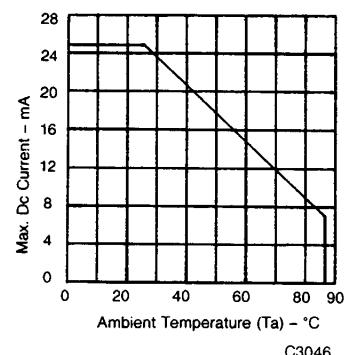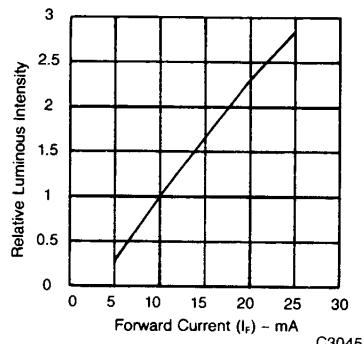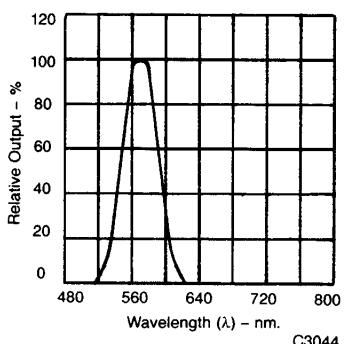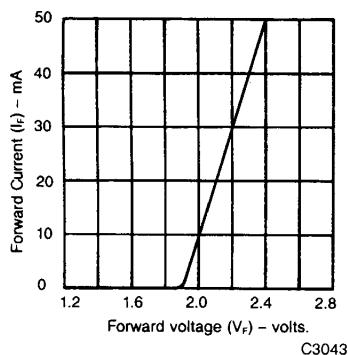



**0.7" 5×7
DOT MATRIX DISPLAYS**

PIN CONNECTION

PIN NO.	GMA7X75CA	GMC7X75CA
1	Cathode column 1	Anode column 1
2	Anode row 3	Cathode row 3
3	Cathode column 2	Anode column 2
4	Anode row 5	Cathode row 5
5	Anode row 6	Cathode row 6
6	Anode row 7	Cathode row 7
7	Cathode column 4	Anode column 4
8	Cathode column 5	Anode column 5
9	Anode row 4	Cathode row 4
10	Cathode column 3	Anode column 3
11	Anode row 2	Cathode row 2
12	Anode row 1	Cathode row 1

INTERNAL CIRCUIT DIAGRAM

