

GMZ2.0~GMZ56

SURFACE MOUNT ZENER DIODES

VOLTAGE 2 to 56 Volt **POWER** 500 mWatt



MICRO-MELF Unit : inch(mm)

FEATURES

- Planar Die construction
- 500mW Power Dissipation
- Ideally Suited for Automated Assembly Processes
- Lead free in compliance with EU RoHS2.0 (2011/65/EU & 2015/865/EU directive)

MECHANICAL DATA

- Case: Molded Glass MICRO-MELF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.01 grams.
- Polarity : Color band denotes cathode end
- Packing information
T/R - 2.5K per 7" plastic Reel

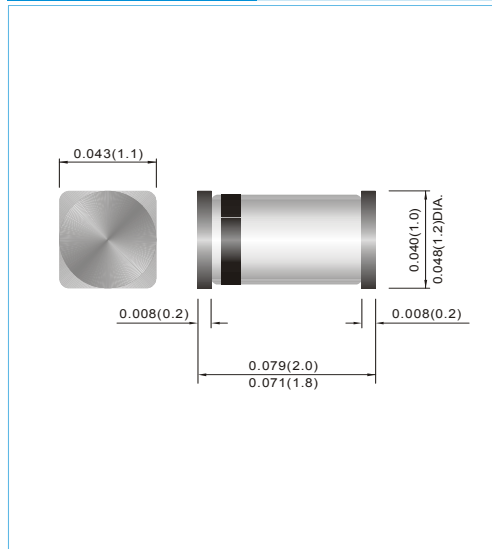

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Value	Units
Power Dissipation at $T_A = 25^\circ\text{C}$	P_{TOT}	500	mW
Operating Junction Temperature Range	T_J	175	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 to + 175	$^\circ\text{C}$
Valid provided that leads at a distance of 10mm from case are kept at ambient temperature.			

Parameter	Symbol	Min.	Typ.	Max.	Units
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	--	--	0.3	$^\circ\text{C}/\text{mW}$
Forward Voltage at $I_F = 100\text{mA}$	V_F	--	--	1	V
Valid provided that leads at a distance of 10mm from case are kept at ambient temperature.					

GMZ2.0~GMZ56



Part Number	Nominal Zener Voltage		Max. Zener Impedance				Max. Reverse Leakage Current	
	$V_Z @ I_{ZT}$		$Z_{ZT} @ I_{ZT}$		$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$	
	Min. V	Max. V	Ω	mA	Ω	mA	μA	V
GMZ 2.0A	1.88	2.1	140	20	2000	1	120	0.5
GMZ 2.0B	2.02	2.2	140	20	2000	1	120	0.5
GMZ 2.2A	2.12	2.3	120	20	2000	1	120	0.7
GMZ 2.2B	2.22	2.41	120	20	2000	1	120	0.7
GMZ 2.4A	2.33	2.52	100	20	2000	1	120	1
GMZ 2.4B	2.43	2.63	100	20	2000	1	120	1
GMZ 2.7A	2.54	2.75	100	20	1000	1	120	1
GMZ 2.7B	2.69	2.91	80	20	1000	1	120	1
GMZ 3.0A	2.85	3.07	80	20	1000	1	50	1
GMZ 3.0B	3.01	3.22	70	20	1000	1	50	1
GMZ 3.3A	3.16	3.38	70	20	1000	1	20	1
GMZ 3.3B	3.32	3.53	60	20	1000	1	20	1
GMZ 3.6A	3.46	3.69	60	20	1000	1	10	1
GMZ 3.6B	3.6	3.84	50	20	1000	1	10	1
GMZ 3.9A	3.74	4.01	50	20	1000	1	5	1
GMZ 3.9B	3.89	4.16	40	20	1000	1	5	1
GMZ 4.3A	4.04	4.29	40	20	1000	1	5	1
GMZ 4.3B	4.17	4.43	40	20	1000	1	5	1
GMZ 4.3C	4.3	4.57	25	20	1000	1	5	1
GMZ 4.7A	4.44	4.68	25	20	900	1	5	1
GMZ 4.7B	4.55	4.8	25	20	900	1	5	1
GMZ 4.7C	4.68	4.93	20	20	900	1	5	1
GMZ 5.1A	4.81	5.07	20	20	800	1	5	1.5
GMZ 5.1B	4.94	5.2	20	20	800	1	5	1.5
GMZ 5.1C	5.09	5.37	20	20	800	1	5	1.5
GMZ 5.6A	5.28	5.55	13	20	500	1	5	2.5
GMZ 5.6B	5.45	5.73	13	20	500	1	5	2.5
GMZ 5.6C	5.61	5.91	13	20	500	1	5	2.5
GMZ 6.2A	5.78	6.09	10	20	300	1	5	3
GMZ 6.2B	5.96	6.27	10	20	300	1	5	3
GMZ 6.2C	6.12	6.44	10	20	300	1	5	3
GMZ 6.8A	6.29	6.63	8	20	150	0.5	2	3.5
GMZ 6.8B	6.49	6.83	8	20	150	0.5	2	3.5
GMZ 6.8C	6.66	7.01	8	20	150	0.5	2	3.5
GMZ 7.5A	6.85	7.22	8	20	120	0.5	0.5	4
GMZ 7.5B	7.07	7.45	8	20	120	0.5	0.5	4
GMZ 7.5C	7.29	7.67	8	20	120	0.5	0.5	4
GMZ 8.2A	7.53	7.92	8	20	120	0.5	0.5	5
GMZ 8.2B	7.78	8.19	8	20	120	0.5	0.5	5
GMZ 8.2C	8.03	8.45	8	20	120	0.5	0.5	5
GMZ 9.1A	8.29	8.73	8	20	120	0.5	0.5	6
GMZ 9.1B	8.57	9.01	8	20	120	0.5	0.5	6
GMZ 9.1C	8.83	9.3	8	20	120	0.5	0.5	6
GMZ 10A	9.12	9.59	8	20	120	0.5	0.2	7
GMZ 10B	9.41	9.9	8	20	120	0.5	0.2	7
GMZ 10C	9.7	10.2	8	20	120	0.5	0.2	7
GMZ 10D	9.94	10.44	8	20	120	0.5	0.2	7
GMZ 11A	10.18	10.71	10	10	120	0.5	0.2	8
GMZ 11B	10.5	11.05	10	10	120	0.5	0.2	8
GMZ 11C	10.82	11.38	10	10	120	0.5	0.2	8

GMZ2.0~GMZ56

Part Number	Nominal Zener Voltage		Max. Zener Impedance				Max. Reverse Leakage Current	
	$V_Z @ I_{ZT}$		$Z_{ZT} @ I_{ZT}$		$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$	
	Min. V	Max. V	Ω	mA	Ω	mA	μA	V
GMZ 12A	11.13	11.71	12	10	110	0.5	0.2	9
GMZ 12B	11.44	12.03	12	10	110	0.5	0.2	9
GMZ 12C	11.74	12.35	12	10	110	0.5	0.2	9
GMZ 13A	12.11	12.75	14	10	110	0.5	0.2	10
GMZ 13B	12.55	13.21	14	10	110	0.5	0.2	10
GMZ 13C	12.99	13.66	14	10	110	0.5	0.2	10
GMZ 15A	13.44	14.13	16	10	110	0.5	0.2	11
GMZ 15B	13.89	14.62	16	10	110	0.5	0.2	11
GMZ 15C	14.35	15.09	16	10	110	0.5	0.2	11
GMZ 16A	14.8	15.57	18	10	150	0.5	0.2	12
GMZ 16B	15.25	16.04	18	10	150	0.5	0.2	12
GMZ 16C	15.69	16.51	18	10	150	0.5	0.2	12
GMZ 18A	16.22	17.06	23	10	150	0.5	0.2	13
GMZ 18B	16.82	17.7	23	10	150	0.5	0.2	13
GMZ 18C	17.42	18.33	23	10	150	0.5	0.2	13
GMZ 20A	18.02	18.96	28	10	200	0.5	0.2	15
GMZ 20B	18.63	19.59	28	10	200	0.5	0.2	15
GMZ 20C	19.23	20.22	28	10	200	0.5	0.2	15
GMZ 20D	19.72	20.72	28	10	200	0.5	0.2	15
GMZ 22A	20.15	21.2	30	5	200	0.5	0.2	17
GMZ 22B	20.64	21.71	30	5	200	0.5	0.2	17
GMZ 22C	21.08	22.17	30	5	200	0.5	0.2	17
GMZ 22D	21.52	22.63	30	5	200	0.5	0.2	17
GMZ 24A	22.05	23.18	35	5	200	0.5	0.2	19
GMZ 24B	22.61	23.77	35	5	200	0.5	0.2	19
GMZ 24C	23.12	24.31	35	5	200	0.5	0.2	19
GMZ 24D	23.63	24.85	35	5	200	0.5	0.2	19
GMZ 27A	24.26	25.52	45	5	250	0.5	0.2	21
GMZ 27B	24.97	26.26	45	5	250	0.5	0.2	21
GMZ 27C	25.63	26.95	45	5	250	0.5	0.2	21
GMZ 27D	26.29	27.64	45	5	250	0.5	0.2	21
GMZ 30A	26.99	28.39	55	5	250	0.5	0.2	23
GMZ 30B	27.7	29.13	55	5	250	0.5	0.2	23
GMZ 30C	28.36	29.82	55	5	250	0.5	0.2	23
GMZ 30D	29.02	30.51	55	5	250	0.5	0.2	23
GMZ 33A	29.68	31.22	65	5	250	0.5	0.2	25
GMZ 33B	30.32	31.88	65	5	250	0.5	0.2	25
GMZ 33C	30.9	32.5	65	5	250	0.5	0.2	25
GMZ 33D	31.49	33.11	65	5	250	0.5	0.2	25
GMZ 36A	32.14	33.79	75	5	250	0.5	0.2	27
GMZ 36B	32.79	34.49	75	5	250	0.5	0.2	27
GMZ 36C	33.4	35.13	75	5	250	0.5	0.2	27
GMZ 36D	34.01	35.77	75	5	250	0.5	0.2	27
GMZ 39A	34.68	36.47	85	5	250	0.5	0.2	30
GMZ 39B	35.36	37.19	85	5	250	0.5	0.2	30
GMZ 39C	36	37.85	85	5	250	0.5	0.2	30
GMZ 39D	36.63	38.52	85	5	250	0.5	0.2	30
GMZ 43	40	45	90	5	-	-	0.2	33
GMZ 47	44	49	90	5	-	-	0.2	36
GMZ 51	48	54	110	5	-	-	0.2	39
GMZ 56	53	60	110	5	-	-	0.2	43

GMZ2.0~GMZ56

RATING AND CHARACTERISTIC CURVES

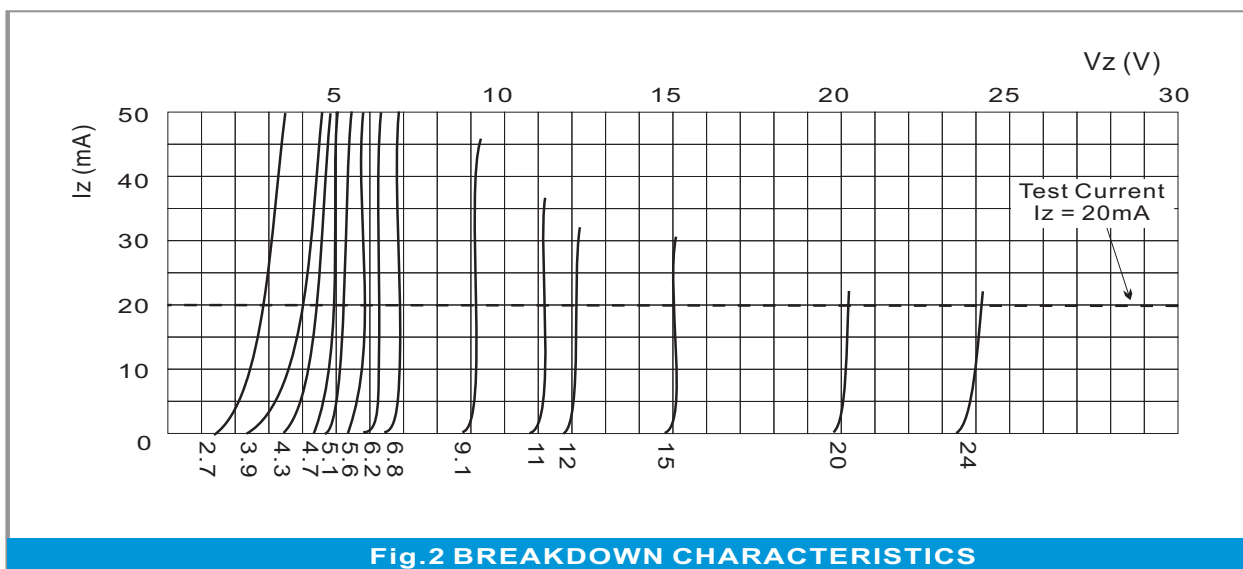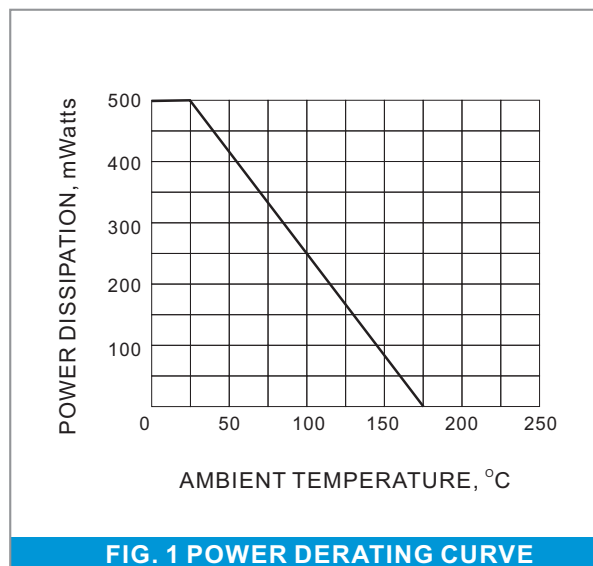


GMZ2.0~GMZ56

MOUNTING PAD LAYOUT

MICRO-MELF

Unit: inch (mm)

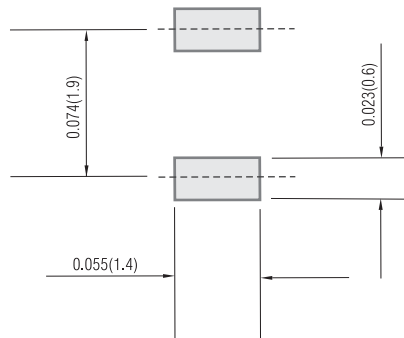

ORDER INFORMATION

- Packing information

T/R - 10K per 13" plastic Reel

T/R - 2.5K per 7" plastic Reel

GMZ2.0~GMZ56

Part No_packing code_Version

GMZ2.0_R1_00001

GMZ2.0_R2_00001

For example :

RB500V-40_R2_00001



Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			

GMZ2.0~GMZ56

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.