


0.2A High Voltage Rectifiers

Features

- Avalanche operation
- Beveled round chip
- Low cost
- RoHS Compliance



DO-15



Mechanical Data

Case:	JEDEC DO-204AC(DO-15) molded plastic body
Epoxy:	Plastic package has UL flammability classification 94V-0
Terminals:	Plated axial leads, solderable per MIL-STD-202, Method 208
Polarity:	Color band denotes cathode end
Weight:	0.015 ounces, 0.4 gram

Maximum Ratings and Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless noted otherwise)

Symbol	Description	GP235	GP240	GP250	GP260	Unit	Conditions
VRRM	Maximum Repetitive Peak Reverse Voltage	3500	4000	5000	6000	V	
VRMS	Maximum RMS Voltage	2450	2800	3500	4200	V	
VDC	Maximum DC Blocking Voltage	3500	4000	5000	6000	V	
IF(AV)	Maximum Average Forward Rectified Current	0.2				A	0.375" (9.5mm) lead length TA=55° C
IFSM	Peak Forward Surge Current	25		20		A	8.3ms single half sine-wave superimposed on rated load (JEDEC Method)
VF	Maximum Instantaneous Forward Voltage	5.0		7.0		V	IF=0.2A
IR	Maximum DC Reverse Current at Rated DC Blocking Voltage	5.0				μA	TA=25° C
		50					TA=100° C

0.2A High Voltage Rectifiers

GP235 - GP260

Symbol	Description	GP235	GP240	GP250	GP260	Unit	Conditions
C _J	Typical Junction Capacitance	7		5		pF	VR=4V, f=1MHz
R _{thJA}	Typical Thermal Resistance	50				°C / W	Note
T _J	Operating Junction Temperature Range	-55 to +125				° C	
T _{STG}	Storage Temperature Range	-55 to +150				° C	

Note: Both leads attached to heatsink 20x20x15(mm) copper plate at lead length 5mm.

Typical Characteristics Curves

Fig.1-Max. Forward Current Derating Curve

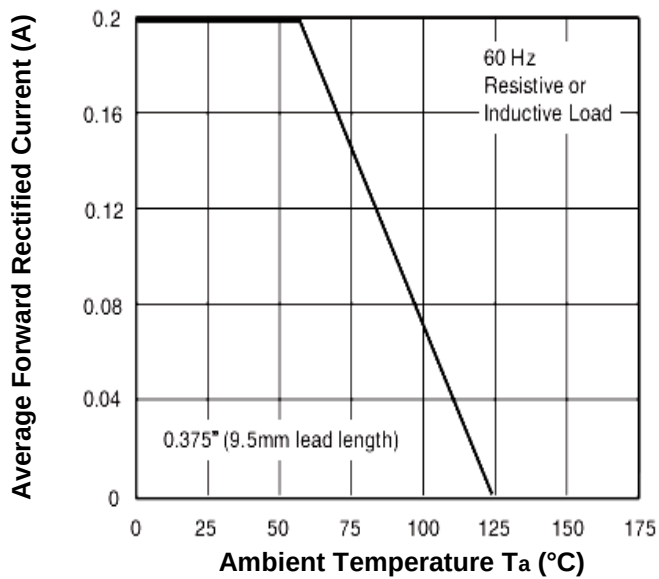


Fig.2-Max. Non-Repetitive Peak Forward Surge Current

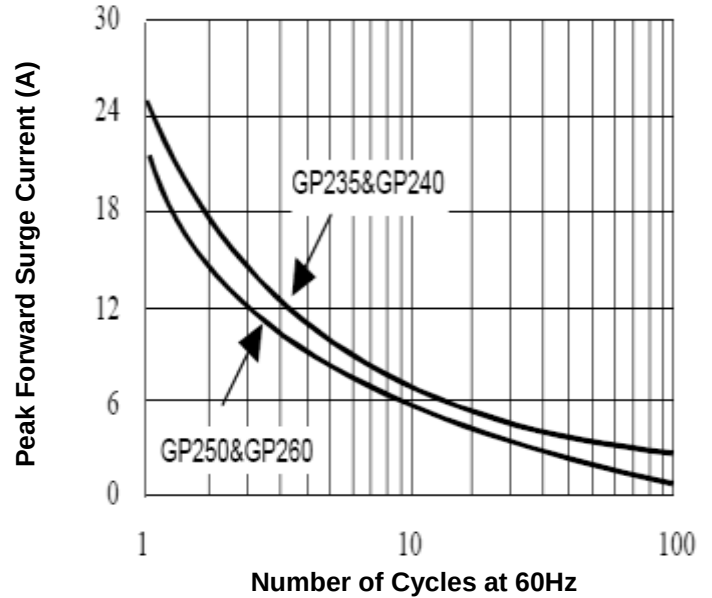


Fig.3- Typical Instantaneous Forward Characteristics

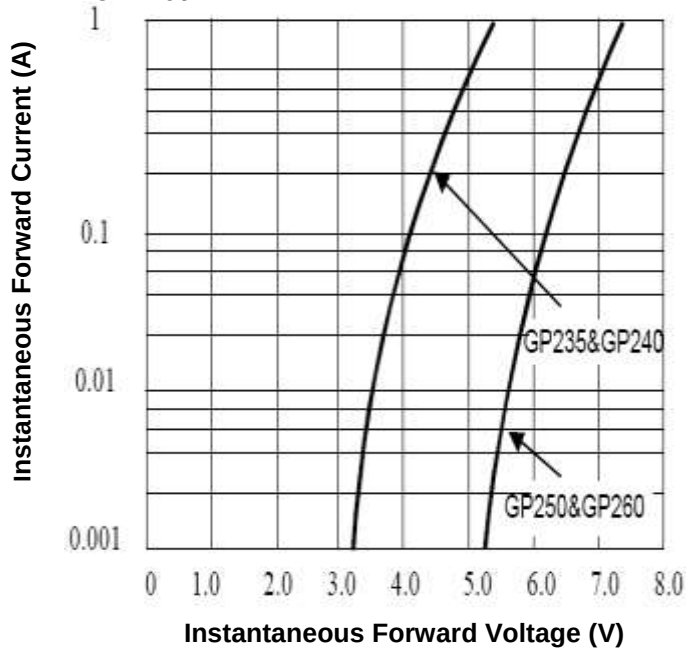


Fig.4-Typical Reverse Characteristics


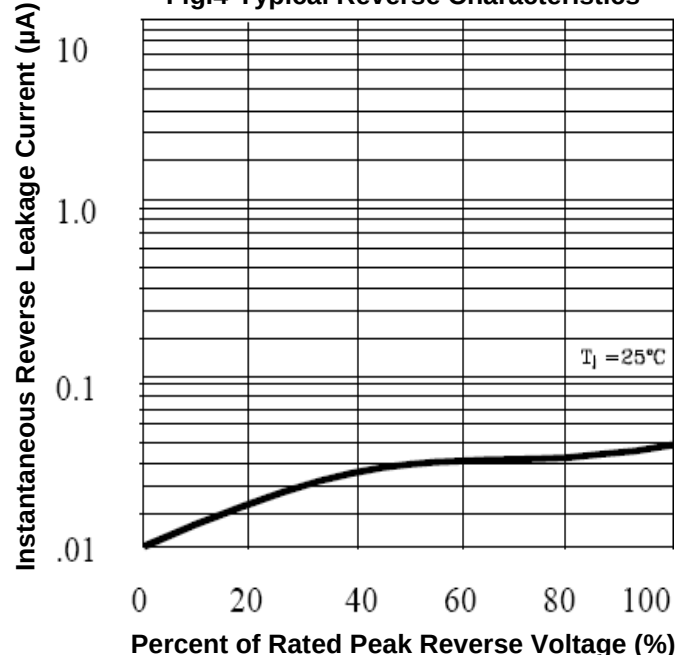



Fig.5- Typical Junction Capacitance

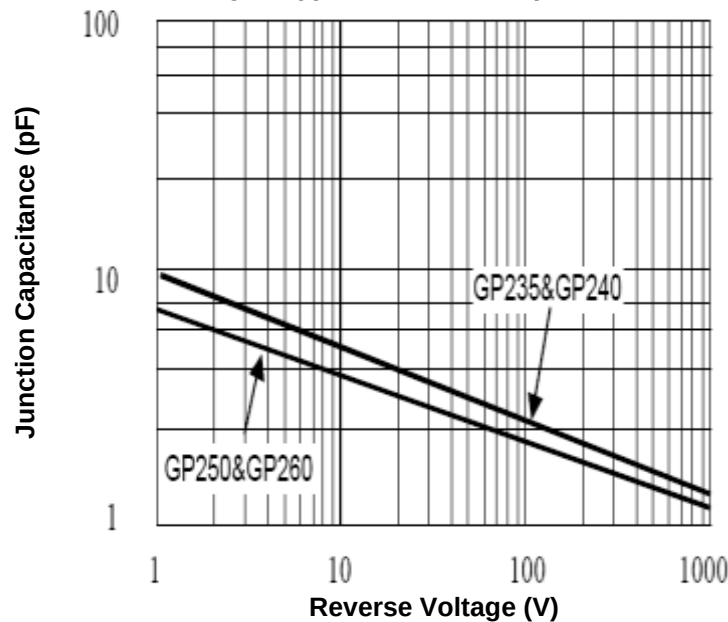

0.2A High Voltage Rectifiers

GP235 - GP260

Dimensions in inches (mm)

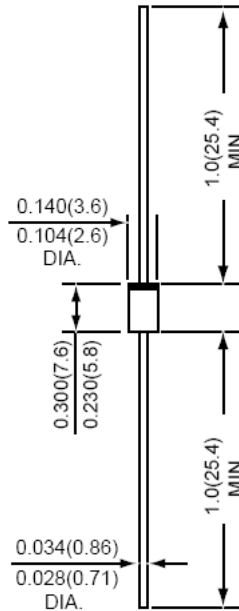

DO-15

How to contact us

USA HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800)-TAITRON (800)-824-8766 (661)-257-6060

Fax: (800)-TAITFAX (800)-824-8329 (661)-257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS INCORPORATED TAIWAN BRANCH

6F., NO.190, SEC. 2, ZHONGXING RD., XINDIAN DIST., NEW TAIPEI CITY 23146, TAIWAN R.O.C.

Tel: 886-2-2913-6238

Fax: 886-2-2913-6239

TAITRON COMPONENT TECHNOLOG SHANGHAI CORPORATION

SUITE 1503, METROBANK PLAZA, 1160 WEST YAN'AN ROAD, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-2302-5027