

GSC302-20M0900

900MHz Band 20dB Chip Coupler

[Inquire](#)

Compact & High power capability.

Application

for RF power amplifier (Base station)

Characteristics

GSC302-20M0900


Zin/Zout	50 ohm Nominal
Frequency Range	800-1000MHz
Insertion Loss	0.2dB max at 25 Deg.C
Coupling	19.5+/-1.5dB
V.S.W.R	1.18 max
Directivity	25dB min
Input Power	200W Avg/CW
Operating Temperature	-40 up to 125 Deg.C
Storage Temperature	-40 up to 85 Deg.C
	(-20 up to 35 Deg.C for tape and reel materials)

Number of ordered pieces

1000pcs/Reel

Dimensions

Dimension (Unit : mm)

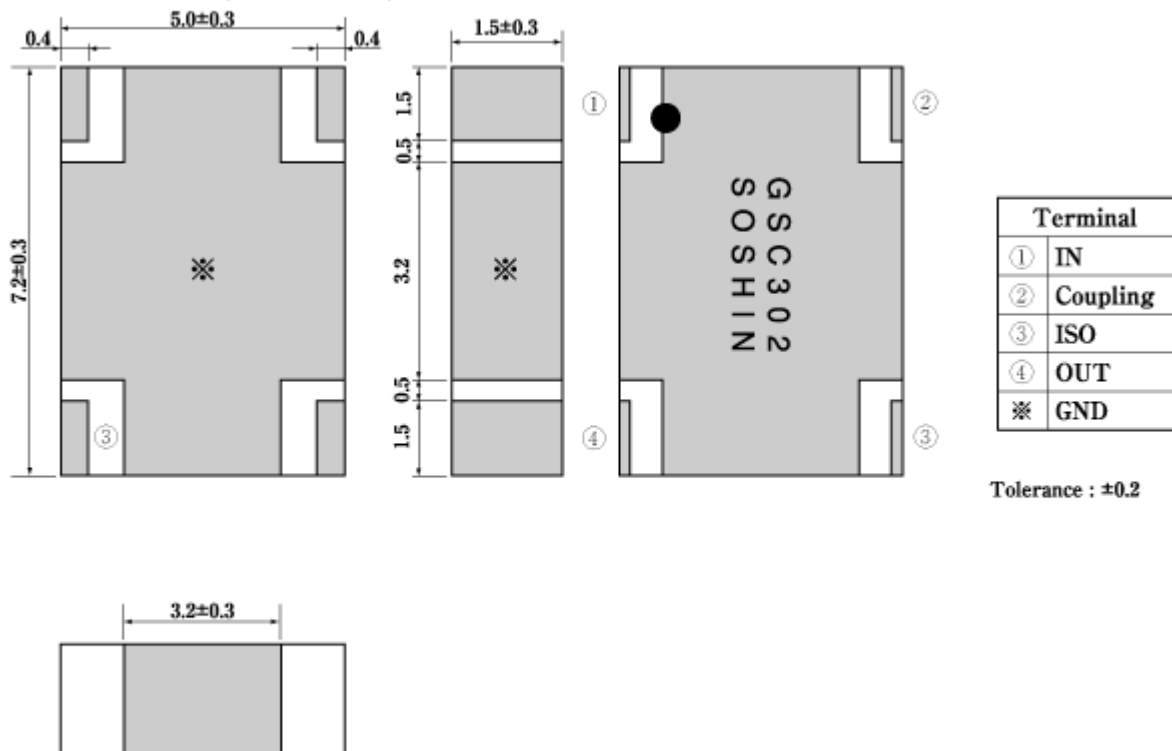

Measurement circuit

1. Note


Heat Dissipation

Please let me emit sufficient heat so that product surface temperature may become quantity fewer than 120deg, and use it.

2. Measuring Circuit

All items of electrical characteristics shall be measured on test fixture which is decided by supplier.


Network analyzer

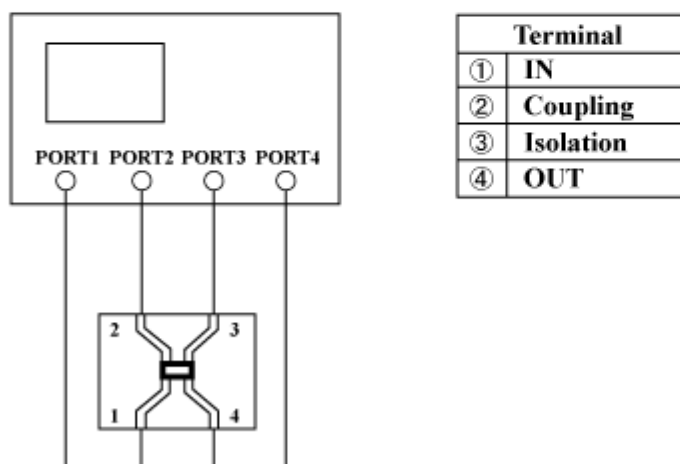

Recommended pattern (Unit:mm)

Measurement board pattern

(Example : $\epsilon = 2.6$, $t = 0.8\text{mm}$ Double side printed circuit board)

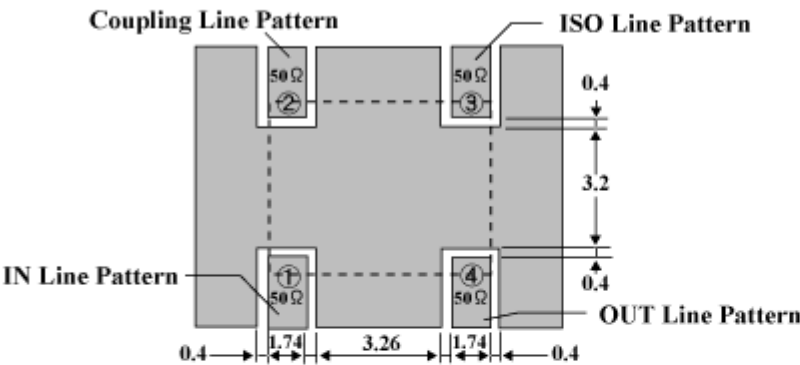

Terminal	
①	IN
②	Coupling
③	ISO
④	OUT
※	GND

