

GSEP950B1

VHF.UHF/BS

[Inquiry](#)

Applocation

for Spurious reduction

Characteristics


GSEP950B1	
Zin/Zout	75 ohm Nominal
Pass Band	950 up to 2150MHz
Insertion Loss	1.0dB max (950 up to 1335MHz)
	1.3dB max (1335 up to 1770MHz)
	2.0dB max (1770 up to 2150MHz)
V.S.W.R	2.0 max (950 up to 1335MHz)
	2.2 max (1335 up to 1770MHz)
	2.7 max (1770 up to 2150MHz)
Attenuation	20 dB mim (0 up to 770MHz)

Number of ordered pieces

500pcs/Reel

Dimensions

Dimension (Unit : mm)

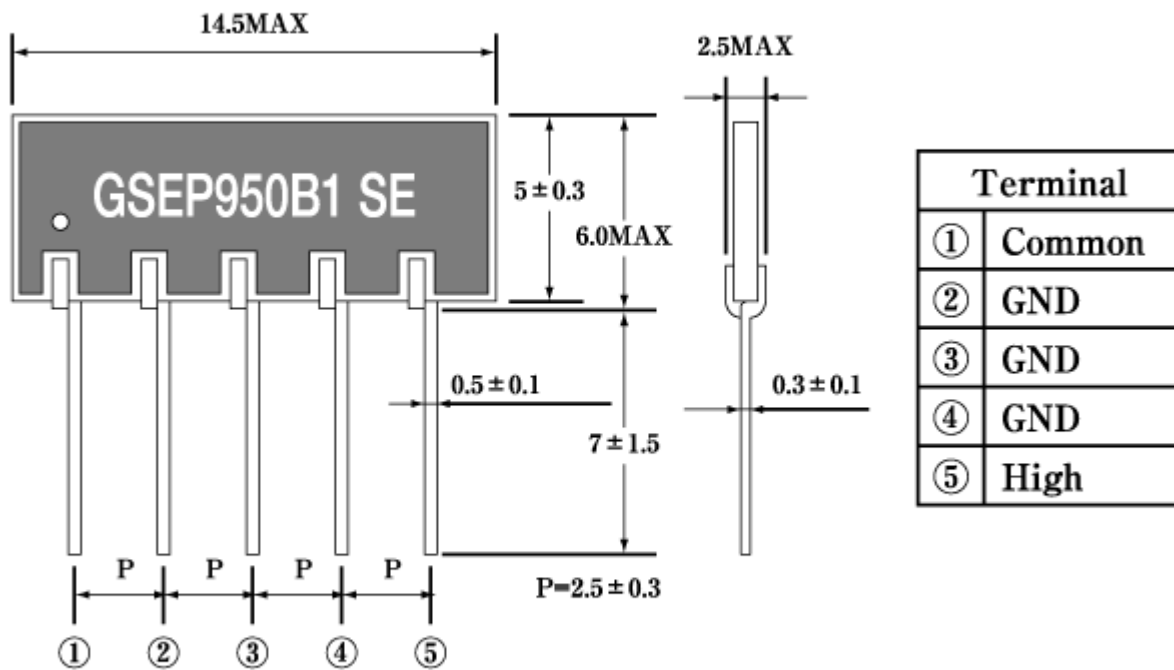

Frequency Data

