
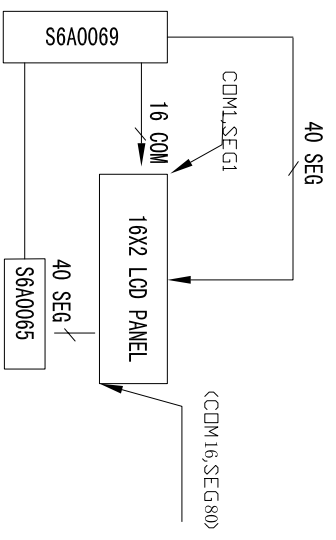
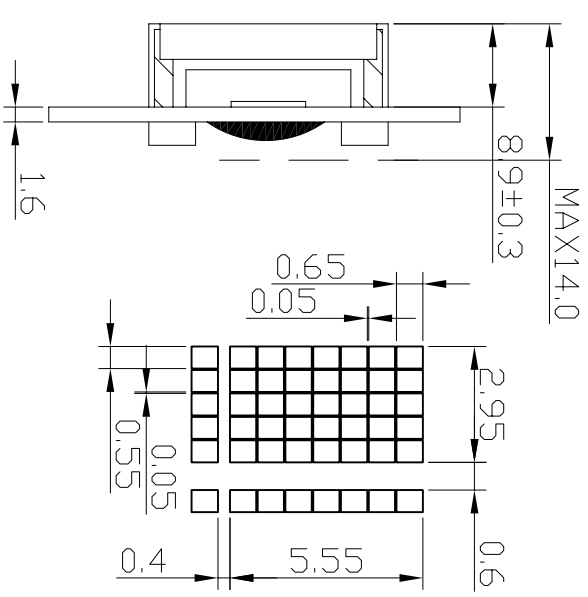


REV.	CHANGE CONTENT	BY	DATE

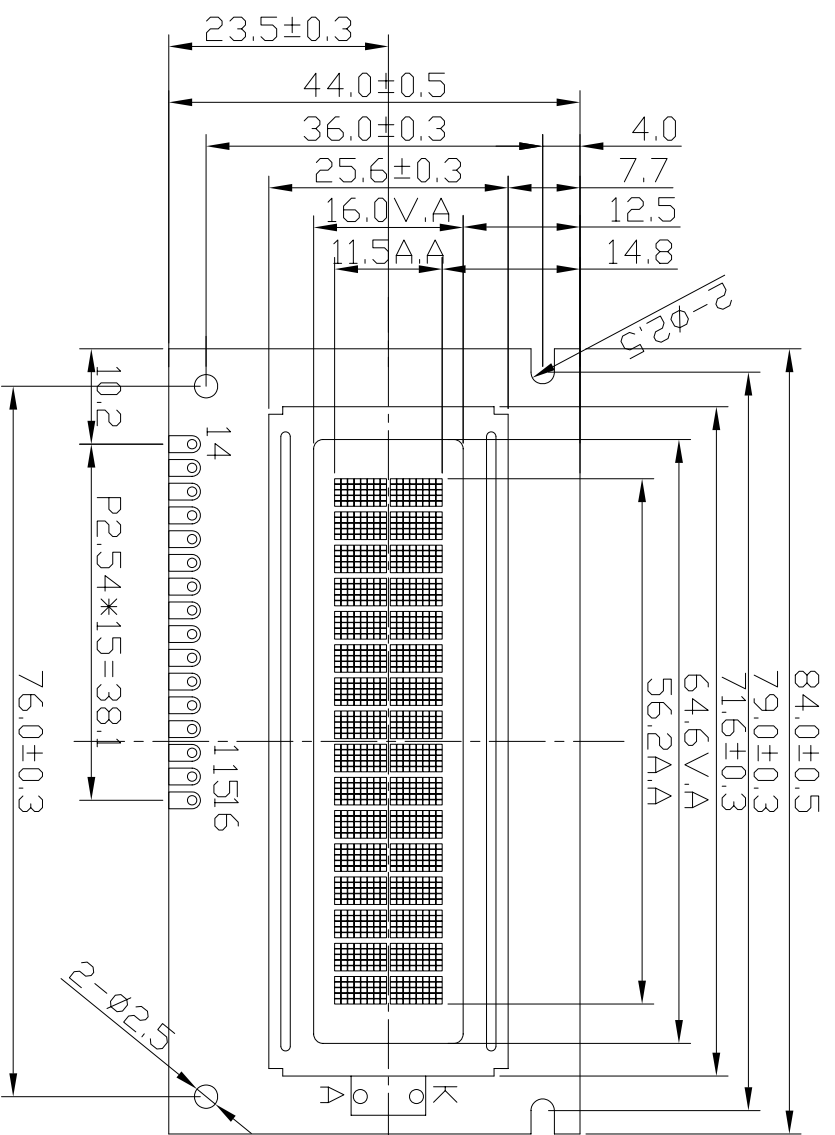

NOTE:

1. DISPLAY TYPE: STN-GRAY-POSITIVE
2. DISPLAY MODE: TRANSPARENT
3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, 4.6V Vop, 5V VDD
4. VIEWING DIR.: 6:00
5. OP. TEMP.: -20°C~70°C
6. ST. TEMP.: -30°C~80°C
7. BACKLIGHT: COLOR-γ/G, 5.0±0.2V, 130mA, MIN.80 CD/m
8. DRIVER IC:S6A0069,S6A0065

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
SYMBOL	GND	VDD	V0	RS	R/W	E	D0	D1	D2	D3	D4	D5	D6	D7	LED+	LED-

TOLERANCE				HTDISPLAY CO., LTD.				DRAWING No.: HCD60205C-GF62L-VW			
>0~6 ±0.10				DESIGN				DRAWING TITLE: LCM DRAWING			
>6~80 ±0.20				WANG RUYI				FILE NO.: 8			
>80~240 ±0.30				06.12.17				REV.: A			
>240~400 ±0.50				STANDARD				SCALE: -			
// L ⊙ ±0.10				TECHNOLOGY				UNIT: mm			
APPROVED				Q.A				PROJECTION: 1/1			