


REV.	CHANGE CONTENT	BY	DATE
B	CHANGE VOP AND DISPLAY TYPE	ZOUYS	06.08.09

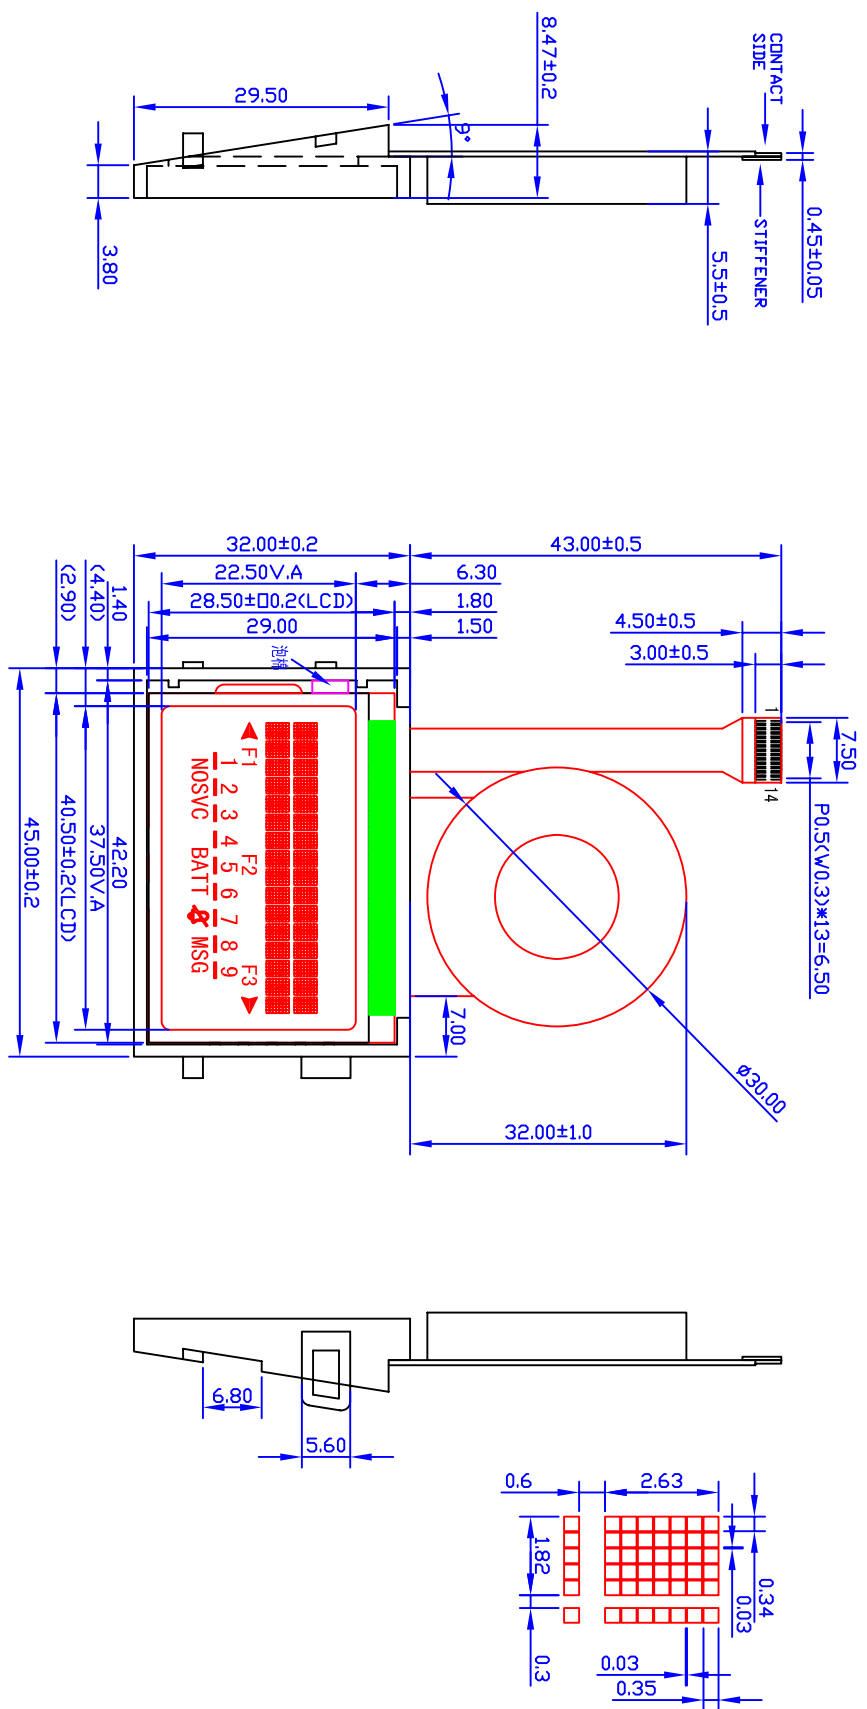

- NOTE:
1. DISPLAY TYPE: STN, POSITIVE, REFLECTIVE, GRAY
 2. VIEWING DIR: 6:00
 3. DRIVE METHOD: 1/33 DUTY, 1/5 BIAS, Vop 4.85V VDD=5.0V
 4. OP. TEMP: -20~70°C
 5. ST. TEMP: -30~80°C
 6. DRIVER IC: KS0073

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14
SYMBOL	VDD	NC	SA	RS	R/W	E	D4	D5	D6	NC	D7	SK	VCI	VSS

TOLERANCE		 HTDISPLAY CO., LTD.				DRAWING No. : HCL60209C-GR62N-VA	
>0~6	±0.10					DRAWING TITLE: LCM DRAWING	
>6~80	±0.20					FILE NO. : 7	
>80~240	±0.30						
DESIGN	ZOUMS	05.06.03	STANDARD		REV. : B	SCALE : -	
CHECKED			TECHNOLOGY			UNIT : mm	
// 1 @ ±0.10	APPROVED		Q.A			SHEET : 1/1	