




PRODUCT SPECIFICATION

HDM6448-1

640 x 480 GRAPHICS
LCD DISPLAY MODULE

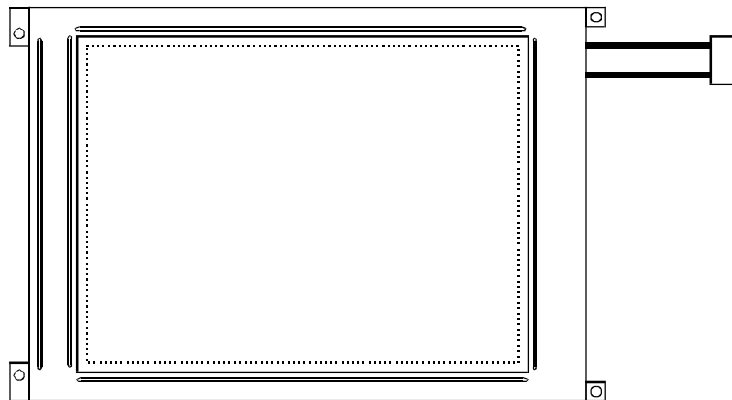

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JB	REV.: 1.0	HDM6448-1	SHEET 1 OF 15
				DATE: 7/28/00

MECHANICAL DATA

(1) Product No. **HDM6448-1**
 (2) Module Size 260.0 (W)mm x 174.0 (H)mm x MAX8.0 (D)mm
 (3) Dot Size 0.27 (W)mm x 0.27 (H)mm
 (4) Dot Pitch 0.30 (W)mm x 0.30 (H)mm
 (5) Number of Dots 640 (W) x 480 (H)Dots
 (7) Duty 1/240
 (8) LCD Display Mode STN: ☐ Bule Mode
 FSTN: ☐ Black and White(Normally White/Positive Image)
☐ Black and White(Normally Black/Negative Image)
 Rear Polarizer: ☐ Reflective ☐ Transflective ☐ Transmissive
☐ Transflective (High Transmissive)
 (9) Viewing Direction ☐ 6 O'clock ☐ 12 O'clock ☐ ____O'clock
 (10) Backlight ☐ CCFL
 (11) Weight W/O B/L: about 348 g
 CCFL B/L: about 353.5 g

HANTRONIX, INC.
 10080 BUBB RD.
 CUPERTINO, CA 95014

Q.A.:
 JB

REV.:
 1.0

HDM6448-1

SHEET 2 OF 15

DATE: 7/28/00

ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

VSS=0 V Standard

ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	-0.3	6.5	V	
Input Voltage	VDD-VEE	0	27	V	
Static Electricity	-	-	-	-	Note 1

Note 1 LCM should be grounded during handling LCM.

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	NORMAL TEMP.			
	OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	0	50	-25	60
Humidity (Without Condensation)	Note 2,4		Note 3,4	
Vibration(Note ※)	-		49m/s ² (5G)	

Note 2 Ta ≤ 50°C : 85%RH max

Ta > 50°C : Absolute humidity must be lower

than the humidity of 85%RH at 50°C

Note 3 Ta at -25°C will be < 48 hrs, at 60°C will be < 120 hrs

Note 4 Background color will change slightly depending on ambient temperature.
That phenomenon is reversible.

Note※

Frequency (HZ)	10~55~10/1 min
Vibration Width	1.5 m/m
Vibration Direction	X/Y/Z
Vibration Time	15 min-1cycle X 3 directions

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JB	REV.: 1.0	HDM6448-1	SHEET 3 OF 15
				DATE: 7/28/00

ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT
Power Supply for Logic	VDD-VSS	—		2.7	3.0	3.3	V
				4.75	5.0	5.25	
Input Voltage	VIL	L level		0	—	0.2VDD	V
	VIH	H level		0.8VDD	—	VDD	V
LCM Recommend LCD Module Driving Voltage	VDD-VEE	VDD=5V Duty=1/240 Bias=1/13	0℃	23.4	23.8	24.2	V
			25℃	22.2	22.6	23.0	
			50℃	20.9	21.3	21.7	
Power Supply Current for LCM	IDD	VDD=5.0V VDD-VEE=22.6V FLM=70Hz		—	30	—	mA
	IEE			—	20	—	
Power Supply Current for CCFL B.L.	ICCFL	450 Vrms 30KHz		—	5	—	mA

OPTICAL CHARACTERISTICS

AT Vop

ITEM MODE		Cr(Contrast Ratio)						θ (Viewing Angle)		ϕ (Viewing Angle)	
		0 τ		25 τ		50 τ		25 τ		25 τ	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
R	J	—	—	—	5.5	—	—	—	50	—	30
S	J	—	—	—	5.0	—	—	—	45	—	28
T	E	—	—	—	3.5	—	—	—	45	—	26
	G	—	6.5	—	8.0	—	4.5	—	40	—	55
NOTE		NOTE6						NOTE5			

NOTE :

R: REFLECTIVE

S: TRANSFLECTIVE(Normal)

T: TRANSMISSIVE

E: BLUE

G: NORMALLY BLACK

J: NORMALLY WHITE

AT $\phi=0^\circ$ $\theta=0^\circ$

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	0 τ	—	340	680	ms	NOTE 2
		25 τ	—	120	240		
		50 τ	—	90	180		
Response Time (fall)	Tr	0 τ	—	370	710	ms	NOTE 2
		25 τ	—	170	290		
		50 τ	—	80	170		

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:

JB

REV.:

1.0

HDM6448-1


SHEET 5 OF 15

DATE:


7/28/00

(NOTE 1)

Definition of Operation Voltage(V_{op})

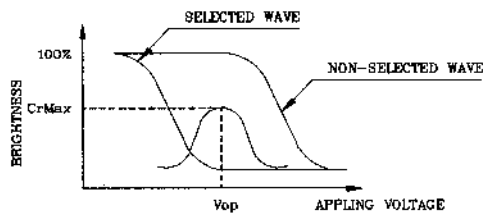

(positive type)

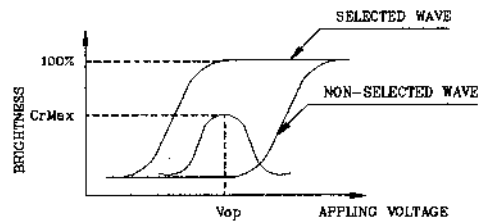

(negative type)

*Conditions


Viewing Angle : 0

Frame Frequency : 70Hz


Applying Waveform : 1/N duty 1/a bias

(NOTE 2)

Definition of Response Time(T_r, T_f)

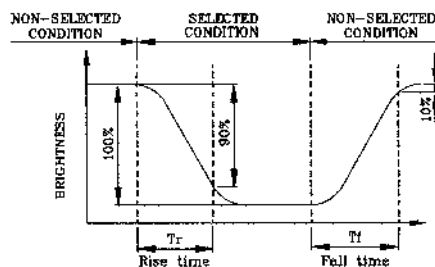

(positive type)

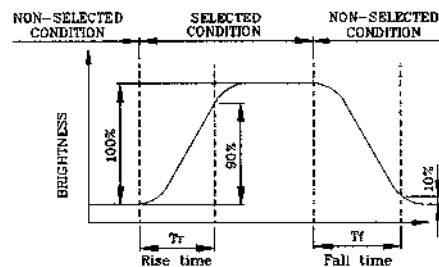

(negative type)

*Conditions

Operating Voltage : V_{op}


Viewing Angle (θ) : (0.0)

Frame Frequency : 70Hz


Applying Waveform : 1/N duty 1/a bias

(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

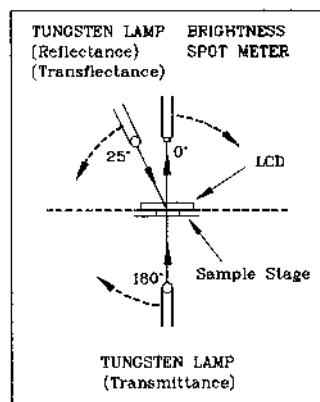

CONST.
TEMP.
CHAMBER

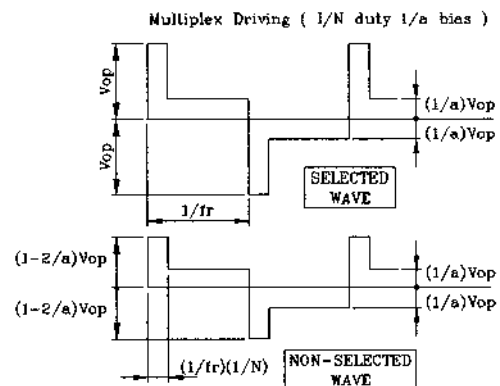

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:
JB

REV.:
1.0


HDM6448-1

SHEET 6 OF 15

DATE:
7/28/00



(NOTE 4)

Definition of Viewing Direction

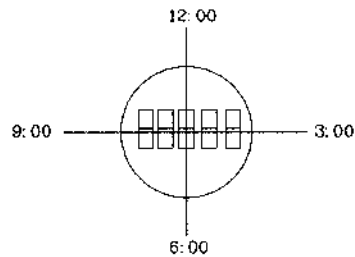

(NOTE 5)

Definition of Viewing Angle

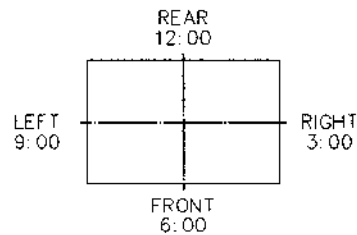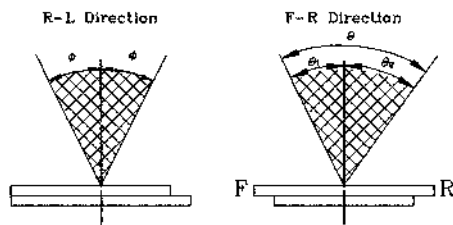

*For This Product

The Viewing Direction is 6 O'clock
So $\theta_1 > \theta_2$

$$\theta = \theta_1 + \theta_2$$

*Conditions

Operating Voltage : V_{op}


Frame Frequency : 70Hz

Applying Waveform : 1/N duty 1/a bias


Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

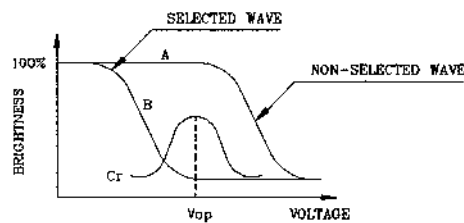

(positive type)

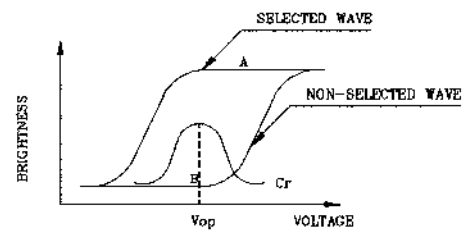

(negative type)

$$\text{Contrast Ratio : } Cr = A/B$$

*Conditions

Viewing Angle : 0

Frame Frequency : 70Hz

Applying Waveform : 1/N duty 1/a bias

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:

JB

REV.:

1.0


HDM6448-1

SHEET 7 OF 15

DATE:

7/28/00

BLOCK DIAGRAM

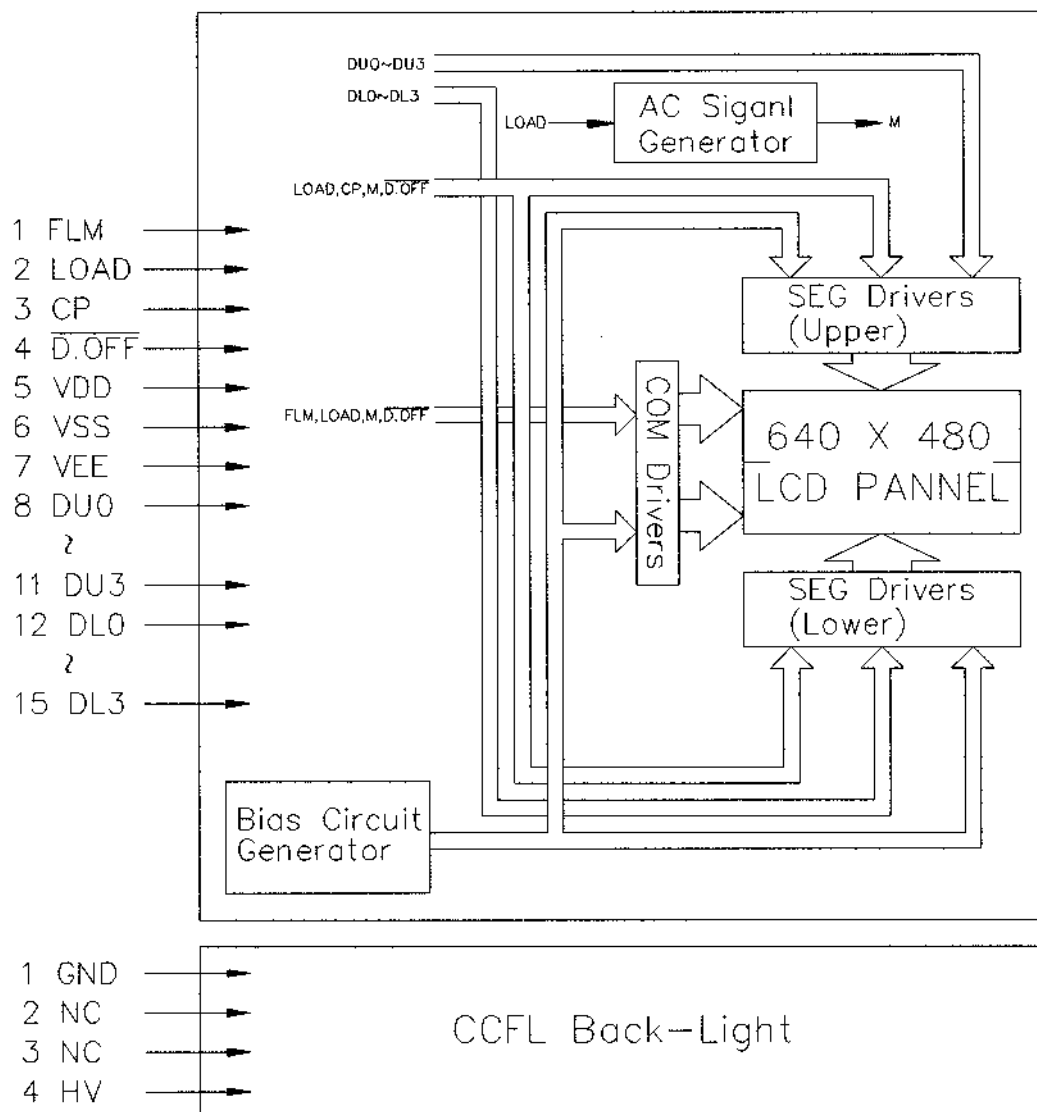

* AC Signal Setting

J1	J2	J3	J4	J5	J6	J7	J8
H	L	L	H	H	L	L	L

INTERNAL PIN CONNECTION

LCD

Pin No.	Symbol	Level	Function
1	FLM	H/L	SCAN START-UP SIGNAL
2	LOAD	H→L	DATA LATCH PULSE
3	CP	H→L	DATA SHIFT PULSE
4	$\overline{D.OFF}$	H/L	DISPLAY OFF ("H"=ON,"L"=OFF)
5	VDD	—	POWER SUPPLY FOR LOGIC (+5V)
6	VSS	—	SIGNAL GROUND (GND)
7	VEE	—	POWER SUPPLY FOR LCD (—V)
8	DU0	H/L	DISPLAY DATA (UPPER HALF)
9	DU1		
10	DU2		
11	DU3		
12	DL0	H/L	DISPLAY DATA (LOWER HALF)
13	DL1		
14	DL2		
15	DL3		

CCFT

Pin No.	Symbol	Level	Function
1	GND	—	GROUND LINE (INVERTER)
2	NC	—	NON CONNECTION
3	NC	—	NON CONNECTION
4	HV	—	HIGH VOLTAGE LINE (INVERTER)

LCD

Used connector : 53261-1590 (MOLEX)

Mating connector : 51021-1500 (MOLEX)

CCFT

Used connector : M63M83-04 (MITSUMI)


Mating connector : M60-04-30-114P (MITSUMI)

M60-04-30-134P (MITSUMI)

M61M73-04 (MITSUMI)

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JB	REV.: 1.0	HDM6448-1	SHEET 9 OF 15
				DATE: 7/28/00

POWER SUPPLY

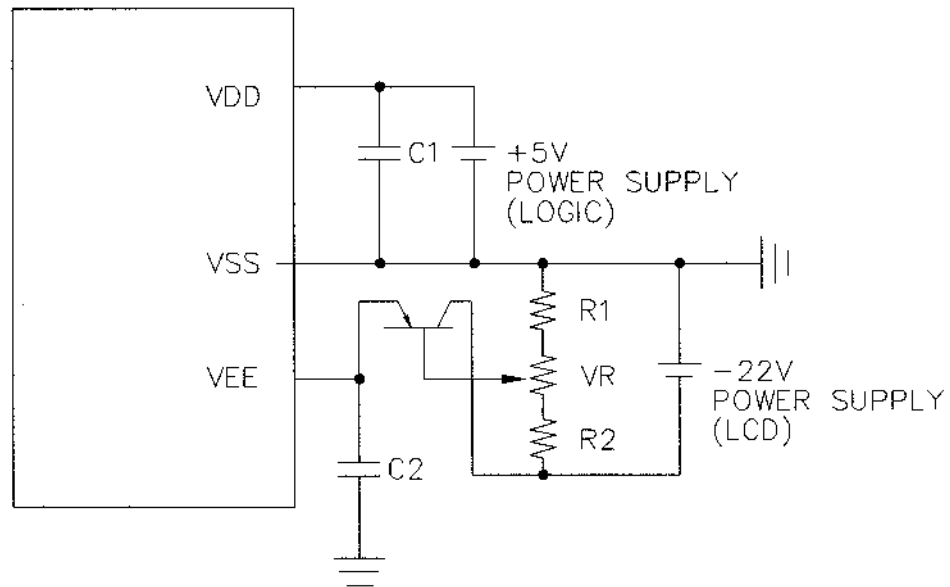

$$1. R1 + VR + R2 = 10K \sim 20K \Omega$$

$$2. C1, C2 : 10 \mu F$$

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:
JB

REV.:
1.0

HDM6448-1


SHEET 10 OF 15

DATE: 7/28/00

TIMING CHARACTERISTICS

@VDD=2.5~5.5V

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Shift Clock Period	t_{cp}	152	—	—	ns
"CP" PULSE WIDTH	t_w	65	—	—	ns
CLOCK RISE, FALL TIME	t_r, t_f	—	—	50	ns
DATA SETUP TIME	t_{osu}	50	—	—	ns
DATA HOLD TIME	t_{ohd}	40	—	—	ns
"CP" → "LOAD" FALL TIME	t_{lsu}	65	—	—	ns
"LOAD" → "CP" FALL TIME	t_{lc}	65	—	—	ns
"FLM" SETUP TIME	t_{setup}	100	—	—	ns
"FLM" HOLD TIME	t_{hold}	100	—	—	ns
"LOAD" PULSE WIDTH	t_{wc}	65	—	—	ns

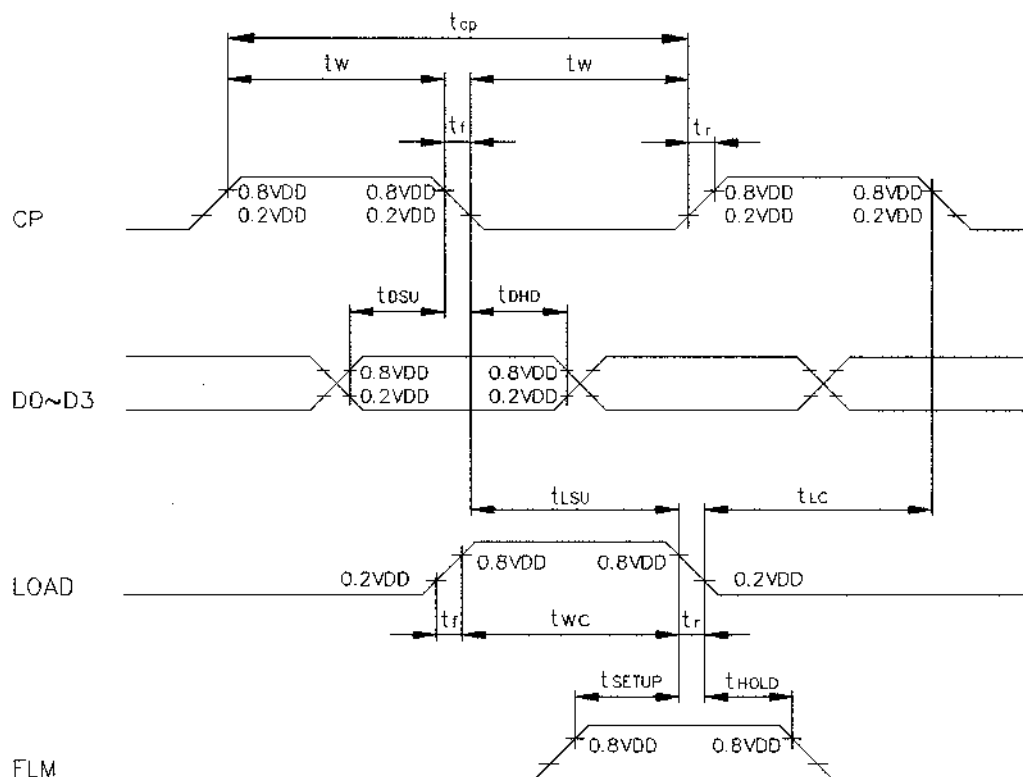

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:
JB


REV.:
1.0

HDM6448-1

SHEET 11 OF 15

DATE:
7/28/00

TIMING TIMING

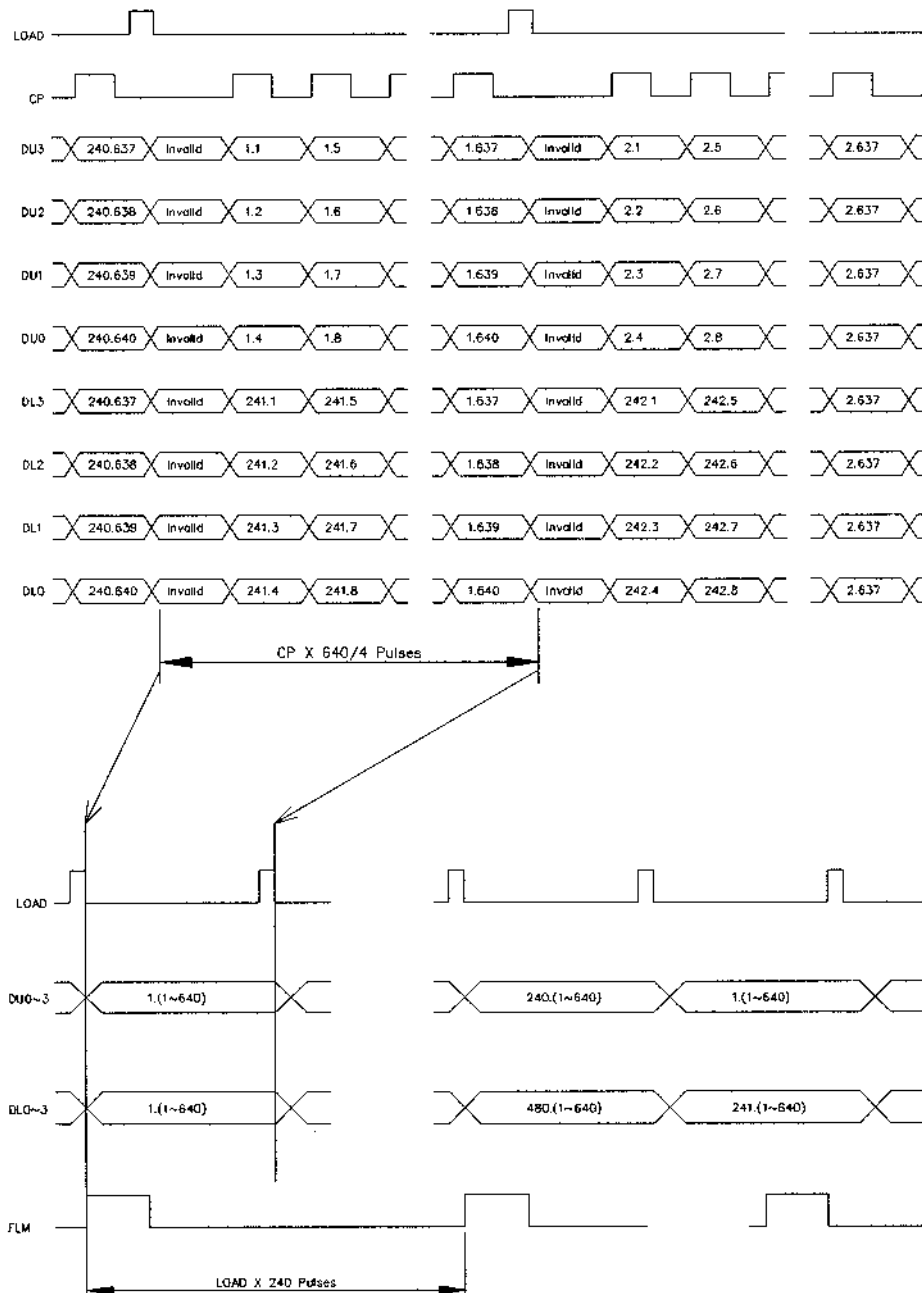

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:
JB


REV.:
1.0

HDM6448-1

SHEET 12 OF 15

DATE:
7/28/00


POWER ON/OFF TIMING

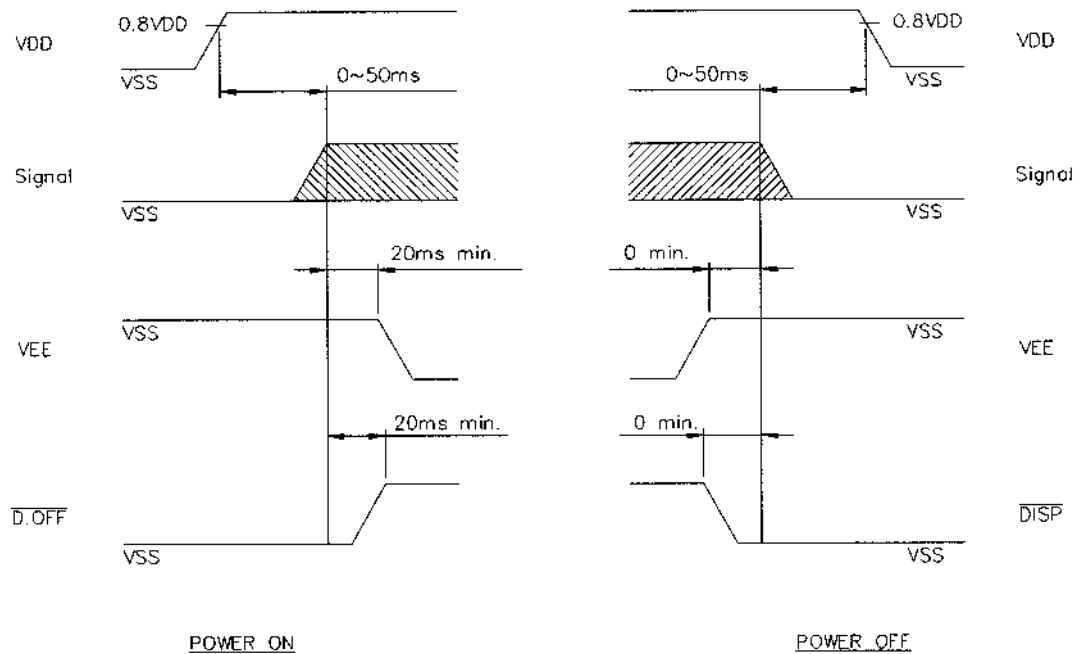


The missing pixels may occur when the LCM is driven beyond above power interface timing sequence.

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JB	REV.: 1.0	HDM6448-1	SHEET 13 OF 15
				DATE: 7/28/00

DISPLAY PATTERN

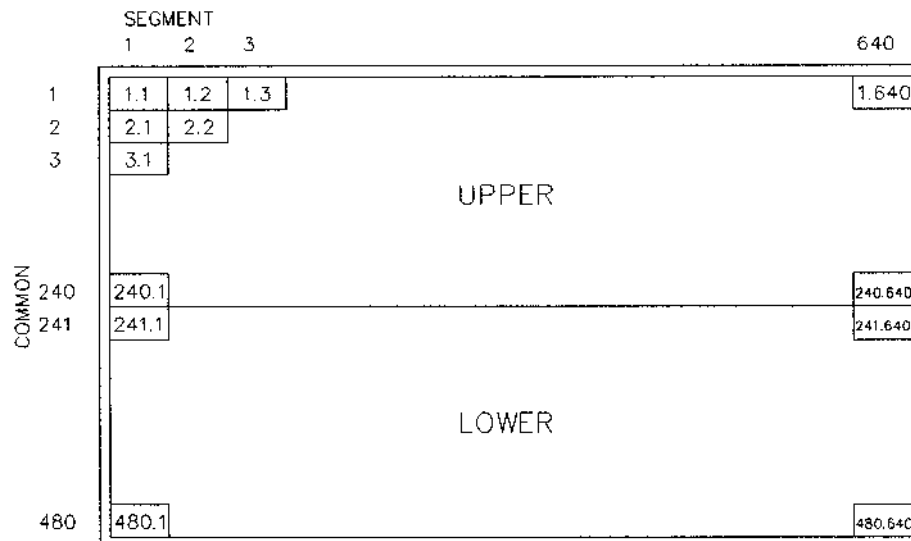

NOTE : 1.1 MEANS 1ST COMMON 1ST SEGMENT DOT

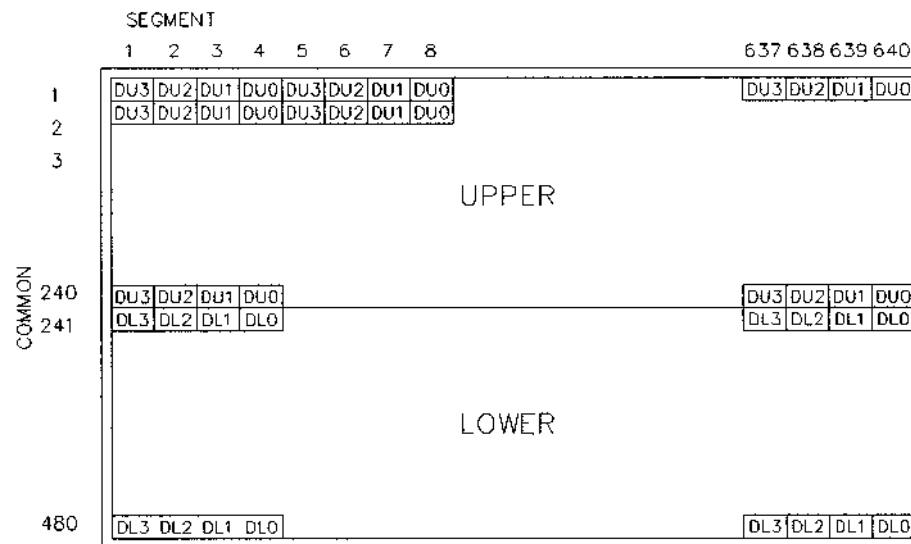

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014


Q.A.:
JB

REV.:
1.0

HDM6448-1

SHEET 14 OF 15

DATE:
7/28/00

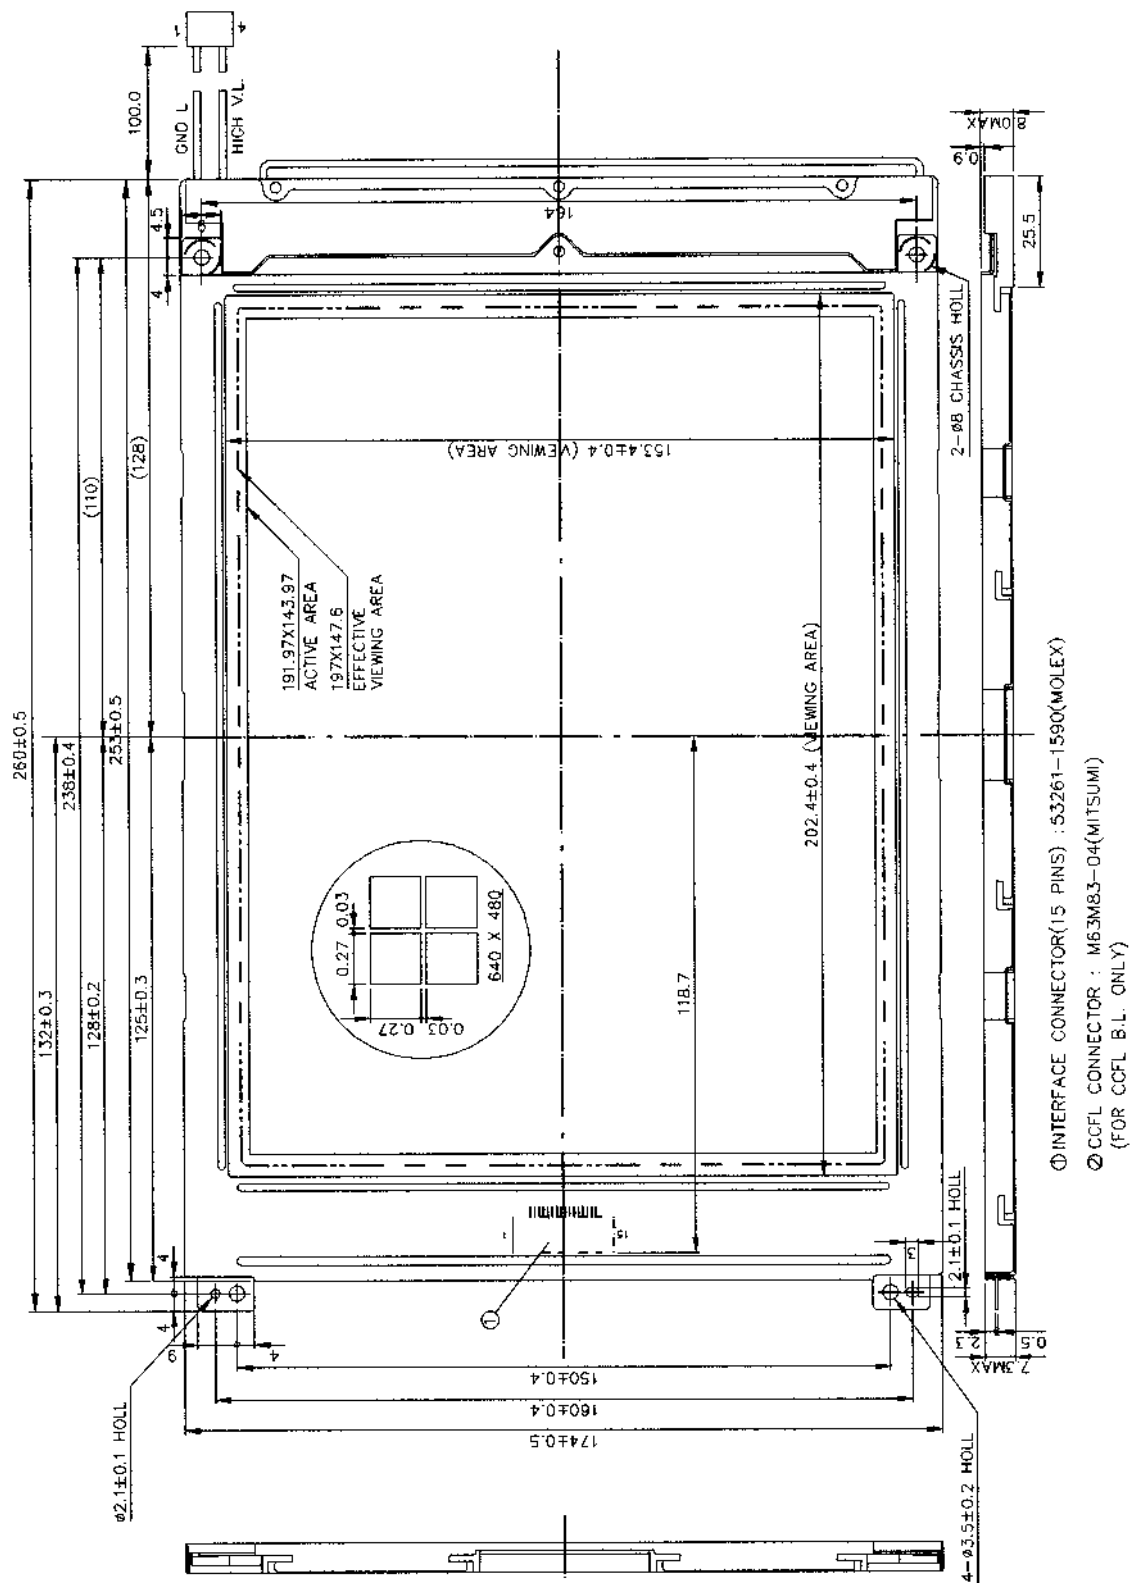

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:
JB

REV.:
1.0

HDM6448-1

SHEET 15 OF 15

DATE:
7/28/00