

HER151G THRU HER157G

ULTRAFAST EFFICIENT GLASS PASSIVATED RECTIFIER

VOLTAGE: 50 TO 1000V

CURRENT: 1.5A




FEATURE

Low power loss
High surge capability
Glass passivated chip junction
Ultra-fast recovery time for high efficiency
High temperature soldering guaranteed
250°C/10sec/0.375" lead length at 5 lbs tension

MECHANICAL DATA

Terminal: Plated axial leads solderable per
MIL-STD 202E, method 208C
Case: Molded with UL-94 Class V-0 recognized Flame
Retardant Epoxy
Polarity: color band denotes cathode
Mounting position: any

DO-15/DO-204AC

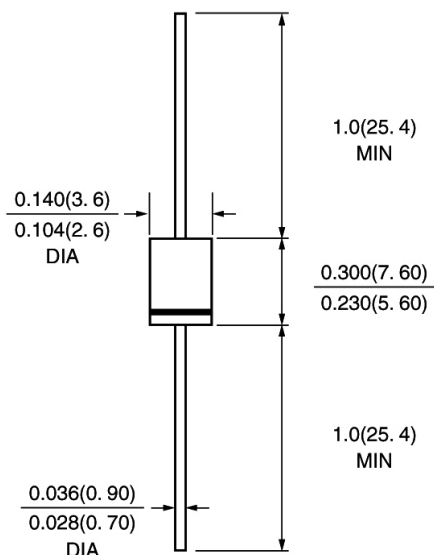

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	HER 151 G	HER 152 G	HER 153 G	HER 154 G	HER 155 G	HER 156 G	HER 157 G	HER 158 G	units
Maximum Recurrent Peak Reverse Voltage	Vrrm	50	100	200	300	400	600	800	1000	V
Maximum RMS Voltage	Vrms	35	70	140	210	280	420	560	700	V
Maximum DC blocking Voltage	Vdc	50	100	200	300	400	600	800	1000	V
Maximum Average Forward Rectified Current 3/8 " lead length at Ta =65°C	If(av)	1.5								A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	Ifsm	50								A
Maximum Forward Voltage at Forward current 1.5A Peak	Vf	1.0				1.3	1.7			V
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =125°C	Ir	10.0 100.0								μ A μ A
Maximum Reverse Recovery Time (Note 1)	Trr	50					75			nS
Typical Junction Capacitance (Note 2)	Cj	50					30			pF
Typical Thermal Resistance (Note 3)	Rth(ja)	25.0								°C/W
Storage and Operating Junction Temperature	Tstg,Tj	-55 to +150								°C

Note:

1. Reverse Recovery Condition I_f =0.5A, I_r =1.0A, I_{rr} =0.25A
2. Measured at 1.0 MHz and applied reverse voltage of 4.0V_{dc}
3. Thermal Resistance from Junction to Ambient at 3/8" lead length, P.C. Board Mounted

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

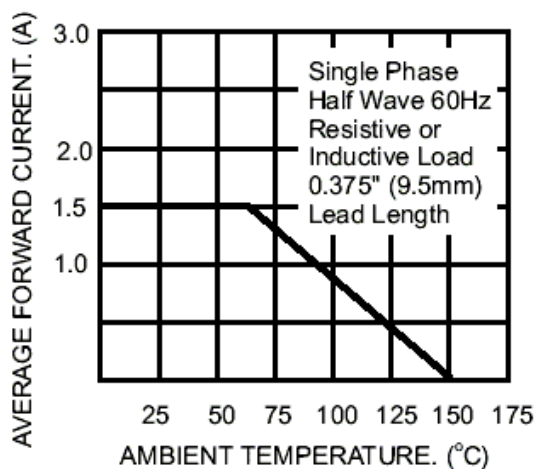


FIG.2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

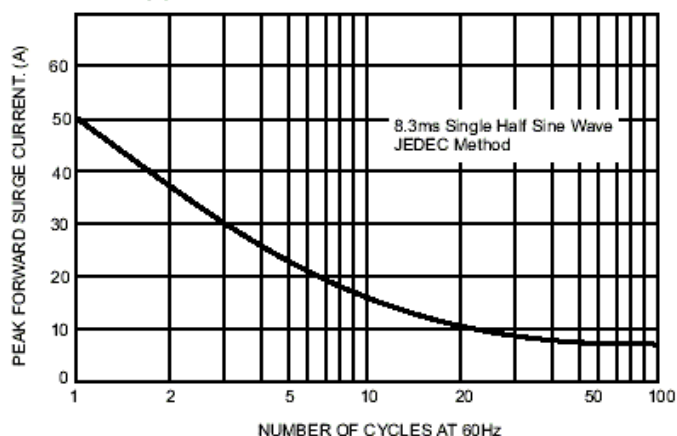


FIG.3- TYPICAL FORWARD CHARACTERISTICS

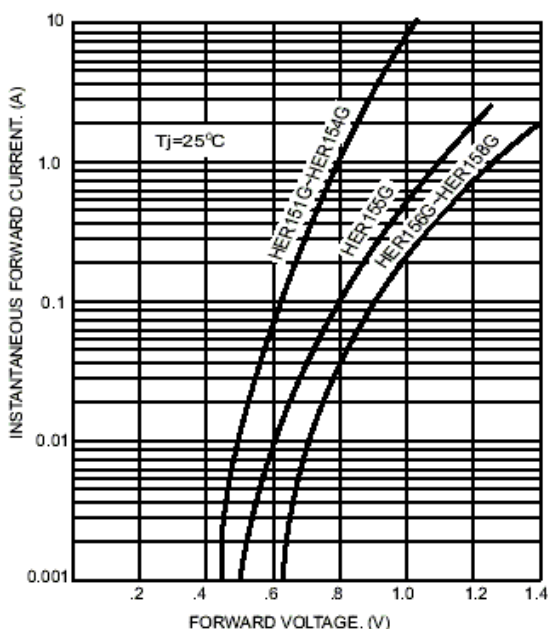


FIG.4- TYPICAL REVERSE CHARACTERISTICS

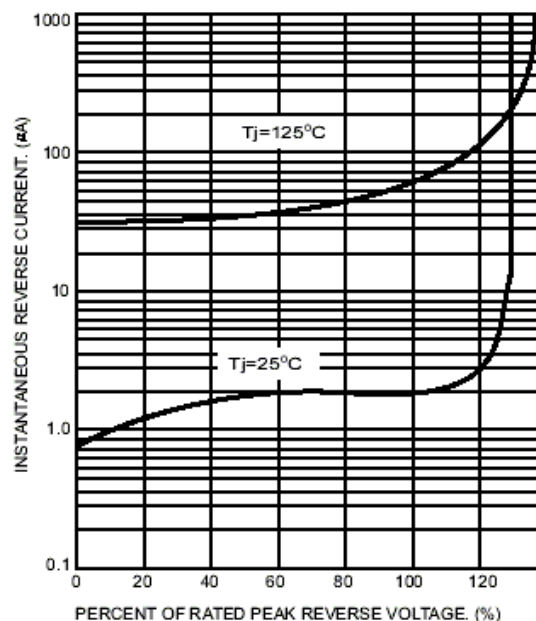


FIG.5- TYPICAL JUNCTION CAPACITANCE

