

HF7FD

SUBMINIATURE HIGH POWER RELAY



File No.:E134517



File No.: 40008374



File No.:CQC09002037921



Features

- 12A switching capability
- Ambient temperature meets 105°C
- High performance, Low profile
- Product in accordance to IEC 60335-1 available
- 2kV dielectric strength (between coil and contacts)
- UL94, V-0, CTI250 flammability class
- Double pins type available
- 1 Form A and 1 Form C configurations
- UL insulation system: Class F available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (22.0 x 16.0 x 16.4) mm

CONTACT DATA

Contact arrangement	1A	1C
Contact resistance	100mΩ max.(at 1A 24VDC)	
Contact material	AgSnO ₂ , AgCdO	
Contact rating (Res. load)	16A 250VAC 12A 250VAC 10A 250VAC	12A 125VAC NO: 10A 250VAC NC: 7A 250VAC
Max. switching voltage	250VAC / 28VDC	
Max. switching current	16A	10A
Max. switching power	4000VA / 280W	2500VA / 196W
Mechanical endurance	1 x 10 ⁷ OPS	
Electrical endurance (See approval reports for more details)	1A	Flux proofed / Plastic sealed: 1 x 10 ⁵ OPS
	1C	Flux proofed: 5x 10 ⁴ OPS Plastic sealed: NO: 5 x 10 ⁴ OPS NC: 1 x 10 ⁴ OPS

CHARACTERISTICS

Insulation resistance		100MΩ (at 500VDC)
Dielectric strength	Between coil & contacts	2000VAC 1min
	Between open contacts	750VAC 1min
Operate time (at nomi. volt.)		10ms max.
Release time (at nomi. volt.)		5ms max.
Humidity		5% to 85% RH
Shock resistance	Functional	98m/s ²
	Destructive	980m/s ²
Ambient temperature		HF7FD: -40°C to 85°C HF7FD-T: -40°C to 105°C
Vibration resistance		10Hz to 55Hz 1.5mm DA
Termination		PCB
Unit weight		Approx. 14g
Construction		Plastic sealed, Flux proofed

Notes: 1) The data shown above are initial values.
2) Please find coil temperature curve in the characteristic curves below.
3) UL insulation system: Class F, Class B.

COIL

Coil power	Approx. 360mW
------------	---------------

COIL DATA

at 23°C

Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Allowable Voltage VDC	Coil Resistance Ω
3	2.25	0.3	3.9	25 x (1±10%)
5	3.75	0.5	6.5	70 x (1±10%)
6	4.50	0.6	7.8	100 x (1±10%)
9	6.75	0.9	11.7	225 x (1±10%)
12	9.00	1.2	15.6	400 x (1±10%)
18	13.5	1.8	23.4	900 x (1±10%)
24	18.0	2.4	31.2	1600 x (1±15%)
48	36.0	4.8	62.4	6400 x (1±15%)

SAFETY APPROVAL RATINGS

UL/CUL	1 Form A	HF7FD	12A 250VAC (at 85°C, AgSnO ₂ , Double pin) 10A 277VAC 10A 28VDC
		HF7FD-T (AgSnO ₂)	16A 250VAC (at 40°C) 10A 250VAC (at 105°C) 8A 250VAC (at 105°C) 1/2HP 125VAC (at 40°C) 1/2HP 250VAC (at 40°C)
	1 Form C		12A 125VAC 7A 277VAC 7A 28VDC
	1 Form A		12A 250VAC (AgSnO ₂ , Double pin) 10A 250VAC
VDE	1 Form C		7A 250VAC

Notes: Only some typical ratings are listed above. If more details are required, please contact us.



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2012 Rev. 1.01

ORDERING INFORMATION

HF7FD / 012 -1H P S T G F (XXX)	
Type HF7FD: 85°C, HF7FD-T: 105°C	
Coil voltage 3, 5, 6, 9, 12, 18, 24, 48VDC	
Contact arrangement 1H: 1 Form A 1Z: 1 Form C	
Pin version P: Double pins type Nil: Single pin type	
Construction ¹⁾ S: Plastic sealed Nil: Flux proofed	
Contact material T: AgSnO ₂ Nil: AgCdO	
Contact plating G: Gold plated Nil: No gold plated	
Insulation standard F: Class F Nil: Class B	
Customer special code	

Notes: 1) Under the ambience with dangerous gas like H₂S, SO₂ or NO₂, plastic sealed type is recommended; Please test the relay in real applications.
If the ambience allows, flux proofed type is preferentially recommended.
If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.
2) If plastic sealed type is selected for cleaning purpose, the vent-hole cover should be excised after cleaning.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

Outline Dimensions


PCB Layout
(Bottom view)

Wiring Diagram
(Bottom View)

1 Form A (Single pin type)

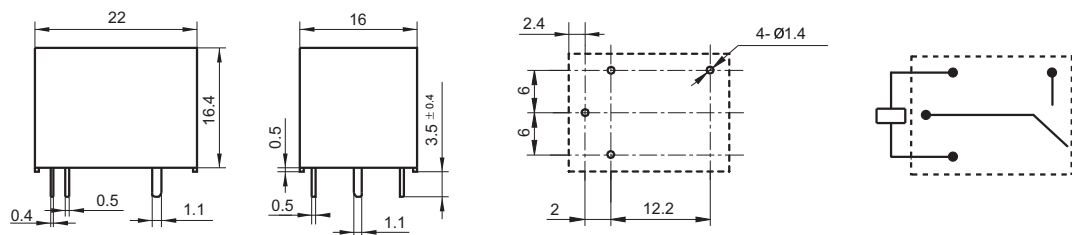

1 Form C (Single pin type)

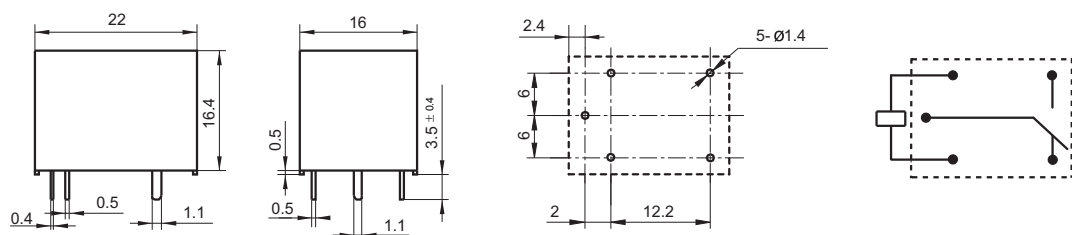

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Outline Dimensions



PCB Layout

(Bottom view)



Wiring Diagram

(Bottom View)

1 Form A (Double pins type)

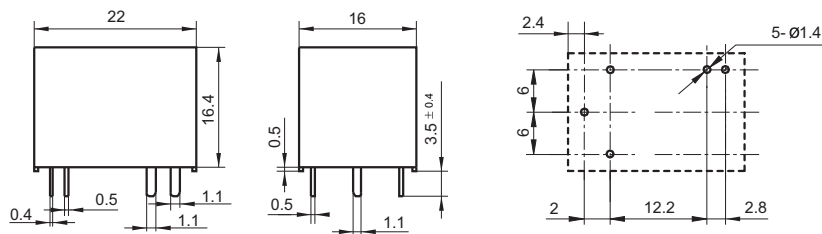


1 Form C (Double pins type)

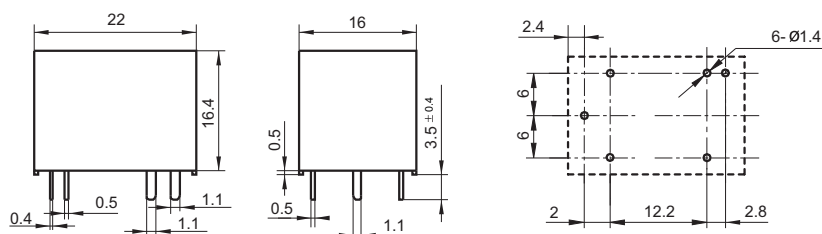


Remark: 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.
2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.

CHARACTERISTIC CURVES

MAXIMUM SWITCHING POWER

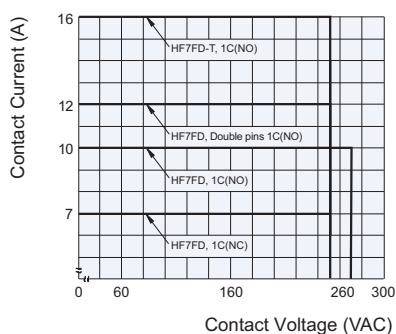

COIL TEMPERATURE RISE

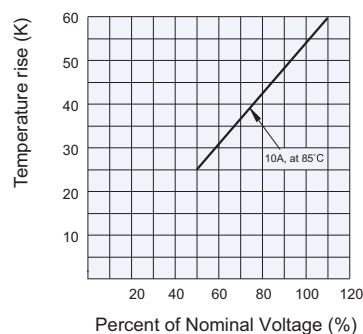

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.