

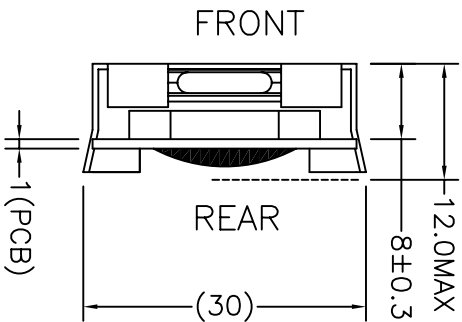


REV.	CHANGE CONTENT	BY	DATE

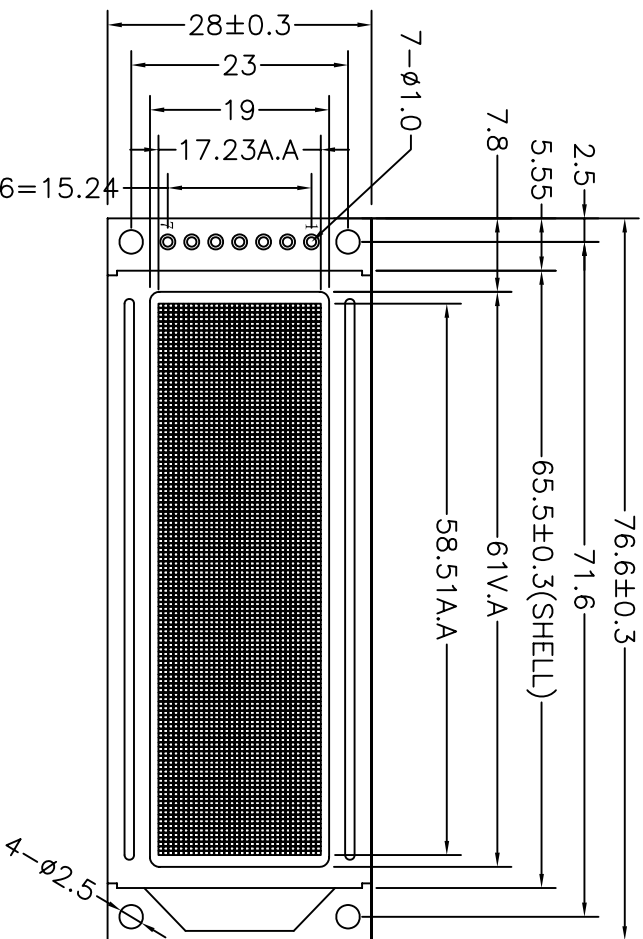

1	VSS
2	VDD
3	CS
4	SID
5	SCLK
6	/RST
7	LED+

NOTE:

1. DISPLAY TYPE: STN-BLUE-NEGATIVE-TRANSMISSIVE
2. DRIVE METHOD: 1/32 DUTY, 1/5 BIAS, 7.5V Vop(yp.), 5V VDD
3. VIEWING DIR.: 6:00
4. OP. TEMP.: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
5. ST. TEMP.: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
7. BACKLIGHT: LED(white), VLED=5.0V, If<30mA 50CD/m²
8. DRIVER IC: ST7920

TOLERANCE	HTDISPLAY CO., LTD.	DRAWING No. : HG1223209C-bT62L-VB
>0~6 ± 0.10	DESIGN	FILE NO.: 8
>6~80 ± 0.20	LI JINTANG	DRAWING TITLE: LCD MODULE
>80~240 ± 0.30	CHECKED	REV. : A
>240~400 ± 0.50	APPROVED	PROJECTION:
// 1 ϕ ± 0.10	Q.A	SCALE : -
		UNIT : MM
		SHEET : 1/2