



SUBMINIATURE POWER RELAYS

Single-Pole , 1A or 2Amp , PC Board

HM4100F
HM4101F


- UL / CUR File No.E170653
- Extremely low cost
- SPDT configuration
- Standard PC layout
- Sealed version available

CONTACT DATA

Type	HM4100F	HM4101F
Initial Contact Resistance Max. (at 1A 24VDC)	100mΩ	
Contact Material	Silver Alloy	
Contact Rating (Res. Load)	H:1A 120VAC/30VDC N&B:1A 240VAC/30VDC 2A 120VAC	
Max. switching voltage	300VAC/150VDC	
Max. switching current	2A	
Max. switching power	240VA/30W	
UL/CUR rating	H: 1A 125VAC/30VDC N & B: 1A 240VAC/30VDC 2A 125VAC	
Expected Mechanical	1X10 ⁷ OPS	
Life min. Electrical operations	1X10 ⁵ OPS	

COIL

Nominal coil power	H:200 mW;N: 360mW; B: 450 mW
--------------------	------------------------------

SPECIFICATION


Initial Insulation Resistance	1,000 MΩ 500VDC	
Dielectric Strength	500Vrms 1 minute	
Between coil and Contacts	500Vrms 1 minute	
Between open contacts	500Vrms 1 minute	
Surge Voltage between Contacts and coil	No	
Operate time (at nomi. Vot.)	10ms	
Release time (at nomi. Vot.)	5ms	
Temperature rise (at nominal voltage)	50°C	
Shock Resistance	Functional	98m/s ² (10g)
	Destructive	980m/s ² (100g)
Vibration Resistance	1.5mm 10 to 55Hz	
Humidity	35% to 85% RH	
Ambient temperature	-25°C to 70°C	
Termination	PC	
Unit weight	5g	
Construction	Sealed & Unsealed	

TABLE

Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. allowable Voltage (at 20 °C)	Coil Resistance Tolerance: ± 10%		
				H	N	B
3	2 . 3	0 . 3	3 . 6	4 5	2 5	2 0
5	3 . 8	0 . 5	6 . 0	1 2 0	7 0	5 6
6	4 . 5	0 . 6	7 . 2	1 8 0	1 0 0	8 0
9	6 . 8	0 . 9	1 0 . 8	4 0 0	2 2 0	1 8 0
1 2	9 . 0	1 . 2	1 4 . 4	7 0 0	4 0 0	3 2 0
2 4	1 8 . 0	2 . 4	2 8 . 8	2 8 0 0	1 6 0 0	1 2 8 0

HM4100F (HM4101F)	/	012	N	S
		Coil voltage	Nominal Coil Power	Structure
		3TO24VDC	H:200 mW N:360 mW B:450 mW	Nil: Unsealed S: Sealed

■OUTLINE DIMENSIONS , WIRING DIAGRAM AND PC BOARD LAYOUT

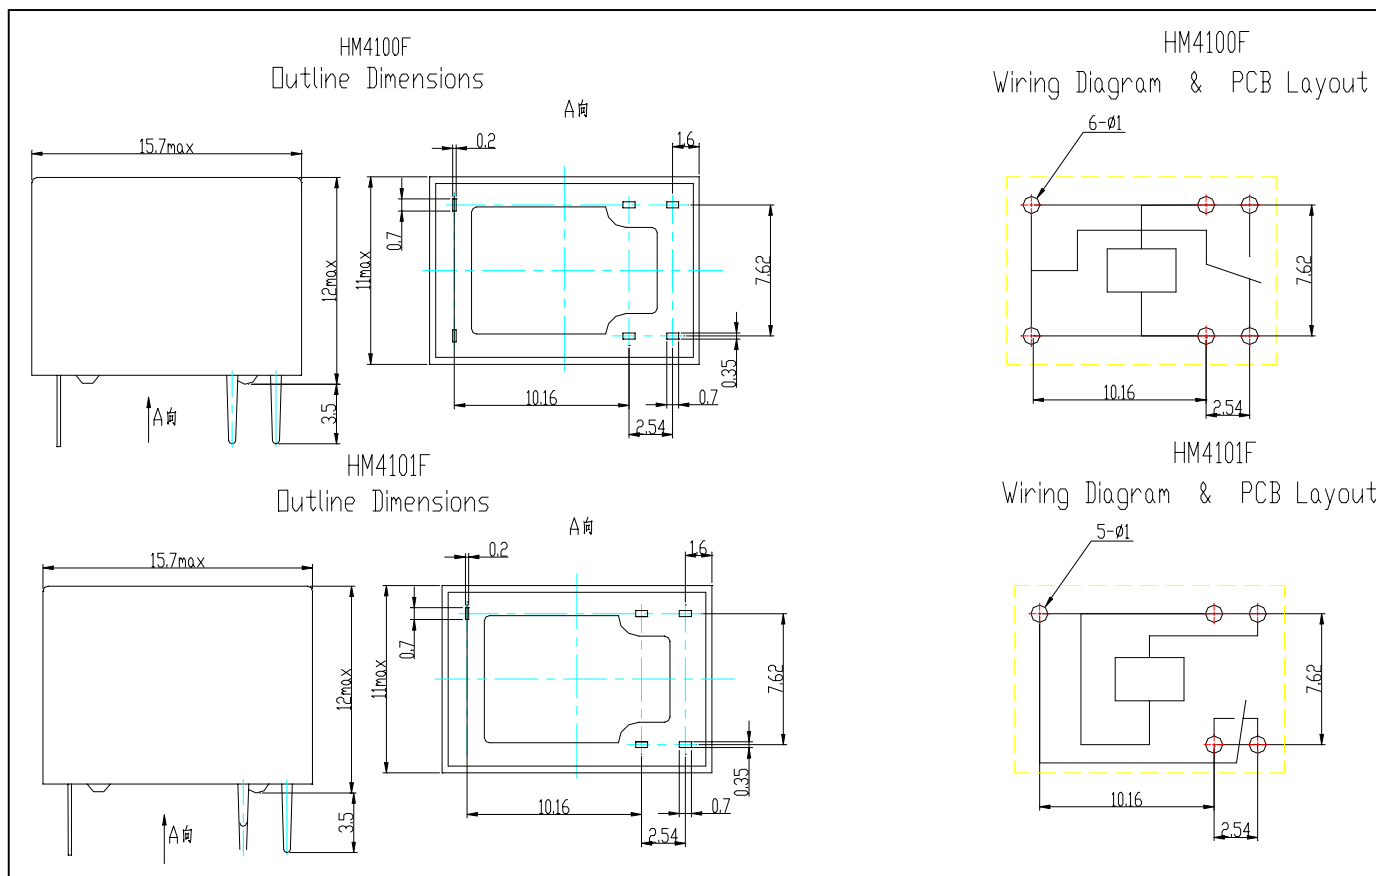

■USEFUL CURVES

