


# SMT Power Inductor


## HMU1056S Type

### Features

- RoHS compliant.
- Low profile, SMD type.
- High current.
- Magnetic shielded.
- High energy storage and low DCR.
- Provided with embossed carrier tape packing.
- Ideal for power source circuits, DC-DC converter, DC-AC inverters inductor applications.
- In addition to the standard versions shown here, customized inductors are available to meet your exact requirements.



### Mechanical Dimension :

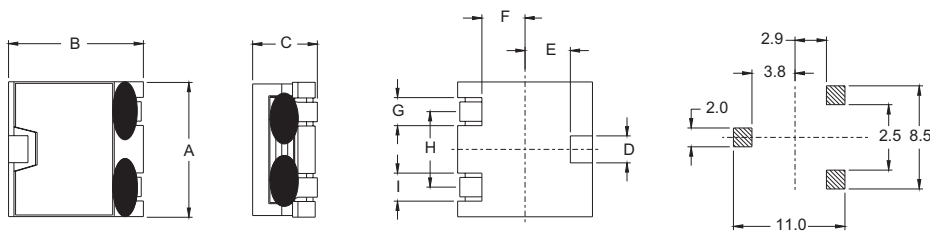

UNIT : mm/inch  
 A = 10.40 / 0.409 Max.  
 B = 10.40 / 0.409 Max.  
 C = 5.60 / 0.220 Max.  
 D = 1.40 / 0.055  
 E = 3.80 / 0.150  
 F = 2.90 / 0.114  
 G = 2.60 / 0.102  
 H = 5.50 / 0.217  
 I = 2.60 / 0.102

### Electrical Characteristics : At 25°C : 100KHz, 1V

PART NO.	L <sup>1</sup> (uH)	DCR (mΩ) MAX	I <sub>RATED</sub> <sup>2</sup> (A <sub>dc</sub> )
HMU1056S-R22	0.22	1.7	19.0
HMU1056S-R45	0.45	2.4	17.7
HMU1056S-0R8	0.80	4.1	13.0
HMU1056S-1R3	1.30	5.3	11.2
HMU1056S-1R8	1.80	7.5	9.0
HMU1056S-2R5	2.50	10.5	7.8
HMU1056S-3R2	3.20	12.4	7.4
HMU1056S-4R0	4.00	18.0	6.2
HMU1056S-5R0	5.00	23.8	4.9

1. Tolerance of inductance : 0.22 ~ 0.45uH ± 30%    0.80~5.00uH ± 20%
2. I<sub>RATED</sub> is the DC current which cause the inductance drop less than 35% (20% typical) of its nominal inductance without current and the surface temperature of the part increase less than 45°C.
3. Operating temperature : -20°C to 105°C ( including self-temperature rise ).



DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 252, SAN YING ROAD, KUEISAN INDUSTRIAL ZONE, TAOYUAN SHIEN, 333, TAIWAN, R.O.C.  
 TEL: 886-3-3591968; FAX: 886-3-3591991  
<http://www.deltaww.com>