



|                |                                       |          |       |
|----------------|---------------------------------------|----------|-------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 1/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0   |

TO : Road Well

Date : 2009/03/17

## Customer Acceptance Specification

Model : **HSD190MGW1**  
**-A04**

相關文件: IIS DC130-003911 / IIS DC130-003912

Accepted by:

Signature

Date

Proposed by: Technical Service Division

Signature

Date

Note:1. Please contact HannStar Display Corp. before designing your product based on this module specification.

2.The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by HannStar for any intellectual property claims or other problems that may result from application based on the module described herein.

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



|                |                                       |          |       |
|----------------|---------------------------------------|----------|-------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 2/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0   |

## Record of Revisions

| Rev. | Date          | Sub-Model | Description of change                               |
|------|---------------|-----------|---|
| 1.0  | Mar.,17, 2009 | A04       | Preliminary Product Specification was first issued. |

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



|                |                                       |          |       |
|----------------|---------------------------------------|----------|-------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 3/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0   |

## Contents

|      |                                     |      |
|------|-------------------------------------|------|
| 1.0  | General Descriptions .....          | p.4  |
| 2.0  | Absolute Maximum Ratings .....      | p.6  |
| 3.0  | Optical Characteristics .....       | p.8  |
| 4.0  | Block Diagram .....                 | p.12 |
| 5.0  | I/O Connection Pin Assignment ..... | p.15 |
| 6.0  | Electrical Characteristics .....    | p.17 |
| 7.0  | Outline Dimension .....             | p.22 |
| 8.0  | Lot Mark .....                      | p.25 |
| 9.0  | Package Specification .....         | p.26 |
| 10.0 | General Precaution .....            | p.27 |

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



|                |                                       |          |       |
|----------------|---------------------------------------|----------|-------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 4/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0   |

## 1.0 GENERAL DESCRIPTIONS

### 1.1 Introduction

HannStar Display model **HSD190MGW1-A04** is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, the voltage reference, common voltage, DC-DC converter, column, and row driver circuit. This TFT LCD has a 19-inch diagonally measured active display area with WXGA+ resolution (900 vertical by 1440 horizontal pixel array).

### 1.2 Features

- 19" WXGA+ TN(Twisted Nematic) mode TFT LCD panel
- High speed response time
- 4 CCFLs Backlight system
- Supported WXGA+ (V:900 lines, H:1440 pixels) resolution
- Supported to 75Hz refresh rate
- LCD Timing Controller
- RoHS compliance

### 1.3 General information

| Item                      | Specification                   |      | Unit   |
|---------------------------|---------------------------------|------|--------|
| Outline dimension         | 428×278×18.5 (typ.)             |      | mm     |
| Display area              | 408.24 (H) x255.15 (V)          |      | mm     |
| Number of Pixel           | 1440(H) x 900(V)                |      | Pixels |
| Pixel pitch               | 0.2835(H) x 0.2835(V)           |      | mm     |
| Pixel arrangement         | RGB Vertical stripe             |      |        |
| Display color             | 16.2M (6-bit+FRC)               |      |        |
| Display mode              | Normally white                  |      |        |
| Surface treatment         | Antiglare, Hard-Coating (3H)    |      |        |
| Weight                    | 2500                            |      | G      |
| Back-light                | 4-CCFLs, Top & bottom edge side |      |        |
| Input signal              | 2-ch LVDS                       |      |        |
| Power consumption         | Logic system                    | 3.75 | W      |
|                           | B/L system                      | 22   | W      |
| Optimum viewing direction | 6 o'clock                       |      |        |

### 1.4 Applications

- Desktop and Multi-function monitors
- Display terminals for AV applications
- Monitors for industrial applications

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



|                |                                       |          |       |
|----------------|---------------------------------------|----------|-------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 5/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0   |

### 1.5 Mechanical Information

| Item                          |               | Min.  | Typ.  | Max.  | Unit   |
|-------------------------------|---------------|-------|-------|-------|--------|
| Module Size                   | Horizontal(H) | 427.5 | 428.0 | 428.5 | mm     |
|                               | Vertical(V)   | 277.5 | 278.0 | 278.5 | mm     |
|                               | Depth(D)      | 18.0  | 18.5  | 19.0  | mm     |
| Weight (without inverter)     |               | 2300  | 2500  | 2700  | g      |
| Torque of customer screw hole |               | --    | --    | 3.0   | Kgf*Cm |

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.


|                |                                       |          |       |
|----------------|---------------------------------------|----------|-------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 6/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0   |

## 2.0 ABSOLUTE MAXIMUM RATINGS

### 2.1 Absolute Rating of Environment

| Item                        | Symbol            | Min. | Max. | Unit | Note |
|-----------------------------|-------------------|------|------|------|------|
| Storage temperature         | T <sub>STG</sub>  | -20  | 60   | °C   |      |
| Operating temperature       | T <sub>OPR</sub>  | 0    | 50   | °C   | (1)  |
| Vibration(non-operating)    | V <sub>NOP</sub>  | --   | 1.5  | G    | (2)  |
| Shock(non-operating)        | S <sub>NOP</sub>  | --   | 50   | G    | (3)  |
| Storage humidity            | H <sub>STG</sub>  | 10   | 90   | %RH  | (3)  |
| Operating humidity          | H <sub>OP</sub>   | 10   | 80   | %RH  | (4)  |
| Low pressure(operating)     | P <sub>LOP</sub>  | 697  | --   | HPa  | (5)  |
| Low pressure(non-operating) | P <sub>LNOP</sub> | 116  | --   | HPa  | (6)  |

Note (1)Storage /Operating temperature

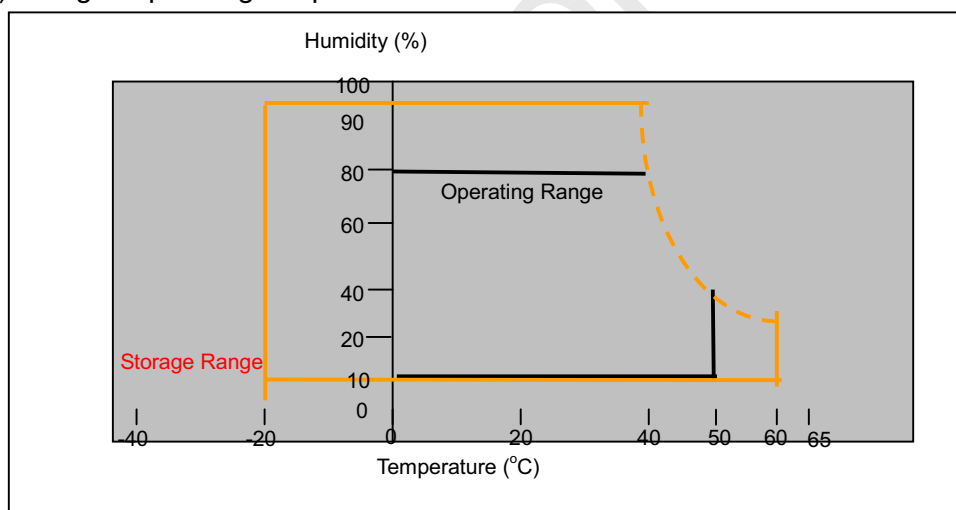

(2) 10-300Hz sine wave, X,Y,Z each directions, 10min/cycle.

(3) 11ms, ±X, ±Y, ±Z direction, one time each. For this shock test,

It is necessary to fill the silicon rubber between the shock jigs as buffer.

(4) Max wet bulb temp. =39°C

(5) 2 hrs. (10000 feet)

(6) 24hrs. (50000 feet)

|                |                                       |          |       |
|----------------|---------------------------------------|----------|-------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 7/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0   |

## 2.2 Electrical Absolute Rating:

### 2.2.1 TFT LCD Module:

| Item                 | Symbol | <u>Min.</u> | <u>Max.</u> | <u>Unit.</u> | <u>Note</u>   |
|----------------------|--------|-------------|-------------|--------------|---------------|
| Power supply Voltage | VDD    | <u>-0.3</u> | <u>6.0</u>  | <u>V(DC)</u> | <u>(1)(2)</u> |

### 2.2.2 Back Light Unit:

| Item           | Symbol | Min. | Max. | Unit | Note      |
|----------------|--------|------|------|------|-----------|
| Lamp current   | $I_L$  | 3.0  | 9.0  | MA   | (1)(2)(3) |
| Lamp frequency | $f_L$  | 45   | 80   | KHz  | (1)(2)(3) |

Note: (1) Permanent damage may occur to the LCD module if beyond this specification.

Functional operation should be restricted to the conditions described under Normal Operating Conditions.

(2) To exceed 6.5mA, life time accelerate drop down and if to exceed 9.0mA has safety problem. If current lower than 3.5 mA, CCFL would be unstable or damaged.

(3) Within  $T_a=25\pm2^{\circ}\text{C}$



|                |                                       |          |       |
|----------------|---------------------------------------|----------|-------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 8/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0   |

### 3.0 OPTICAL CHARACTERISTICS

#### 3.1 Optical specification

| Item                                  |         | Symbol           | Condition  | Min.  | Typ.  | Max.  | Unit              | Note                    |
|---------------------------------------|---------|------------------|--|-------|-------|-------|-------------------|-------------------------|
| Contrast                              |         | CR               | $\Theta=0^{\circ}$<br>$\phi=0^{\circ}$<br>Normal viewing angle | 450   | 700   | --    |                   | (1)(2)                  |
| Response time                         | Rising  | TR               |  | --    | 1.5   | 3     | msec              | (1)(3)                  |
|                                       | Falling | TF               |  | --    | 3.5   | 7     |                   |                         |
| White luminance<br>(center of screen) |         | $Y_L$            |  | 240   | 300   | --    | cd/m <sup>2</sup> | (1)(4)(7)<br>(IL=6.5mA) |
| Color chromaticity<br>(CIE1931)       | Red     | R <sub>x</sub>   |  | -0.03 | 0.650 | +0.03 |                   | (1)(5)                  |
|                                       |         | R <sub>y</sub>   |  |       | 0.325 |       |                   |                         |
|                                       | Green   | G <sub>x</sub>   |  |       | 0.300 |       |                   |                         |
|                                       |         | G <sub>y</sub>   |  |       | 0.615 |       |                   |                         |
|                                       | Blue    | B <sub>x</sub>   |  |       | 0.145 |       |                   |                         |
|                                       |         | B <sub>y</sub>   |  |       | 0.080 |       |                   |                         |
|                                       | White   | W <sub>x</sub>   | 0.310  |       |       |       |                   |                         |
|                                       |         | W <sub>y</sub>   | 0.330  |       |       |       |                   |                         |
| Viewing angle                         | Hor.    | $\Theta_L$       | CR>10  | 65    | 75    | --    |                   |                         |
|                                       |         | $\Theta_R$       |  | 65    | 75    | --    |                   |                         |
|                                       | Ver.    | $\Theta_H$       |  | 65    | 75    | --    |                   |                         |
|                                       |         | $\Theta_L$       |  | 55    | 65    | --    |                   |                         |
| Viewing angle                         | Hor.    | $\Theta_L$       | CR>5   | 75    | 85    | --    |                   |                         |
|                                       |         | $\Theta_R$       |  | 75    | 85    | --    |                   |                         |
|                                       | Ver.    | $\Theta_H$       |  | 75    | 85    | --    |                   |                         |
|                                       |         | $\Theta_L$       |  | 65    | 75    | --    |                   |                         |
| Brightness uniformity                 |         | B <sub>UNI</sub> | $\Theta=0^{\circ}$<br>$\phi=0^{\circ}$                         | 75    | --    | --    | %                 | (6)                     |

#### 3.2 Measuring Condition

- Measuring surrounding: dark room
- Lamp current  $I_{BL}$ : 6.5 mA, lamp freq.  $F_L$ = 50KHz, Inverter: TDK TBD332LR
- $V_{DD1}$ =5.0V,  $f_V$ =60Hz,  $f_{DCLK}$ =53.25MHz
- Surrounding temperature: 25±2°C
- 30min. Warm-up time.

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.




|                |                                       |          |       |
|----------------|---------------------------------------|----------|-------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 9/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0   |

### 3.3 Measuring Equipment

- FPM520 of Westar Display technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics.
- Measuring spot size : 20~21mm

Note (1) Definition of Viewing Angle:

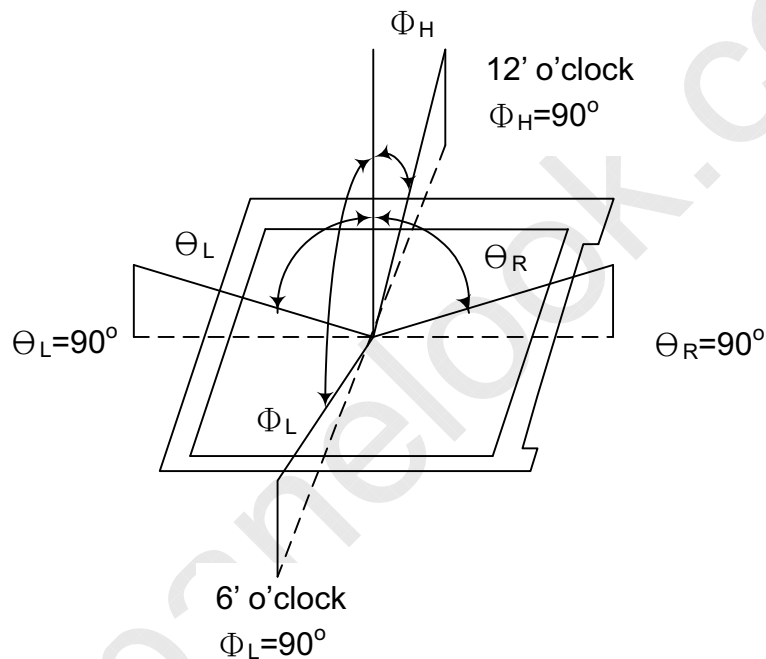


Note (2) Definition of Contrast Ratio(CR) :  
measured at the center point of panel


$$CR = \frac{\text{Luminance with all pixels white (L255)}}{\text{Luminance with all pixels black (L0)}}$$

|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 10/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

Note (3) Definition of Response Time: Sum of  $T_R$  and  $T_F$

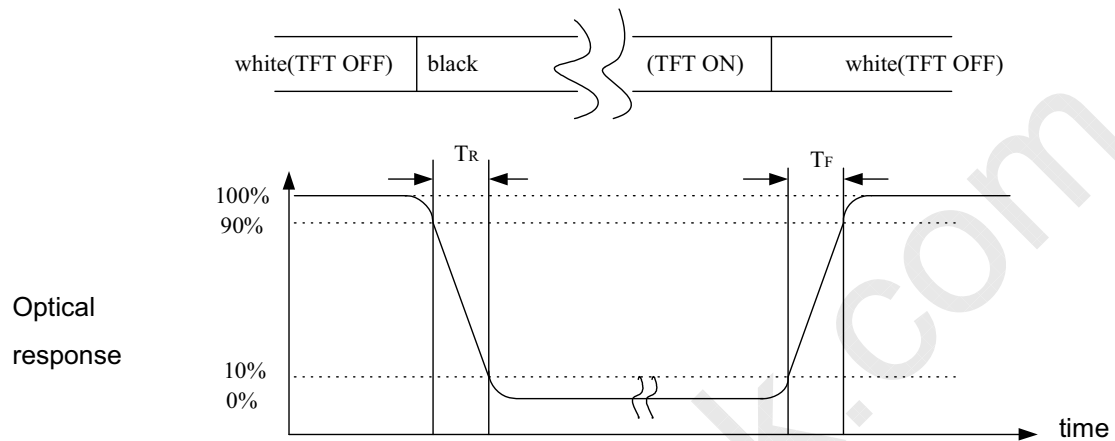

Note (4) Optical characteristic measurement setup

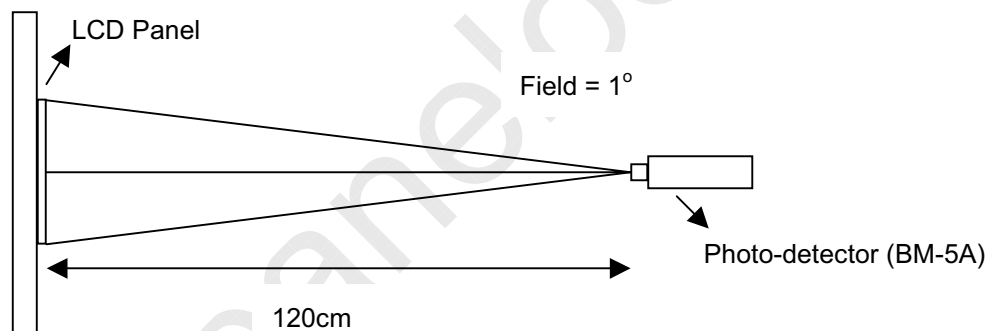




|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 11/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

Note (5) Definition of Center Luminance of White

Center Luminance= Y1

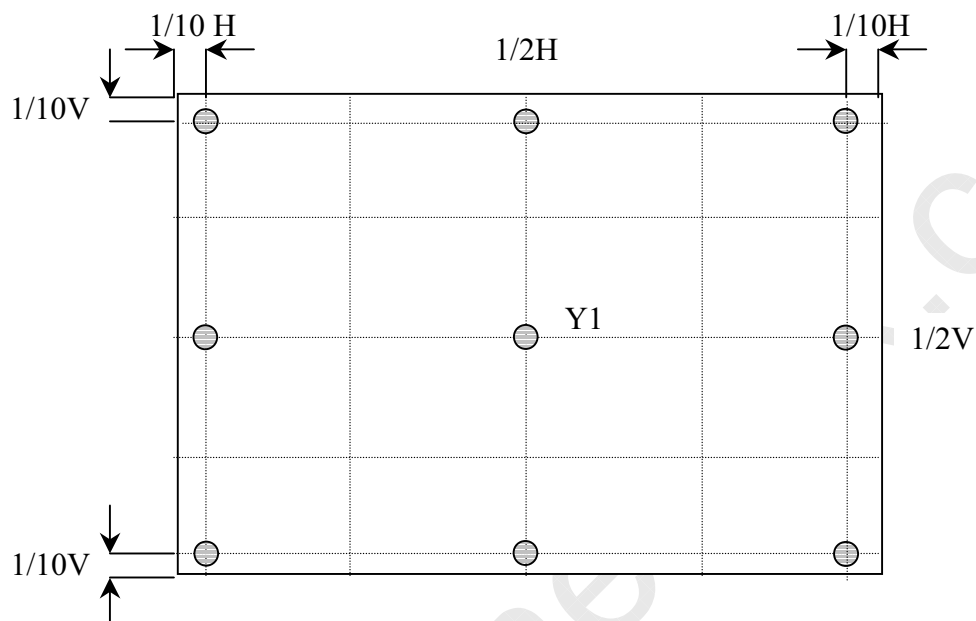

Note (6) Definition of brightness uniformity


$$\text{Luminance uniformity} = \frac{(\text{Min Luminance of 9 points})}{(\text{Max Luminance of 9 points})} \times 100\%$$

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 12/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

## 4.0 BLOCK DIAGRAM

### 4.1 LCD Module Block Diagram:

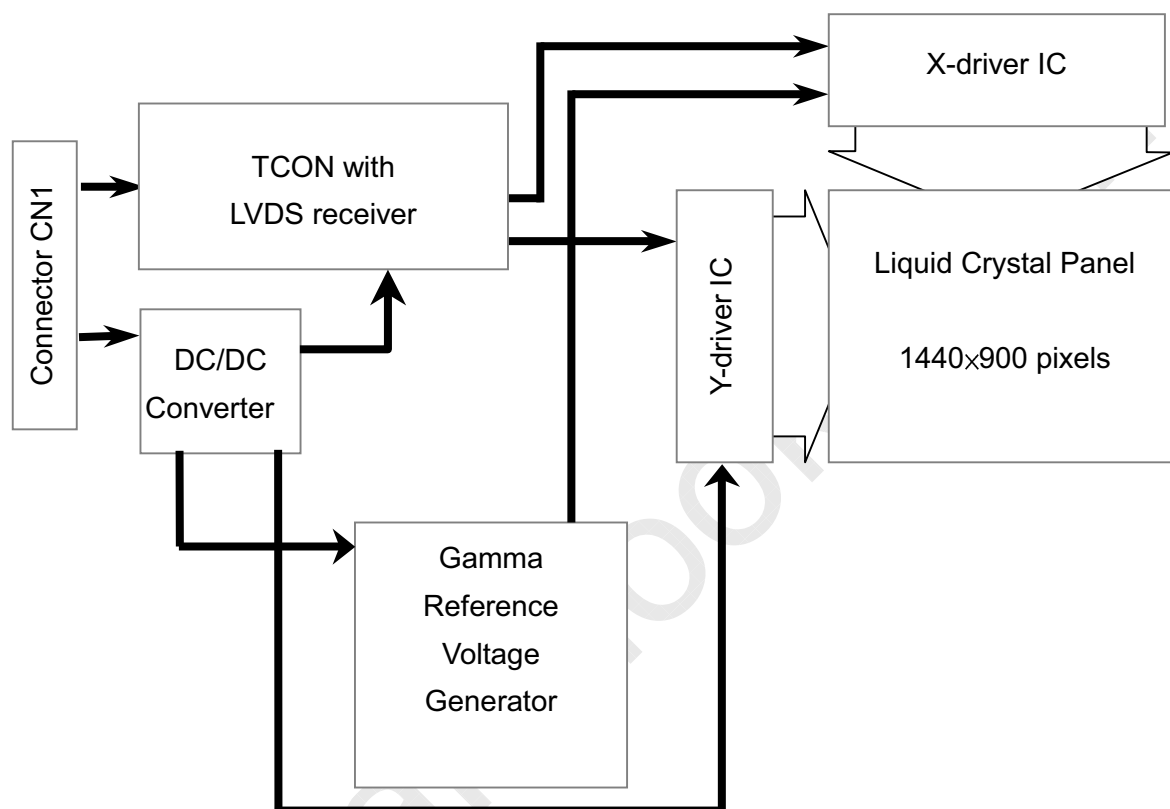


The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.




|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 13/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

## 4.2 Back Light Unit

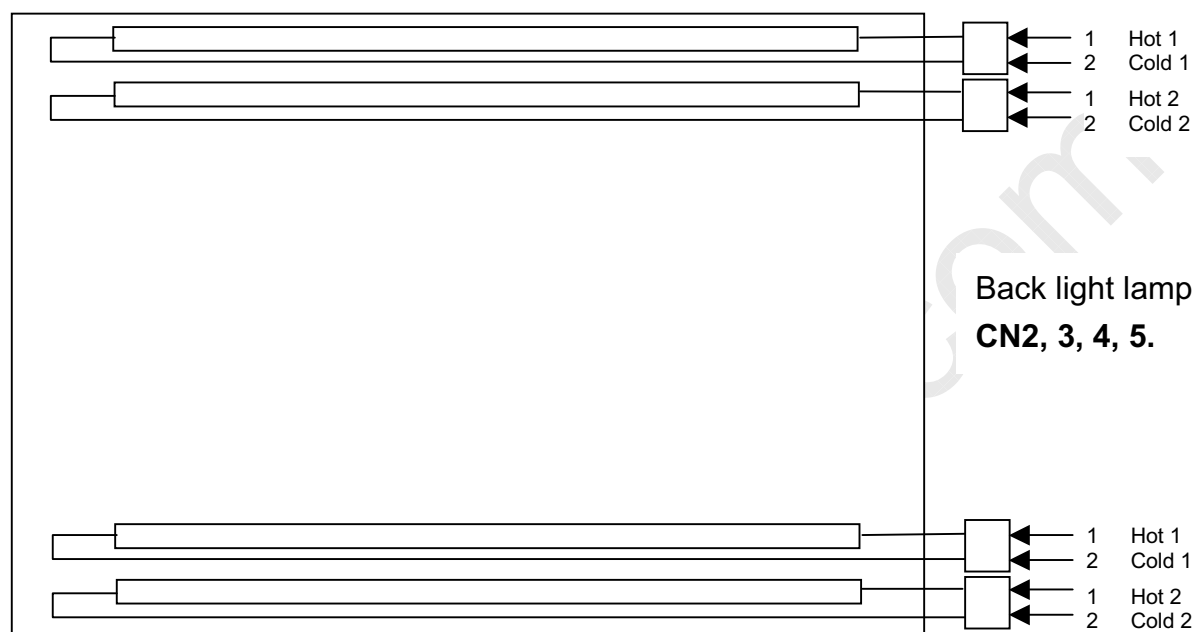

## 4.3 Pixel Format

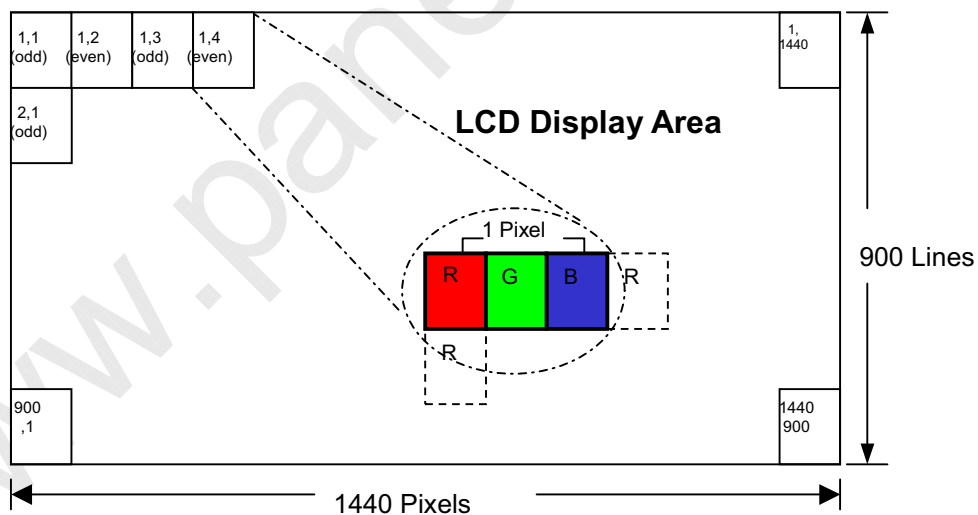

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 14/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

#### 4.4 Relationship Between Displayed Color and Input

|                                   | Display                 | MSB                      LSB |    |    |    |    |    |    |    | MSB                      LSB |    |    |    |    |    |    |    | MSB                      LSB |    |    |    |    |    |    |    | Gray scale<br>Level |
|-----------------------------------|-------------------------|------------------------------|----|----|----|----|----|----|----|------------------------------|----|----|----|----|----|----|----|------------------------------|----|----|----|----|----|----|----|---------------------|
|                                   |                         | R7                           | R6 | R5 | R4 | R3 | R2 | R1 | R0 | G7                           | G6 | G5 | G4 | G3 | G2 | G1 | G0 | B7                           | B6 | B5 | B4 | B3 | B2 | B1 | B0 |                     |
| Basic<br>color                    | Black                   | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | -                   |
|                                   | Blue                    | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | H                            | H  | H  | H  | H  | H  | H  | H  | -                   |
|                                   | Green                   | L                            | L  | L  | L  | L  | L  | L  | L  | H                            | H  | H  | H  | H  | H  | H  | H  | L                            | L  | L  | L  | L  | L  | L  | L  | -                   |
|                                   | Light Blue              | L                            | L  | L  | L  | L  | L  | L  | L  | H                            | H  | H  | H  | H  | H  | H  | H  | H                            | H  | H  | H  | H  | H  | H  | H  | -                   |
|                                   | Red                     | H                            | H  | H  | H  | H  | H  | H  | H  | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | -                   |
|                                   | Purple                  | H                            | H  | H  | H  | H  | H  | H  | H  | L                            | L  | L  | L  | L  | L  | L  | L  | H                            | H  | H  | H  | H  | H  | H  | H  | -                   |
|                                   | Yellow                  | H                            | H  | H  | H  | H  | H  | H  | H  | H                            | H  | H  | H  | H  | H  | H  | H  | L                            | L  | L  | L  | L  | L  | L  | L  | -                   |
|                                   | White                   | H                            | H  | H  | H  | H  | H  | H  | H  | H                            | H  | H  | H  | H  | H  | H  | H  | H                            | H  | H  | H  | H  | H  | H  | H  | -                   |
| Gray scale<br>of Red              | Black                   | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L0                  |
|                                   | Dark<br>↑<br>↓<br>Light | L                            | L  | L  | L  | L  | L  | L  | H  | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L1                  |
|                                   |                         | L                            | L  | L  | L  | L  | L  | H  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L2                  |
|                                   |                         | :                            |    |    |    |    |    |    |    | :                            |    |    |    |    |    |    |    | :                            |    |    |    |    |    |    |    | L3...L251           |
|                                   |                         | H                            | H  | H  | H  | H  | H  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L255                |
|                                   |                         | H                            | H  | H  | H  | H  | H  | L  | H  | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L255                |
|                                   |                         | H                            | H  | H  | H  | H  | H  | H  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L255                |
|                                   | Red                     | H                            | H  | H  | H  | H  | H  | H  | H  | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | Red L255            |
| Gray scale<br>of Green            | Black                   | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L0                  |
|                                   | Dark<br>↑<br>↓<br>Light | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | H  | L                            | L  | L  | L  | L  | L  | L  | L  | L1                  |
|                                   |                         | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | H  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L2                  |
|                                   |                         | :                            |    |    |    |    |    |    |    | :                            |    |    |    |    |    |    |    | :                            |    |    |    |    |    |    |    | L3...L251           |
|                                   |                         | L                            | L  | L  | L  | L  | L  | L  | L  | H                            | H  | H  | H  | H  | H  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L255                |
|                                   |                         | L                            | L  | L  | L  | L  | L  | L  | L  | H                            | H  | H  | H  | H  | H  | L  | H  | L                            | L  | L  | L  | L  | L  | L  | L  | L255                |
|                                   |                         | L                            | L  | L  | L  | L  | L  | L  | L  | H                            | H  | H  | H  | H  | H  | H  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L255                |
|                                   | Green                   | L                            | L  | L  | L  | L  | L  | L  | L  | H                            | H  | H  | H  | H  | H  | H  | H  | L                            | L  | L  | L  | L  | L  | L  | L  | Green L255          |
| Gray scale<br>of Blue             | Black                   | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L0                  |
|                                   | Dark<br>↑<br>↓<br>Light | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | H  | L  | L1                  |
|                                   |                         | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | H  | L  | L  | L2                  |
|                                   |                         | :                            |    |    |    |    |    |    |    | :                            |    |    |    |    |    |    |    | :                            |    |    |    |    |    |    |    | L3...L251           |
|                                   |                         | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | H                            | H  | H  | H  | H  | H  | L  | L  | L255                |
|                                   |                         | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | H                            | H  | H  | H  | H  | H  | L  | H  | L255                |
|                                   |                         | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | H                            | H  | H  | H  | H  | H  | L  | L  | L255                |
|                                   | Blue                    | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | H                            | H  | H  | H  | H  | H  | H  | H  | Blue L255           |
| Gray scale<br>of White &<br>Black | Black                   | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L                            | L  | L  | L  | L  | L  | L  | L  | L0                  |
|                                   | Dark<br>↑<br>↓<br>Light | L                            | L  | L  | L  | L  | L  | L  | H  | L                            | L  | L  | L  | L  | L  | L  | H  | L                            | L  | L  | L  | L  | L  | L  | H  | L1                  |
|                                   |                         | L                            | L  | L  | L  | L  | L  | H  | L  | L                            | L  | L  | L  | L  | H  | L  | L  | L                            | L  | L  | L  | L  | H  | L  | L  | L2                  |
|                                   |                         | :                            |    |    |    |    |    |    |    | :                            |    |    |    |    |    |    |    | :                            |    |    |    |    |    |    |    | L3...L251           |
|                                   |                         | H                            | H  | H  | H  | H  | H  | L  | L  | H                            | H  | H  | H  | H  | H  | L  | L  | H                            | H  | H  | H  | H  | H  | L  | L  | L252                |
|                                   |                         | H                            | H  | H  | H  | H  | H  | L  | H  | H                            | H  | H  | H  | H  | L  | H  | H  | H                            | H  | H  | H  | H  | L  | H  | H  | L253                |
|                                   |                         | H                            | H  | H  | H  | H  | H  | H  | L  | H                            | H  | H  | H  | H  | H  | L  | H  | H                            | H  | H  | H  | H  | H  | L  | H  | L254                |
|                                   | White                   | H                            | H  | H  | H  | H  | H  | H  | H  | H                            | H  | H  | H  | H  | H  | H  | H  | H                            | H  | H  | H  | H  | H  | H  | H  | White L255          |

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 15/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

## 5.0 I/O CONNECTION PIN ASSIGNMENT

### 5.1 Interface Connector (30-pins ) (JAE: FI-XB30SSRL-HF16 or equivalent)

| Pin No. | Signal | Description                |
|---------|--------|----------------------------|
| 1       | RinO0- | Receiver Signal (-)        |
| 2       | RinO0+ | Receiver Signal (+)        |
| 3       | RinO1- | Receiver Signal (-)        |
| 4       | RinO1+ | Receiver Signal (+)        |
| 5       | RinO2- | Receiver Signal (-)        |
| 6       | RinO2+ | Receiver Signal (+)        |
| 7       | VSS    | Ground                     |
| 8       | RinOC- | Clock Signal (-)           |
| 9       | RinOC+ | Clock Signal (+)           |
| 10      | RinO3- | Receiver Signal (-)        |
| 11      | RinO3+ | Receiver Signal (+)        |
| 12      | RinE0- | Receiver Signal (-)        |
| 13      | RinE0+ | Receiver Signal (+)        |
| 14      | VSS    | Receiver Signal (+)        |
| 15      | RinE1- | Receiver Signal (-)        |
| 16      | RinE1+ | Receiver Signal (+)        |
| 17      | VSS    | Ground                     |
| 18      | RinE2- | Receiver Signal (-)        |
| 19      | RinE2+ | Receiver Signal (+)        |
| 20      | RinEC- | Clock Signal (-)           |
| 21      | RinEC+ | Clock Signal (+)           |
| 22      | RinE3- | Receiver Signal (-)        |
| 23      | RinE3+ | Receiver Signal (+)        |
| 24      | VSS    | Ground                     |
| 25      | NC     | NC                         |
| 26      | NC     | NC                         |
| 27      | NC     | NC                         |
| 28      | VDD+5V | Power Supply, 5V (Typical) |
| 29      | VDD+5V | Power Supply, 5V (Typical) |
| 30      | VDD+5V | Power Supply, 5V (Typical) |

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 16/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

## 5.2 Back Light Unit (CCFL) Connectors:

**CN2, 3, 4, 5:** CCFL Power Source (Yeonho 35001H5-02 or equivalent)

| Pin No. | Symbol | Color | Function                         |
|---------|--------|-------|----------------------------------|
| 1       | Hot1   | Pink  | CCFL power supply (High voltage) |
| 2       | Cold1  | White | Ground                           |

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 17/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |


## 6.0 ELECTRICAL CHARACTERISTICS

### 6.1 TFT LCD Module:

| Item                    | Symbol     | Min.   | Typ.  | Max.   | Unit | Note |
|-------------------------|------------|--------|-------|--------|------|------|
| Voltage of power supply | $V_{DD}$   | 4.5    | 5.0   | 5.5    | V    |      |
| Current of power supply | $I_{DD}$   | 650    | 750   | 850    | mA   | (1)  |
| Vsync frequency         | $f_V$      | 60     | 60    | 75     | Hz   | (2)  |
| Hsync frequency         | $f_H$      | 55.5   | 59.9  | 75     | KHz  |      |
| Frequency               | $f_{DCLK}$ | 44.375 | 53.25 | 68.375 | MHz  |      |
| Input rush current      | $I_{RUSH}$ | ---    | ---   | 1.5    | A    | (3)  |

Note (1)

Mosaic: 2 Dot checker image

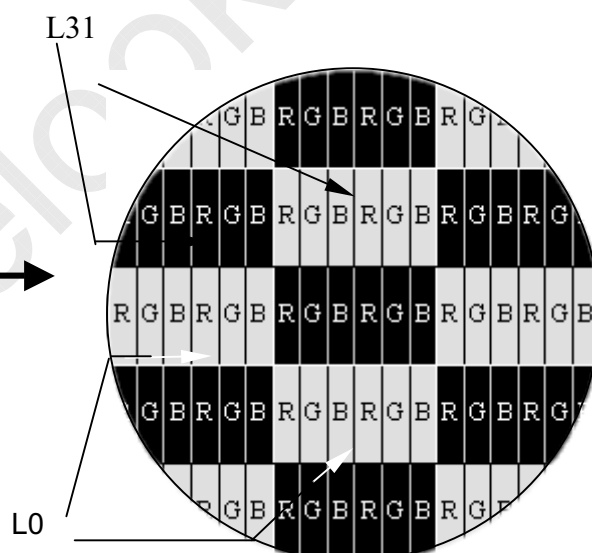


Grey scale:L0~L255

L0: Luminance with all pixels black.

L255: Luminance with all pixels white.

Note (2) When  $f_v$  is too low, a flicker may be occurred on the display.

Note (3) Input Rush Current condition

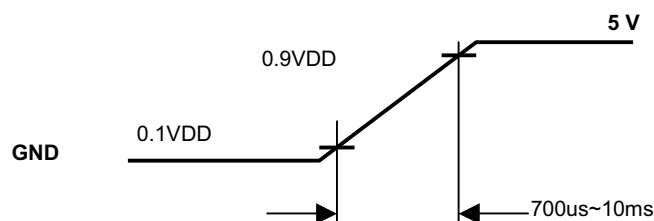


The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 18/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

## 6.2 Back-Light Unit

The back-light system is an direct-lighting type with 4CCFLs (Cold Cathode Fluorescent Lamp). The characteristics of the lamp are shown in the following tables.

| Item               | Symbol | Min.   | Typ. | Max. | Unit    | Note               |
|--------------------|--------|--------|------|------|---------|--------------------|
| Lamp current       | IL     | 3.0    | 6.5  | 9.0  | mA(rms) | (1)                |
| Lamp voltage       | VL     | 612    | 680  | 748  | V(rms)  | $I_L=6.5\text{mA}$ |
| Frequency          | fL     | 40     | 50   | 80   | KHz     | (2)                |
| Operating Lifetime | Hr     | 50,000 | --   | --   | Hour    | 6.5mA(3)           |
|                    | Hr     | 40,000 | --   | --   | Hour    | 7.5mA(3)           |
| Startup voltage    | Vs     | 1,450  | --   | --   | V(rms)  | at 25°C            |
|                    |        | 1,700  |      |      |         | at 0°C             |

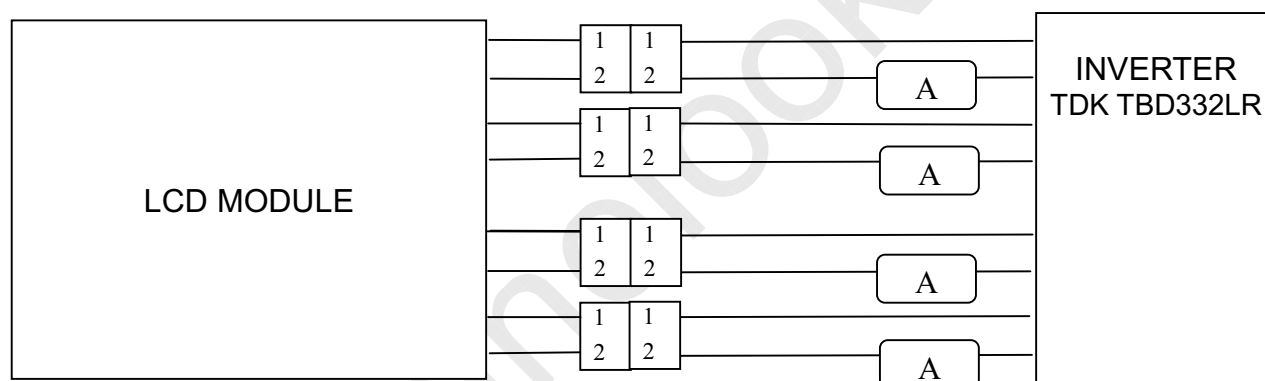

### Note (1)

Lamp current is measured with current meter for high frequency as shown below. Specified values are for a single lamp. To exceed 6.5 mA, life time accelerate drop down and if to exceed 9.0 mA has safety problem. If current lower than 3.5 mA, CCFL would be unstable or damaged.

### Note (2)

Lamp frequency may produce interference with horizontal synchronous frequency and this may cause ripple noise on the display. Therefore lamp frequency shall be kept away from the horizontal synchronous frequency and its harmonics as far as possible in order to avoid interference.

### Note (3)

Lamp life time (Hr) can be defined as the time in which it continues to operate under the condition :  $T_a=25\pm3^\circ\text{C}$ , Typical  $I_L$  value indicated in the above table and  $f_L=48\text{ kHz}$  until the brightness becomes less than 50%

|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 19/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

**Note (4)**

CCFL inverter should be able to provide a voltage over specified value (Vs) in the above table. Lamp units need at least Vs value shown above to ignition.


**Note (5)**

The voltage over specified value (Vs) should be applied to the lamp more than 1 second after startup. Otherwise, the lamp may not be turned on. The used lamp current is the lamp typical current.

**Note (6)**

The output voltage waveform and current waveform of the inverter must be symmetrical (Unsymmetrical ratio is less than 10%). Please do not use the inverter which has unsymmetrical voltage and current waveform, and spike waveform. The inverter design which can provide the best optical performance, power efficiency, and lamp life should under the following conditions.

- The asymmetry rate of the inverter waveform should be less than 10%.
- The distortion rate of the waveform should be within  $\sqrt{2} \pm 10\%$ .
- The inverter output waveform should be better similar to the ideal sine wave.

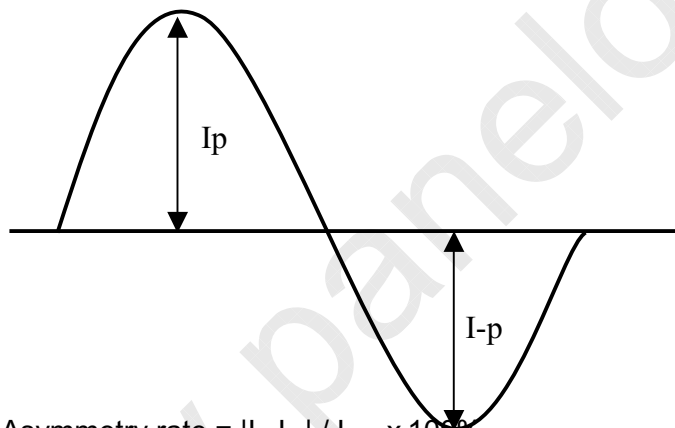

$$\text{Asymmetry rate} = |I_p - I-p| / I_{rms} \times 100\%$$

$$\text{Distortion rate} = I_p \text{ (or } I-p) / I_{rms}$$


|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 20/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

### 6.3 Interface Timing ( DE mode)


| Item                     | Symbol | Min.   | Typ.  | Max.   | Unit  |
|--------------------------|--------|--------|-------|--------|-------|
| Frame Rate               | --     | 56     | 60    | 75     | Hz    |
| Frame Period             | t1     | 910    | 934   | 1050   | line  |
| Vertical Display Time    | t2     | 900    | 900   | 900    | line  |
| Vertical Blanking Time   | t3     | 10     | 34    | 150    | line  |
| 1 Line Scanning Time     | t4     | 800    | 952   | 968    | clock |
| Horizontal Display Time  | t5     | 720    | 720   | 720    | clock |
| Horizontal Blanking Time | t6     | 60     | 232   | 248    | clock |
| Clock Rate               | t7     | 44.375 | 53.25 | 68.375 | MHz   |

#### Timing Diagram of Interface Signal (DE mode)

##### (1)Vertical

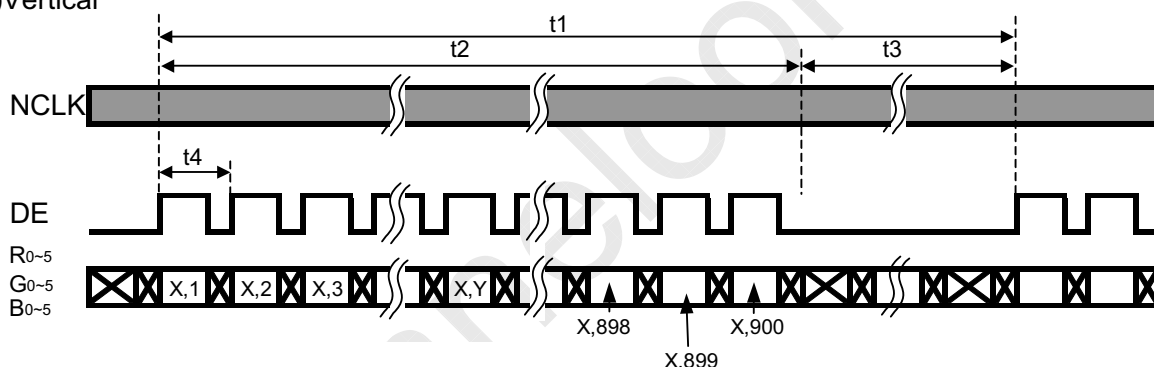


##### (2)Horizontal

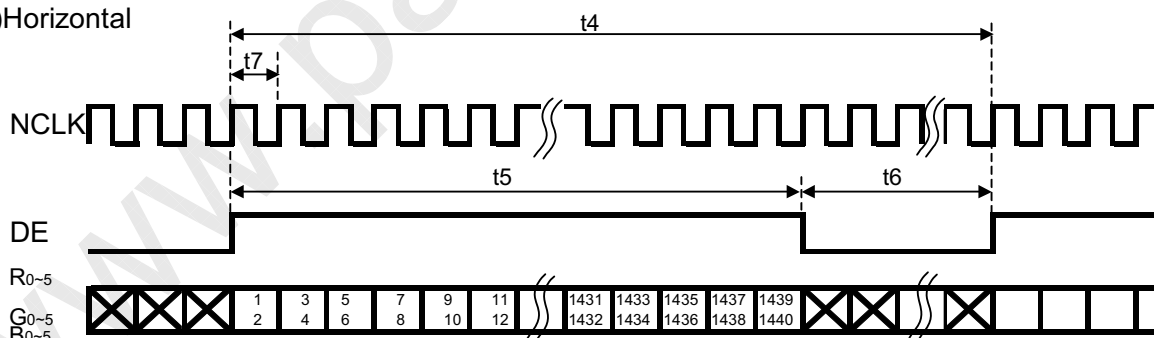

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 21/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

#### 6.4 Power On / Off Sequence :

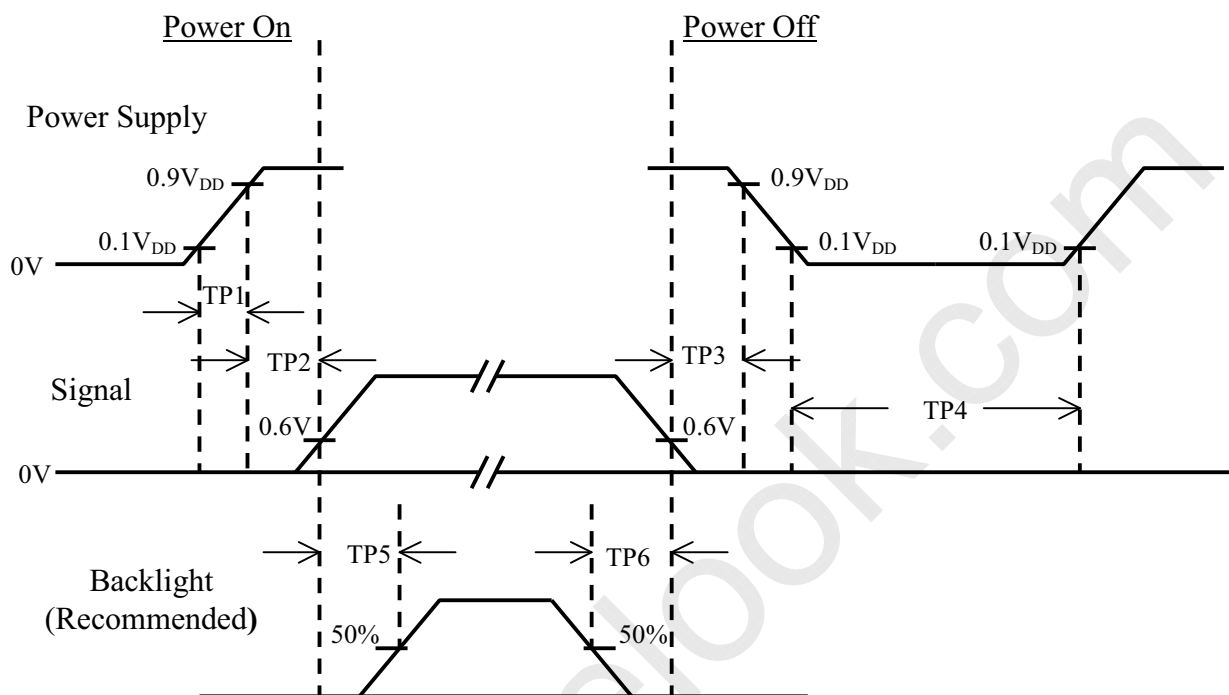

| Item | Min. | Typ. | Max. | Unit | Remark |
|------|------|------|------|------|--------|
| TP1  | 0.5  | --   | 10   | msec |        |
| TP2  | 0    | --   | 50   | msec |        |
| TP3  | 0    | --   | 50   | msec |        |
| TP4  | 500  | --   | --   | msec |        |
| TP5  | 200  | --   | --   | msec |        |
| TP6  | 200  | --   | --   | msec |        |

Note : (1) The supply voltage of the external system for the module input should be the same as the definition of V<sub>DD</sub>.

(2) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become white.

(3) In case of V<sub>DD</sub> = off level, please keep the level of input signal on the low or keep a high impedance.


(4) TP4 should be measured after the module has been fully discharged between power off and on period.

(5) Interface signal shall not be kept at high impedance when the power is on.






|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 23/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

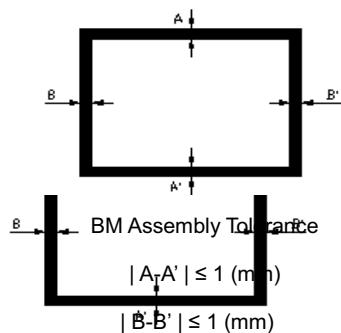

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 24/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

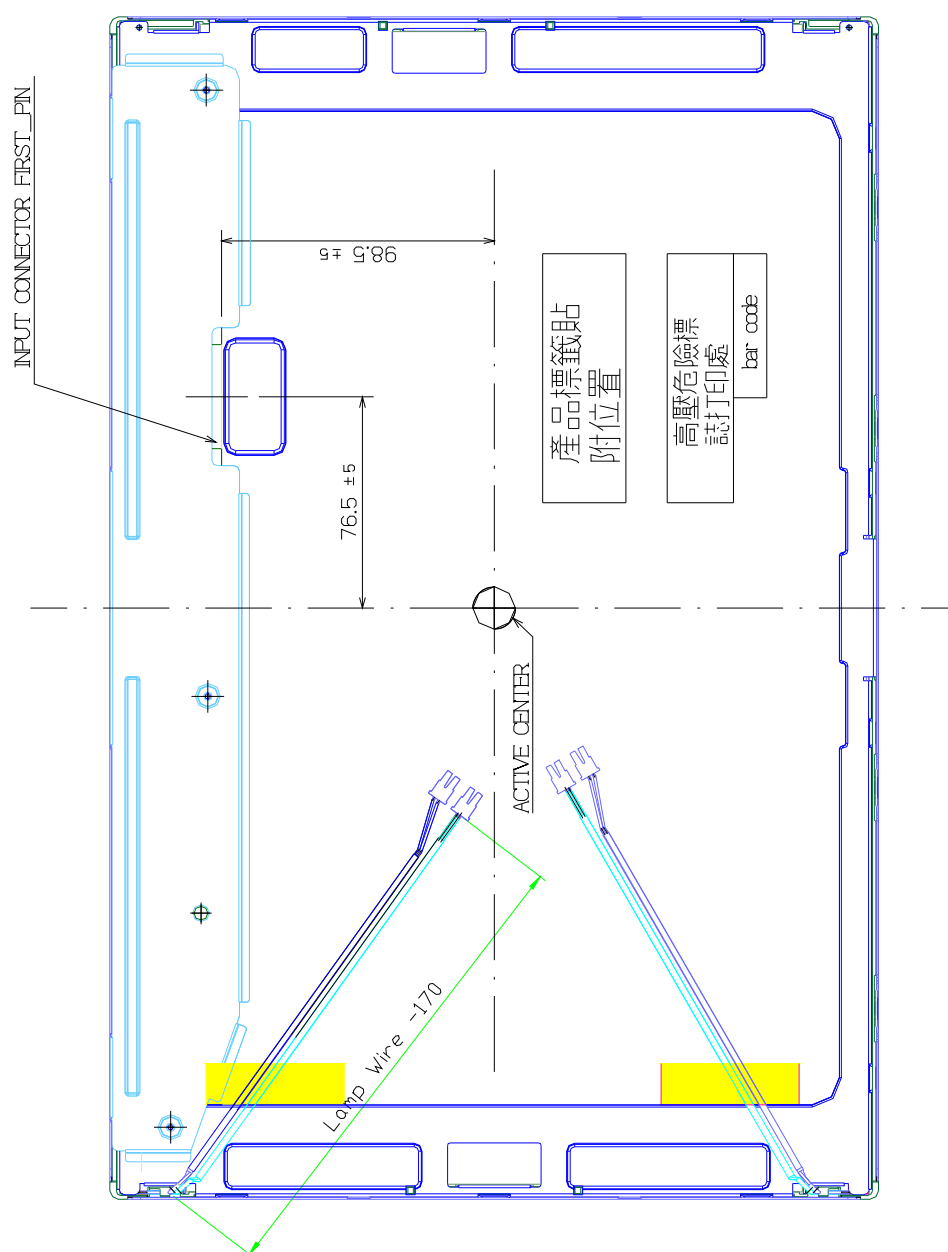**7.2 Back View:****Date: 2008.11.**

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.





|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 25/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

## 8.0 LOT MARK

### 8.1 Lot Mark

|   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|

code 1,2,3,4,5,6: HannStar internal flow control code.

code 7: production location.

code 8: production year.

code 9: production month.

code 10,11,12,13,14,15: serial number.

#### Note (1) Production Year

|      |      |      |      |      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|------|------|------|------|
| Year | 1999 | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 |
| Mark | 9    | 0    | 1    | 2    | 3    | 4    | 5    | 6    | 7    | 8    |

#### Note (2) Production Month

|       |      |      |      |      |      |      |      |      |      |      |      |      |
|-------|------|------|------|------|------|------|------|------|------|------|------|------|
| Month | Jan. | Feb. | Mar. | Apr. | May. | Jun. | Jul. | Aug. | Sep. | Oct. | Nov. | Dec. |
| Mark  | 1    | 2    | 3    | 4    | 5    | 6    | 7    | 8    | 9    | A    | B    | C    |

### 8.2 Location of Lot Mark

- (1) The label is attached to the backside of the LCD module.
- (2) This is subject to change without prior notice.



The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.


|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 26/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

## 9.0 PACKAGE SPECIFICATION

### 9.1 Packing form

- (1) package quantity in one carton: 8 pieces.
- (2) carton size: 544 mm×308 mm×<sup>H</sup>406 mm.
- (3) for domestic transportation only.

### 9.2 Packing assembly drawings

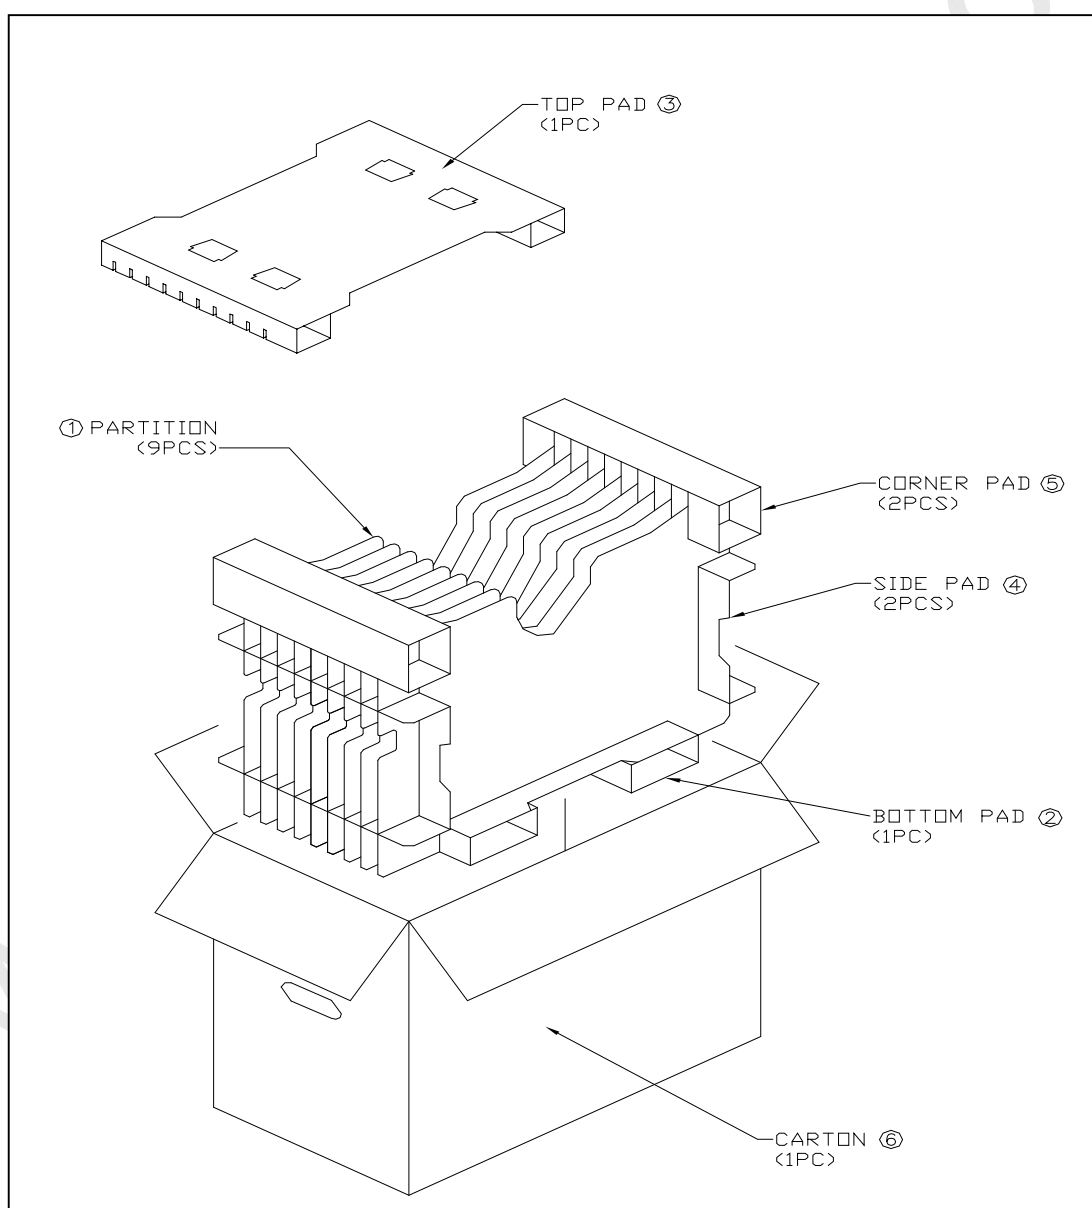

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 27/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

## 10.0 GENERAL PRECAUTION

### 10.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

### 10.2 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. HannStar does not warrant the module, if customers disassemble or modify the module.

### 10.3 Breakage of LCD Panel

- 10.3.1 If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.
- 10.3.2 If liquid crystal contacts mouth or eyes, rinse out with water immediately.
- 10.3.3 If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.
- 10.3.4 Handle carefully with chips of glass that may cause injury, when the glass is broken.

### 10.4 Electric Shock

- 10.4.1 Disconnect power supply before handling LCD module.
- 10.4.2 Do not pull or fold the CCFL cable.
- 10.4.3 Do not touch the parts inside LCD modules and the fluorescent lamp's connector or cables in order to prevent electric shock.

### 10.5 Absolute Maximum Ratings and Power Protection Circuit

- 10.5.1 Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.
- 10.5.2 Please do not leave LCD module in the environment of high humidity and high temperature for a long time.
- 10.5.3 It's recommended employing protection circuit for power supply.

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



|                |                                       |          |        |
|----------------|---------------------------------------|----------|--------|
| Document Title | HSD190MGW1 Specification for Roadwell | Page No. | 28/ 28 |
| Document No.   | DC130-003910                          | Revision | 1.0    |

## 10.6 Operation

- 10.6.1 Do not touch, push or rub the polarizer with anything harder than HB pencil lead. Use fingerstalls of soft gloves in order to keep clean display quality, when Persons handle the LCD module for incoming inspection or assembly.
- 10.6.2 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.
- 10.6.3 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading.
- 10.6.4 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzine or other adequate solvent.

## 10.7 Mechanism

Please mount LCD module by using mounting holes arranged in four corners tightly.

## 10.8 Static Electricity

- 10.8.1 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.
- 10.8.2 Because LCD module uses CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge.
- 10.8.3 Persons who handle the module should be grounded through adequate methods.

## 10.9 Strong Light Exposure

The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.

## 10.10 Disposal

When disposing LCD module, obey the local environmental regulations.

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.