

**HannStar**

Document Title	HSD280MUW4 Standard Specification	Page No.	1 / 29
Document No.	DC130-005214	Revision	1.0

To :

Date :

Customer Acceptance Specification

Model : **HSD280MUW4**
B++

Accepted by:

Signature

Date

Note:

- 1 Please contact Hannstar Display Corp. before designing your product based on this module specification.
- 2 The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by Hannstar for any intellectual property claims or other problems that may result from application based on the module described herein.
- 3 The mark " ** " of Model means sub-model code.



The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



HannStar Display Corp.

Document Title	HSD280MUW4 Standard Specification	Page No.	2 / 29
Document No.	DC130-005214	Revision	1.0

Record of Revisions

Rev.	Date	Sub-Model	Description of change
1.0	June 29, 2010	-B00	Product Information for HSD280MUW4-B was first issued.

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



HannStar Display Corp.

Document Title	HSD280MUW4 Standard Specification	Page No.	3 / 29
Document No.	DC130-005214	Revision	1.0

Contents

1.0	General Descriptions.....	p.4
2.0	Absolute Maximum Ratings.....	p.5
3.0	Optical Characteristics.....	p.7
4.0	Block Diagram.....	p.11
5.0	I/O Connection Pin Assignment.....	p.15
6.0	Electrical Characteristics.....	p.16
7.0	Outline Dimension.....	p.24
8.0	Lot Mark.....	p.26
9.0	Package Specification.....	p.27
10.0	General Precaution.....	p.28

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



HannStar Display Corp.

Document Title	HSD280MUW4 Standard Specification	Page No.	4 / 29
Document No.	DC130-005214	Revision	1.0

1.0 GENERAL DESCRIPTIONS

1.1 Introduction

HannStar Display model **HSD280MUW4-B** is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a WUXGA resolution (1920 vertical by 1200 horizontal pixel array) TFT LCD panel, the voltage reference, common voltage, DC-DC converter, column, and row driver circuit.

1.2 Features

- 28" (27.54") WUXGA TN mode TFT LCD panel
- High speed response time
- LED Backlight system
- Supported WUXGA (H: 1920 pixels, V: 1200 lines) resolution
- LVDS Interface
- RoHS compatible

1.3 General information

Item	Specification	Unit	
Outline dimension	629.0× 407.0× 15.8 (total thickness) (typ.)	mm	
	629.0× 407.0× 14.8 (with bolt) (typ.)		
	629.0× 407.0× 13.8 (with PCB) (typ.)		
	629.0× 407.0× 9.4 (Base) (typ.)		
Display area	593.28 (H) x370.8 (V)	mm	
Screen Diagonal	27.54	inch	
Number of Pixel	1920(H) x 1200(V)	Pixels	
Pixel pitch	0.309(H) x 0.309(V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display color	16.7M (6-bit+FRC)		
Display mode	Normally white		
Surface treatment	Antiglare, hard coating (3H)		
Response Time	Tr + Tf 5 (TYP.)	msec	
Weight	3200	g	
Back-light	White LED, Side-light type		
Input signal	2-ch LVDS		
Power consumption	Logic system	6.2(TYP)	W
	B/L system	29.568(TYP)	W

1.4 Applications

- Desktop and Multi-function monitors
- Display terminals for AV applications
- Monitors for industrial applications

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



HannStar Display Corp.

Document Title	HSD280MUW4 Standard Specification	Page No.	5 / 29
Document No.	DC130-005214	Revision	1.0

1.5 Mechanical Information


Item	Min.	Typ.	Max.	Unit	
Module Size	Horizontal(H)	628.0	629.0	630.0	mm
	Vertical(V)	406.0	407.0	408.0	mm
	Depth(D)	-	14.8 (with bolt) 13.8 (with PCB) 9.4 (Base)	-	mm
Weight (Without Inverter)	3000	3200	3400	g	
Torque of customer screw hole			3.0	Kgf*cm	

2.0 ABSOLUTE MAXIMUM RATINGS

2.1 Absolute Rating of Environment

Item	Symbol	Min.	Max.	Unit	Note
Storage temperature	T_{STG}	-20	60	°C	
Operating temperature	T_{OPR}	0	50	°C	(1)
Vibration (non-operating)	V_{NOP}	--	1.5	G	(2)
Shock (non-operating)	S_{NOP}	--	50	G	(3)
Storage humidity	H_{STG}	10	90	%RH	(3)
Operating humidity	H_{OP}	10	80	%RH	(4)
Low pressure (operating)	P_{LOP}	697	--	HPa	(5)
Low pressure (non-operating)	P_{LNO}	116	--	HPa	(6)

Note (1) Storage /Operating temperature

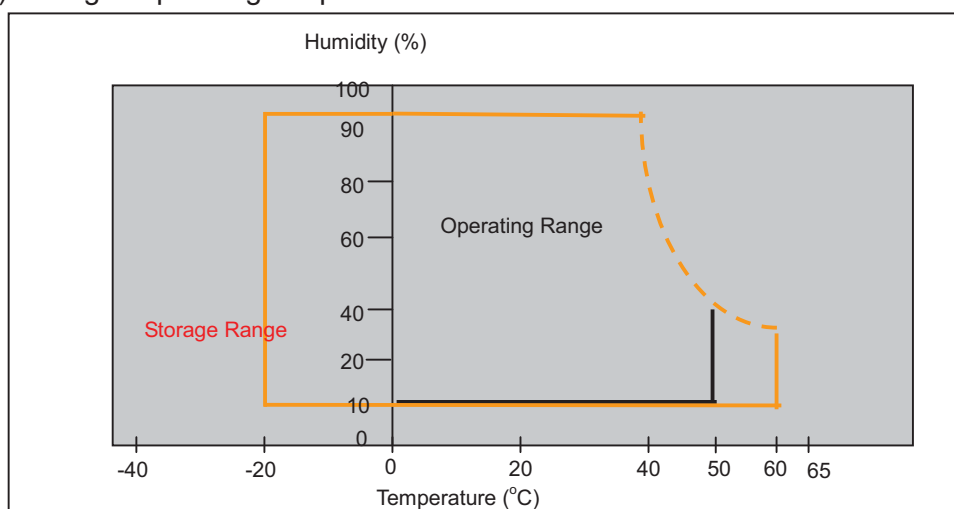

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



HannStar Display Corp.

Document Title	HSD280MUW4 Standard Specification	Page No.	6 / 29
Document No.	DC130-005214	Revision	1.0

- (2) 10-500Hz sine wave, X,Y,Z each directions, 30min/cycle.
- (3) 11ms, $\pm X$, $\pm Y$, $\pm Z$ direction, one time each. For this shock test,
It is necessary to fill the silicon rubber between the shock jigs as buffer.
- (4) Max wet bulb temp. $\approx 39^{\circ}\text{C}$
- (5) 2 hrs. (10000 feet)
- (6) 24hrs. (50000 feet)

2.2 Electrical Absolute Rating:

2.2.1 TFT LCD Module:

Item	Symbol	Min.	Max.	Unit.	Note
Power supply Voltage	VDD	-0.3	5.5	V(DC)	(1)(2)

2.2.2 Back Light Unit:

Item	Symbol	Min.	Max.	Unit	Note
LED current	I_F	--	113	mA	(1)(2)(3)
LED voltage	V_F	2.95	3.4	Volt	(1)(2)(3)

Note: (1) Permanent damage may occur to the LCD module if beyond this specification.
Functional operation should be restricted to the conditions described under Normal Operating Conditions.

(2) Within $T_a=25\pm 2^{\circ}\text{C}$



HannStar Display Corp.

Document Title	HSD280MUW4 Standard Specification	Page No.	7 / 29
Document No.	DC130-005214	Revision	1.0

3.0 OPTICAL CHARACTERISTICS

3.1 Optical specification

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast	CR		600	800	--		(1)(2)
Response time	Rising	TR	--	5 (Tr+Tf)	10 (Tr+Tf)	msec	(1)(3)
	Falling	TF	--				
White luminance (center of screen)	Y_L	$\Theta=0^\circ$ $\phi=0^\circ$	320	400		cd/m ²	(1)(4)
Color chromaticity (CIE1931)	Red	Rx	Normal viewing	-0.03	+0.03		(1)(5)
		Ry					
	Green	Gx					
		Gy					
	Blue	Bx					
		By					
	White	Wx					
		Wy					
Viewing angle	Hor.	Θ_L	75	85	--		
		Θ_R	75	85	--		
	Ver.	Θ_H	70	80	--		
		Θ_L	70	80	--		
Brightness uniformity	B_{UNI}	$\Theta=0^\circ$ $\phi=0^\circ$	70	--	--	%	(6)

3.2 Measuring Condition

- Measuring surrounding: dark room
- Each LED current is 110 mA
- $V_{DD1}=5.0V$, $f_V=60Hz$, $f_{DCLK}=77MHz$
- Surrounding temperature: $25\pm 2^\circ C$
- 20 min. Warm-up time.


The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

Document Title	HSD280MUW4 Standard Specification	Page No.	8 / 29
Document No.	DC130-005214	Revision	1.0

3.3 Measuring Equipment

- FPM520 of Westar Display technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics.
- Measuring spot size : 20~21mm

Note (1) Definition of Viewing Angle:

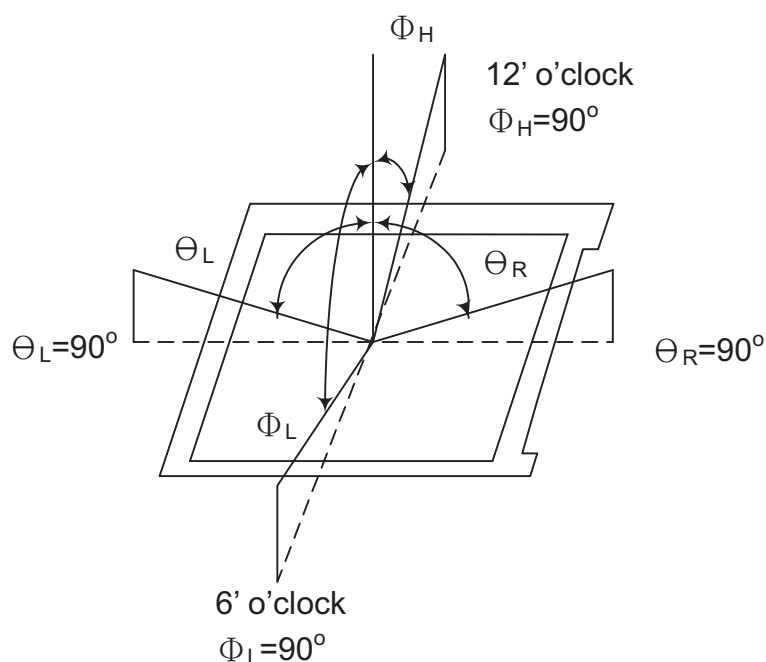


Note (2) Definition of Contrast Ratio(CR) :
measured at the center point of panel


$$CR = \frac{\text{Luminance with all pixels white (L255)}}{\text{Luminance with all pixels black (L0)}}$$

Document Title	HSD280MUW4 Standard Specification	Page No.	9 / 29
Document No.	DC130-005214	Revision	1.0

Note (3) Definition of Response Time: Sum of T_R and T_F

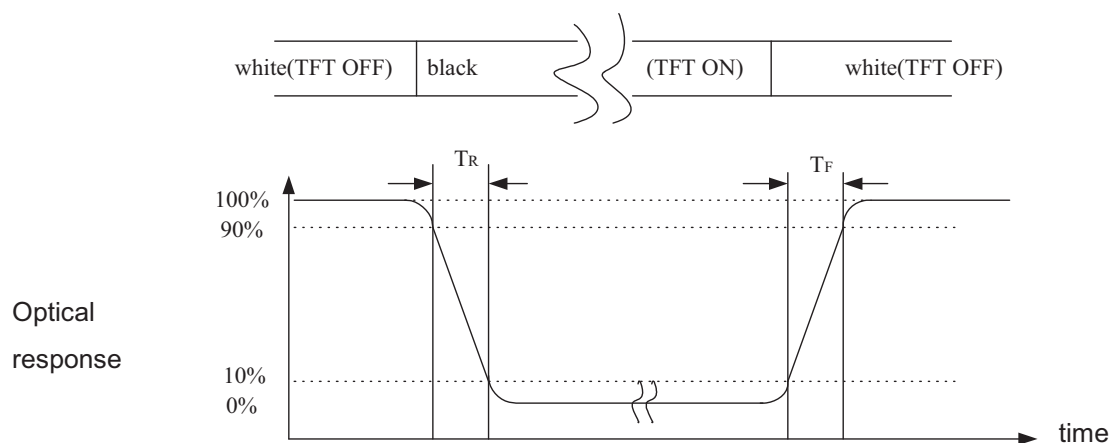


Note (4) Optical characteristic measurement setup

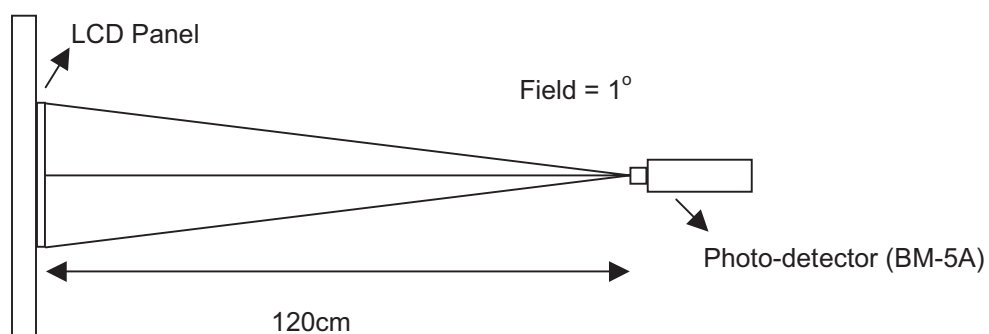

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

Document Title	HSD280MUW4 Standard Specification	Page No.	10 / 29
Document No.	DC130-005214	Revision	1.0

Note (5) Definition of Center Luminance of White
Center Luminance= Y1

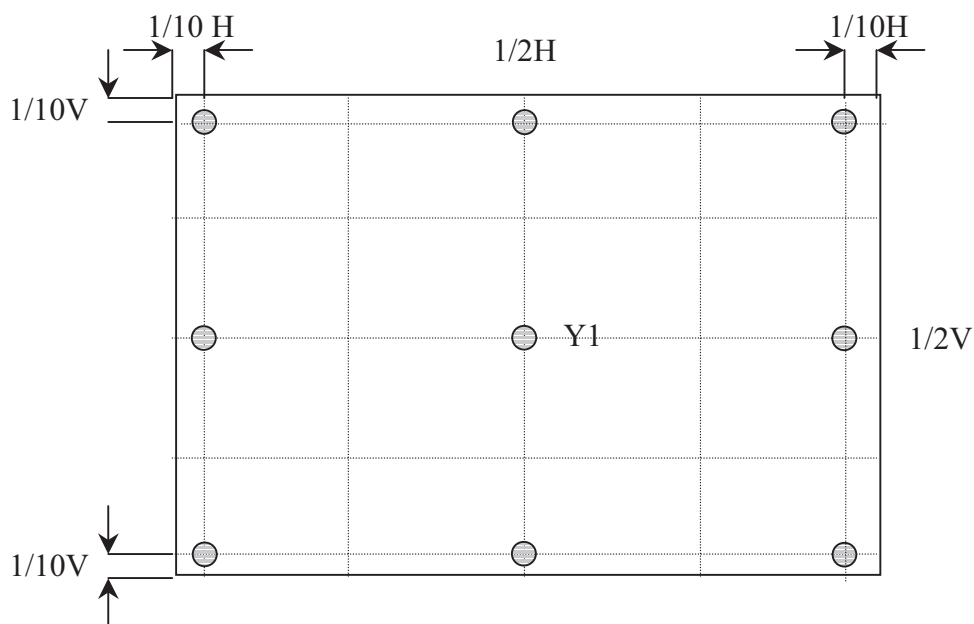


Note (6) Definition of brightness uniformity

$$\text{Luminance Uniformity} = \frac{(\text{Min Luminance of 9 points})}{(\text{Max Luminance of 9 points})} \times 100\%$$

Document Title	HSD280MUW4 Standard Specification	Page No.	11 / 29
Document No.	DC130-005214	Revision	1.0

4.0 BLOCK DIAGRAM

4.1 LCD Module Block Diagram:

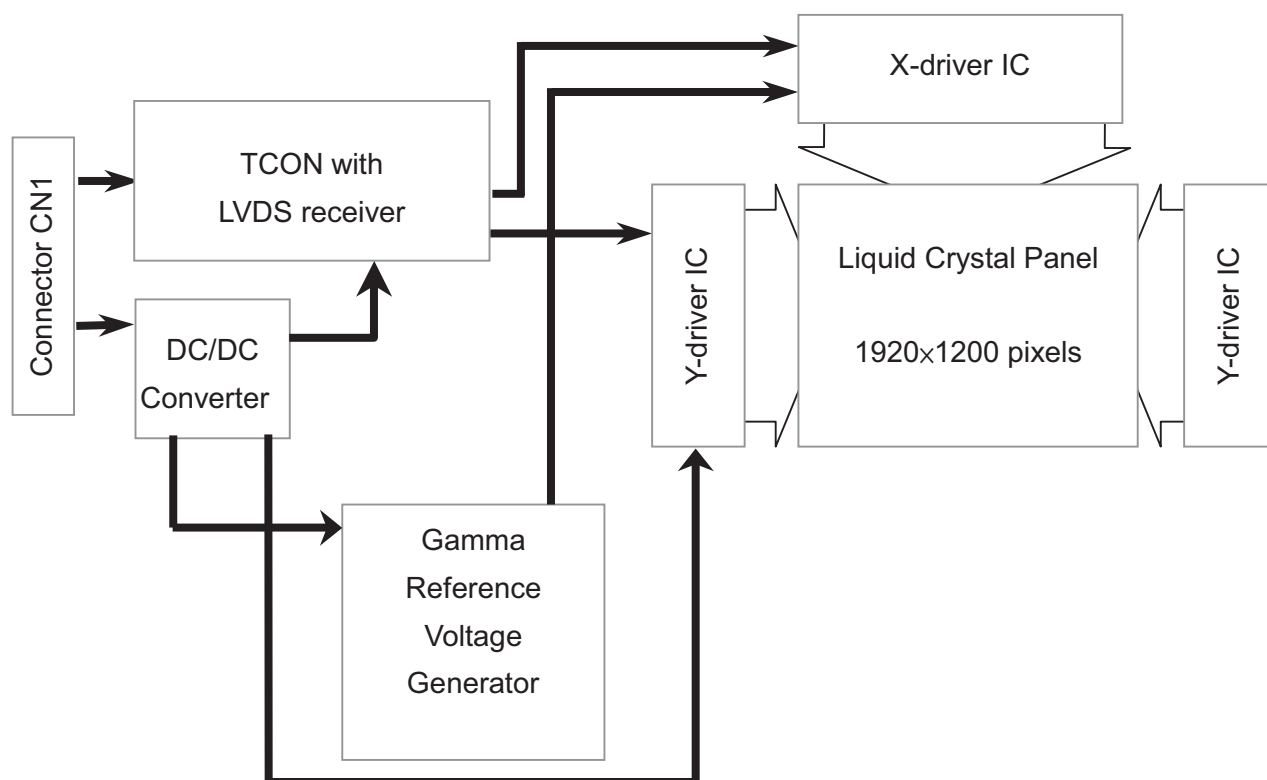


The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.




HannStar Display Corp.

Document Title	HSD280MUW4 Standard Specification	Page No.	12 / 29
Document No.	DC130-005214	Revision	1.0

4.2 Backlight Unit

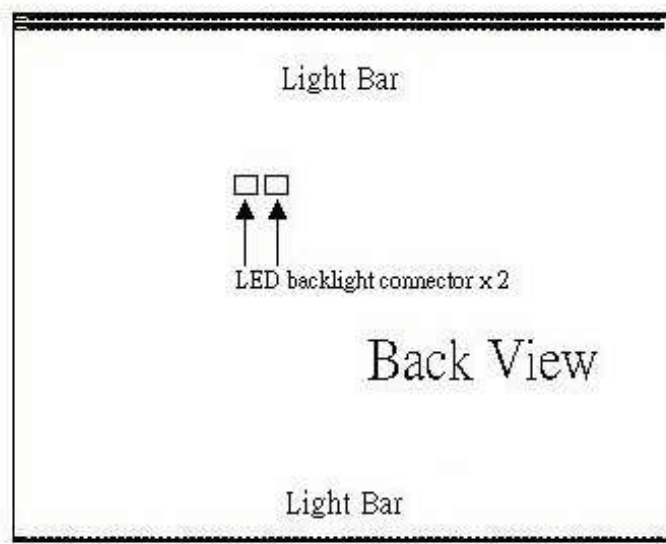

4.3 Pixel Format

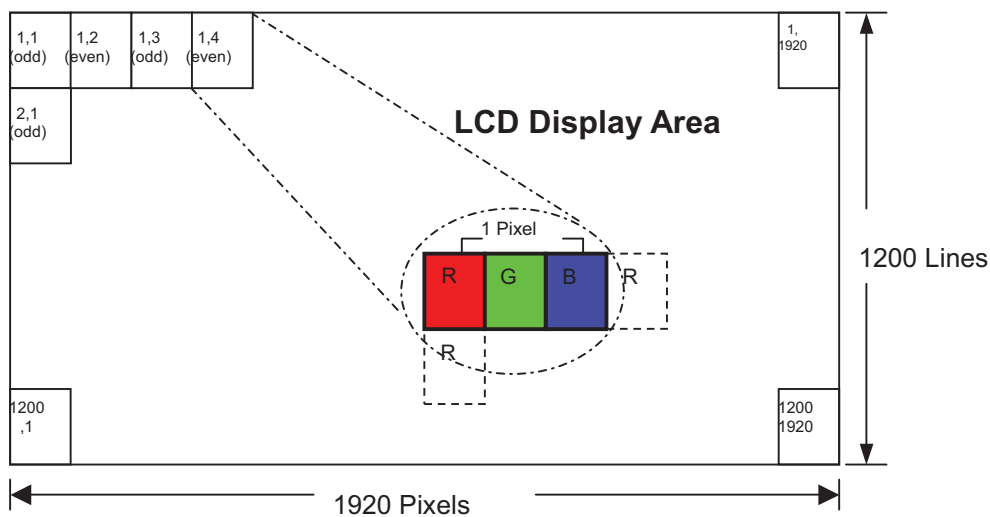

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



HannStar Display Corp.

Document Title	HSD280MUW4 Standard Specification	Page No.	13 / 29
Document No.	DC130-005214	Revision	1.0

4.4 Relationship Between Displayed Color and Input

	Display	MSB				LSB				MSB				LSB				Gray scale Level									
		R	R	R	R	R	R	R	R	G	G	G	G	G	G	G	G		B	B	B	B	B	B	B	B	
		7	6	5	4	3	2	1	0	7	6	5	4	3	2	1	0	7	6	5	4	3	2	1	0		
Basic color	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-	
	Blue	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	-	
	Green	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	-	
	Light Blue	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	-	
	Red	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-	
	Purple	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	-	
	Yellow	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	-	
White	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	-		
Gray scale of Red	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0	
	Dark	↑	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L1
			L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L2
			:	:	:	L3...L251																					
	Light	↓	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L255
			H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L255
H			H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L255	
Red	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	Red L255		
Gray scale of Green	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0	
	Dark	↑	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L1
			L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L2
			:	:	:	L3...L251																					
	Light	↓	L	L	L	L	L	L	L	L	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L255
			L	L	L	L	L	L	L	L	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L255
L			L	L	L	L	L	L	L	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L255	
Green	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	Green L255		
Gray scale of Blue	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0	
	Dark	↑	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L1
			L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L2
			:	:	:	L3...L251																					
	Light	↓	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	L	L	L	L	L255
			L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	L	L	L	L	L255
L			L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	L	L	L	L255	
Blue	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	Blue L255		
Gray scale of White & Black	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0	
	Dark	↑	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L1
			L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L2
			:	:	:	L3...L251																					
	Light	↓	H	H	H	H	L	L	L	L	H	H	H	H	L	L	L	L	H	H	H	H	L	L	L	L	L252
			H	H	H	H	L	L	L	L	H	H	H	H	L	L	L	L	H	H	H	H	L	L	L	L	L253
H			H	H	H	H	H	H	H	L	L	L	L	H	H	H	H	L	L	L	L	L	L	L	L	L254	
White	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	White L255		

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



HannStar Display Corp.

Document Title	HSD280MUW4 Standard Specification	Page No.	14 / 29
Document No.	DC130-005214	Revision	1.0

5.0 I/O CONNECTION PIN ASSIGNMENT

5.1 Interface Connector (30-pins) (JAE: FI-X30SSL-HF or equivalent)

Pin No.	Signal	Description
1	RinO0-	Receiver Signal (-)
2	RinO0+	Receiver Signal (+)
3	RinO1-	Receiver Signal (-)
4	RinO1+	Receiver Signal (+)
5	RinO2-	Receiver Signal (-)
6	RinO2+	Receiver Signal (+)
7	VSS	Ground
8	RinOC-	Clock Signal (-)
9	RinOC+	Clock Signal (+)
10	RinO3-	Receiver Signal (-)
11	RinO3+	Receiver Signal (+)
12	RinE0-	Receiver Signal (-)
13	RinE0+	Receiver Signal (+)
14	VSS	Ground
15	RinE1-	Receiver Signal (-)
16	RinE1+	Receiver Signal (+)
17	VSS	Ground
18	RinE2-	Receiver Signal (-)
19	RinE2+	Receiver Signal (+)
20	RinEC-	Clock Signal (-)
21	RinEC+	Clock Signal (+)
22	RinE3-	Receiver Signal (-)
23	RinE3+	Receiver Signal (+)
24	VSS	Ground
25	VSS	Ground
26	VSS	Ground
27	VDD+5V	Power Supply, 5V (Typical)
28	VDD+5V	Power Supply, 5V (Typical)
29	VDD+5V	Power Supply, 5V (Typical)
30	VDD+5V	Power Supply, 5V (Typical)

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.


Document Title	HSD280MUW4 Standard Specification	Page No.	15 / 29
Document No.	DC130-005214	Revision	1.0

5.2 LED Board Pin Assignment:

CN102: LED Power Source Connector (JOWLE A2501H02-6P or equivalent)

Pin No	Symbol	Description
1	IRLED1	LED Current Sense for String 1
2	NC	NC
3	VLED	LED Power Supply
4	VLED	LED Power Supply
5	NC	NC
6	IRLED1	LED Current Sense for String 1

Pin No	Symbol	Description
1	IRLED2	LED Current Sense for String 2
2	NC	NC
3	VLED	LED Power Supply
4	VLED	LED Power Supply
5	NC	NC
6	IRLED2	LED Current Sense for String 2

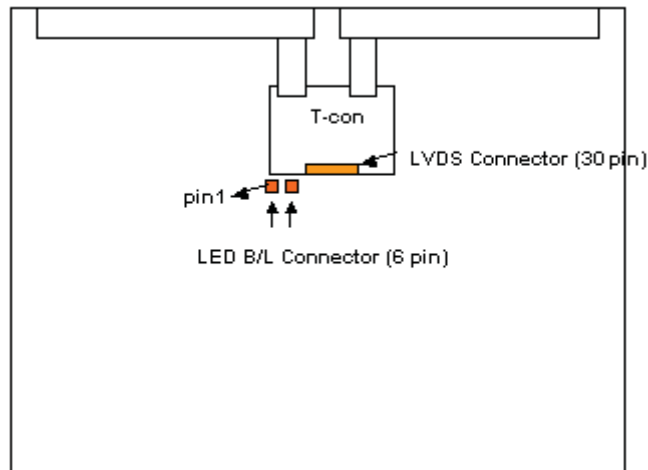

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

Document Title	HSD280MUW4 Standard Specification	Page No.	16 / 29
Document No.	DC130-005214	Revision	1.0

6.0 ELECTRICAL CHARACTERISTICS

6.1 TFT LCD Module:


Item	Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of power supply	V_{DD}	4.5	5.0	5.5	V	
Current of power supply	I_{DD1}	760	955	1150	mA	(1)
Vsync frequency	f_V	48	60	75	Hz	(2)
Hsync frequency	f_H	59.28	74.10	92.62	KHz	
Frequency	f_{DCLK}	61.65	77.06	90.75	MHz	
Input rush current	I_{RUSH}	---	---	3	A	(3)

Note (1) Black pattern (L0):



Note (2) When f_v is too low, a flicker may be occurred on the display.

Note (3) Input Rush Current condition

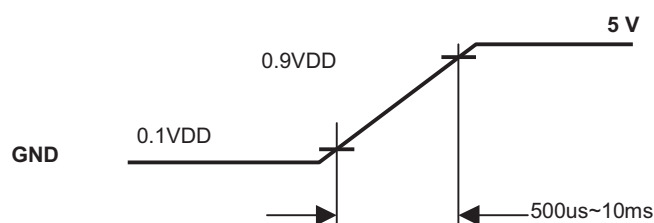

Document Title	HSD280MUW4 Standard Specification	Page No.	17 / 29
Document No.	DC130-005214	Revision	1.0

6.2 Back-Light Unit

The backlight system is an edge-lighting type with LEDs. The characteristics are shown in the following table.

Parameter	Symbol	Min	Typ	Max	Units	Condition
Light Bar Input Current	I_F	---	330	---	mA	Ta=25°C
Light Bar Input Voltage	V_F	---	44.8	---	Volt	Ta=25°C
LED Power consumption	P_{LED}	---	29.568	---	Watt	Ta=25°C Note (1)
LED Life-Time	N/A	--	30,000	--	Hour	Ta=25°C $I_F=20mA$ Note (2)


Notes (1) Calculator value for reference $P=I_F \times V_F \times N$ (LED Qty')

Notes (2) The LED lifetime defines as the estimated time to 50% degradation of original luminance

Notes (3) For better LED light bar driving quality. It is recommended to utilize the adaptive boost converter with current balancing function to drive LED light-bar.

Notes (4) One Light bar Input current 330mA.


Notes (5) LED light bar configuration is shown as below. (Up light bars are the same as down light bars)

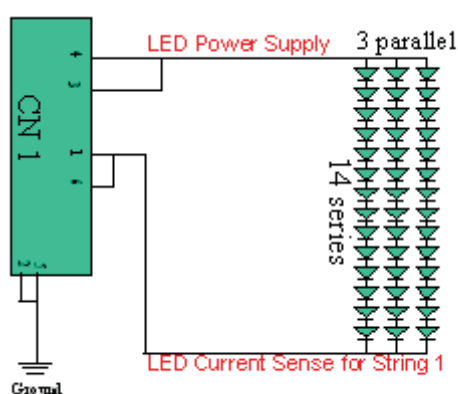

Document Title	HSD280MUW4 Standard Specification	Page No.	18 / 29
Document No.	DC130-005214	Revision	1.0

6.3 Switching Characteristics for LVDS Receiver

Item	Symbol	Min.	Typ.	Max.	Unit	Conditions
Differential Input High Threshold	V_{th}	—	—	100	mV	$V_{CM}=1.2V$
Differential Input Low Threshold	V_{tl}	-100	—	—	mV	
Input Current	I_{IN}	-10	—	10	μA	
Input Voltage Range(Signal ended)	V_{IN}	0	—	2.4	V	
Differential input Voltage	$ V_{ID} $	100	—	600	mV	
Common Mode Voltage Offset	V_{CM}	$ V_{ID} /2$	—	$2.4- V_{ID} /2$	V	
Clock Frequency	f_c	61	77	91	MHz	
LVDS Skew Margin	t_{RSKM}	—	—	200	pS	At $f_c=77MHz$
LVDS Input Clock Jitter Tolerance	—	—	—	± 2.5	%	center spread

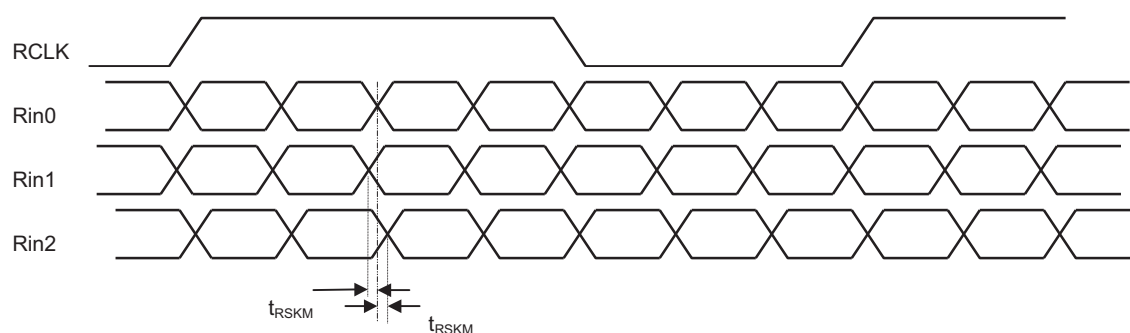

LVDS Receiver skew margin



The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



HannStar Display Corp.

Document Title	HSD280MUW4 Standard Specification	Page No.	19 / 29
Document No.	DC130-005214	Revision	1.0

6.4 Bit Mapping & Interface Definition

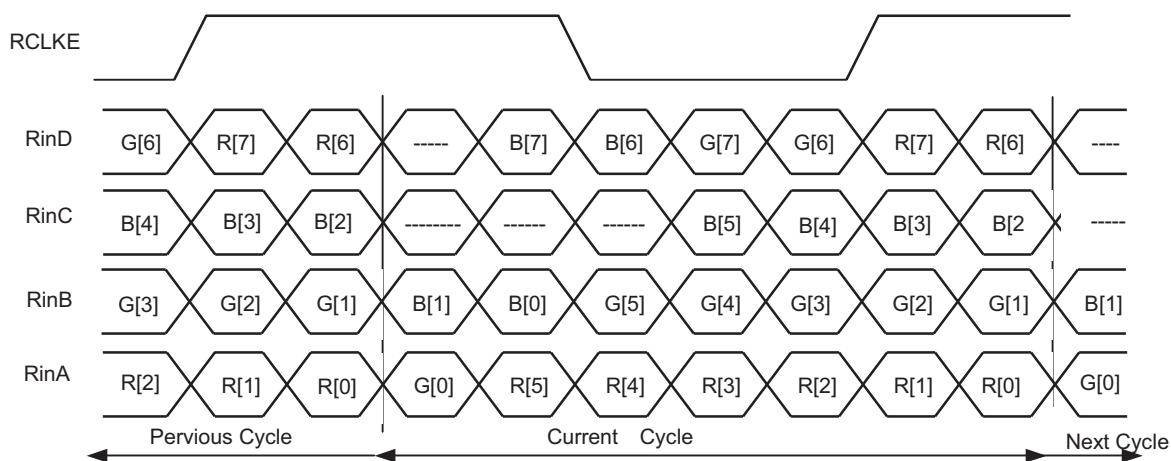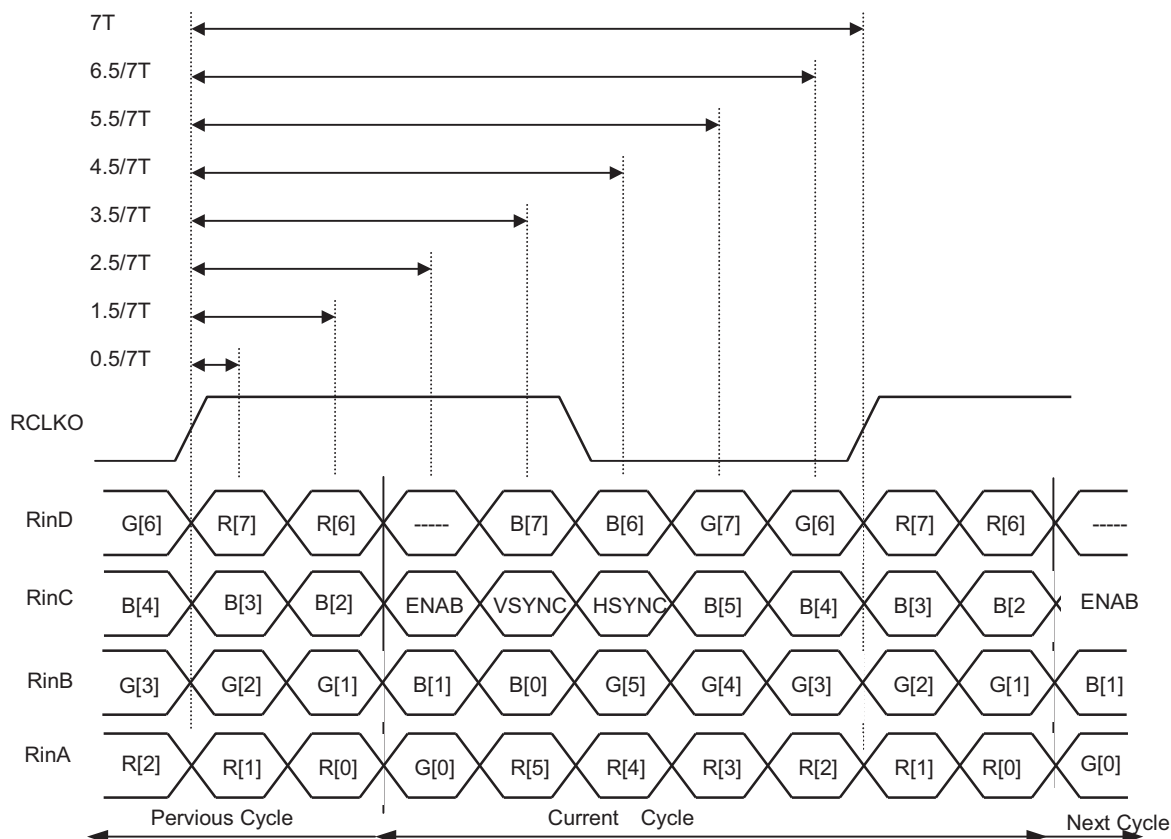

Bit Mapping & Timing Definition


The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

Document Title	HSD280MUW4 Standard Specification	Page No.	20 / 29
Document No.	DC130-005214	Revision	1.0

6.5 Interface Timing (DE mode)

Item	Symbol	Min.	Typ.	Max.	Unit
Frame Rate	--	48	60	75	Hz
Frame Period	t1	1210	1235	1350	line
Vertical Display Time	t2	1200	1200	1200	line
Vertical Blanking Time	t3	10	35	150	line
1 Line Scanning Time	t4	1000	1040	1200	clock
Horizontal Display Time	t5	960	960	960	clock
Horizontal Blanking Time	t6	40	80	240	clock
Clock Rate	t7	61.65	77.06	90.75	MHz


Timing Diagram of Interface Signal (DE mode)

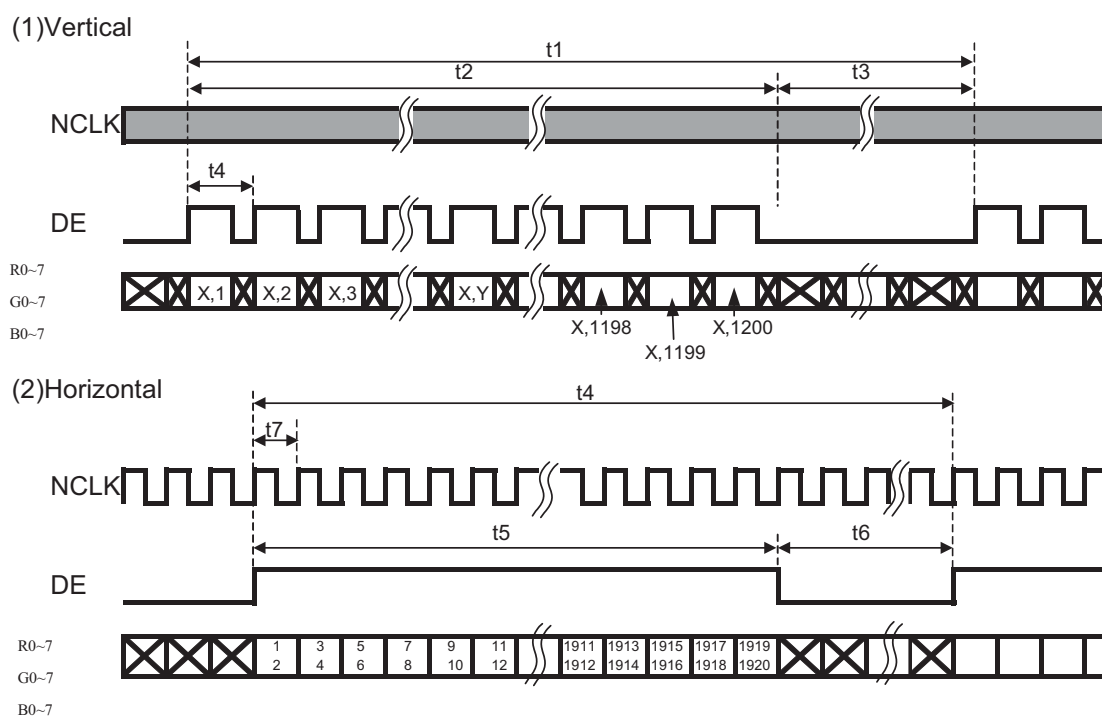

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

Document Title	HSD280MUW4 Standard Specification	Page No.	21 / 29
Document No.	DC130-005214	Revision	1.0

6.6 Power On / Off Sequence :

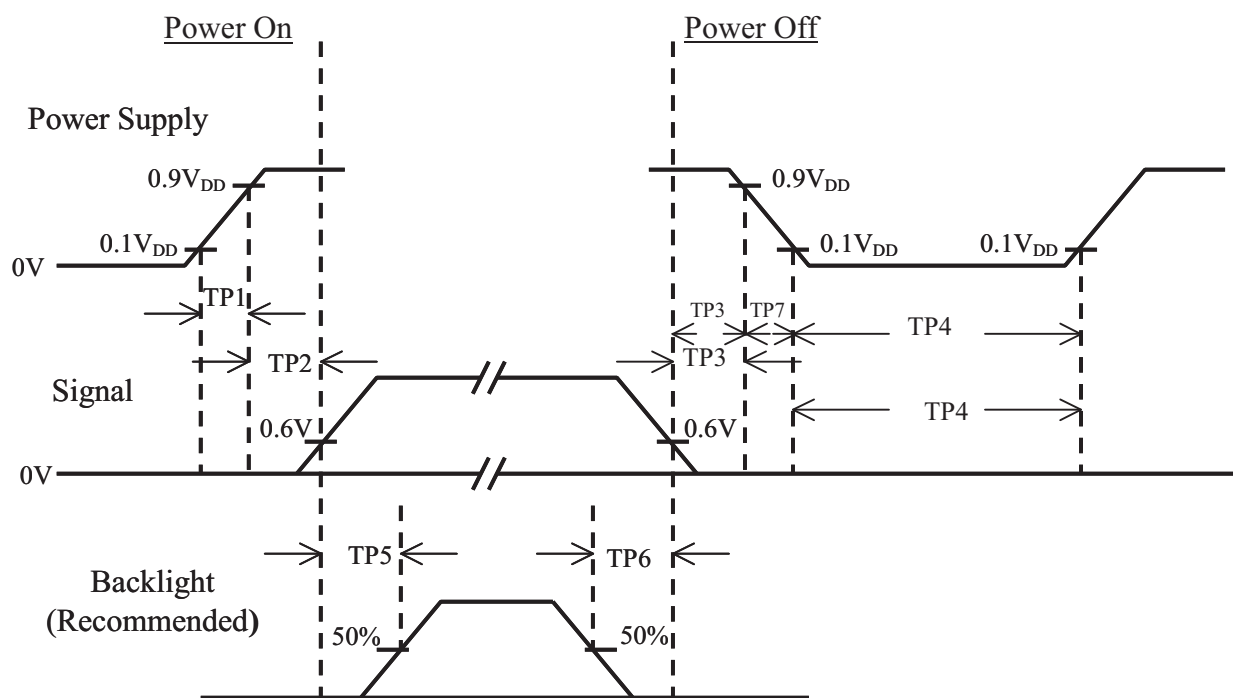


Item	Min.	Typ.	Max.	Unit	Remark
TP1	0.5	--	10	msec	
TP2	0.01	--	50	msec	
TP3	20	35	50	msec	
TP4	1000	--	--	msec	
TP5	200	--	--	msec	
TP6	200	--	--	msec	
TP7	1	--	10	msec	

Note : (1) The supply voltage of the external system for the module input should be the same as the definition of V_{DD} .

- (2) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become white.
- (3) In case of $V_{DD} = \text{off level}$, please keep the level of input signal on the low or keep a high impedance.
- (4) TP4 should be measured after the module has been fully discharged between power off and on period.
- (5) Interface signal shall not be kept at high impedance when the power is on.

Document Title	HSD280MUW4 Standard Specification	Page No.	22 / 29
Document No.	DC130-005214	Revision	1.0

6.7 V_{LCD} Power Dip Condition :

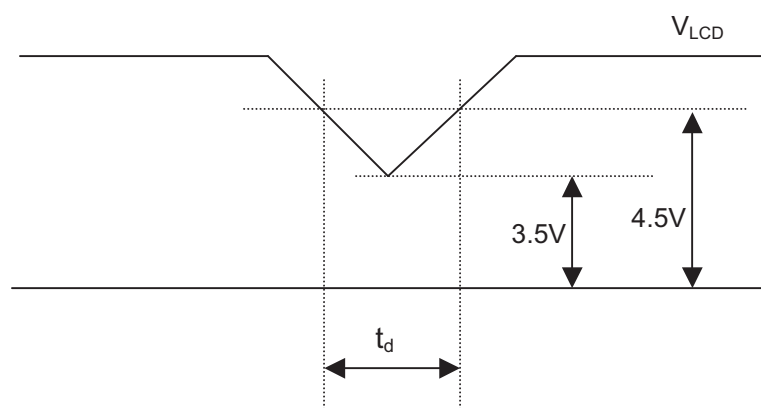

Note : (1) Dip condition

$$3.5V < V_{LCD} \leq 4.5V, t_d \leq 20ms$$

(2) $V_{LCD} < 3.5V$

V_{LCD} - dip conditions should also follow the power On/Off conditions for supply voltage.




HannStar Display Corp.

Document Title	HSD280MUW4 Standard Specification	Page No.	23 / 29
Document No.	DC130-005214	Revision	1.0

7.0 OUTLINE DIMENSION


7.1 Front View:

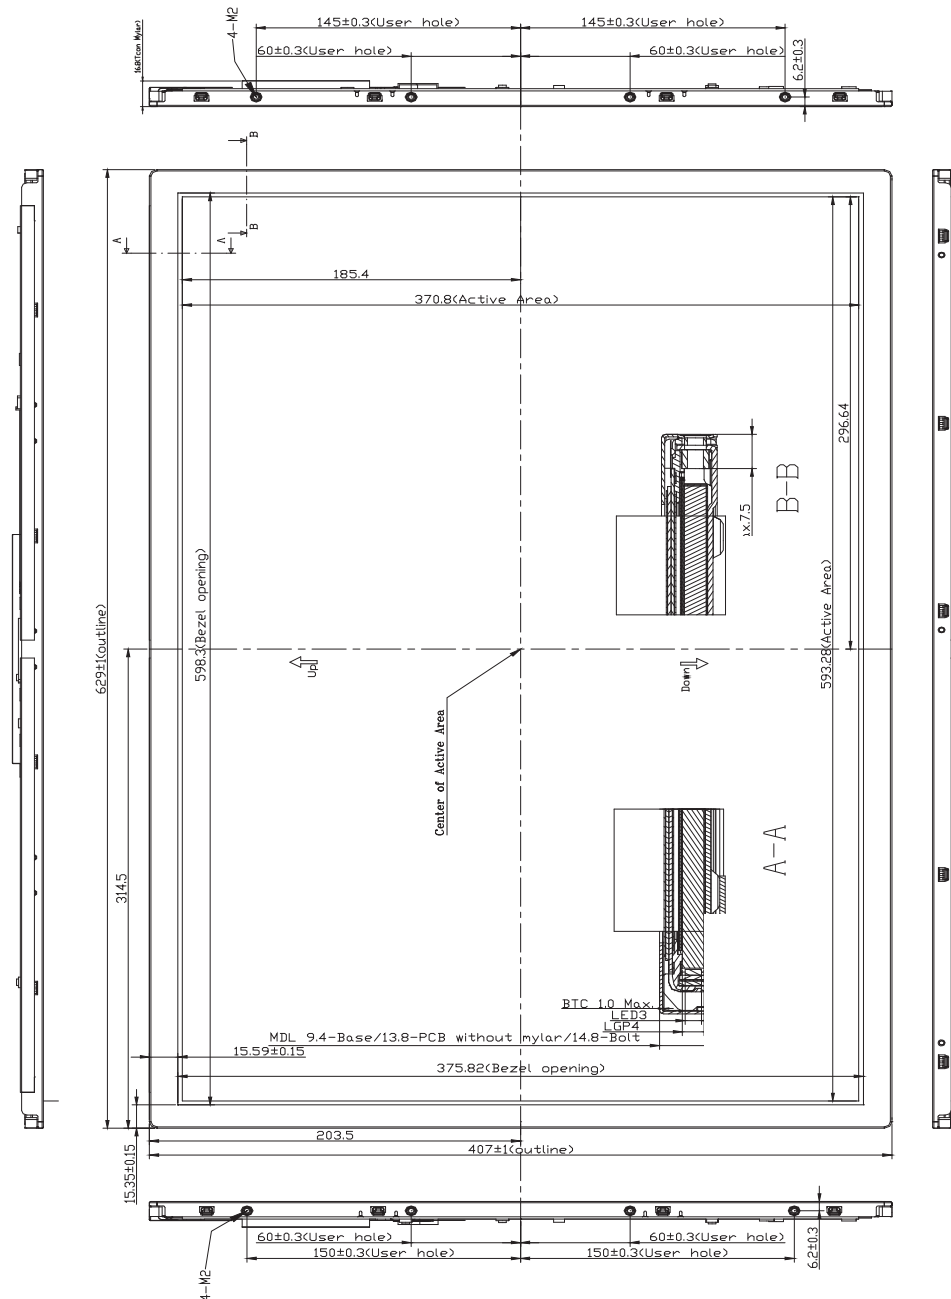

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

Document Title	HSD280MUW4 Standard Specification	Page No.	24 / 29
Document No.	DC130-005214	Revision	1.0

7.2 Back View:

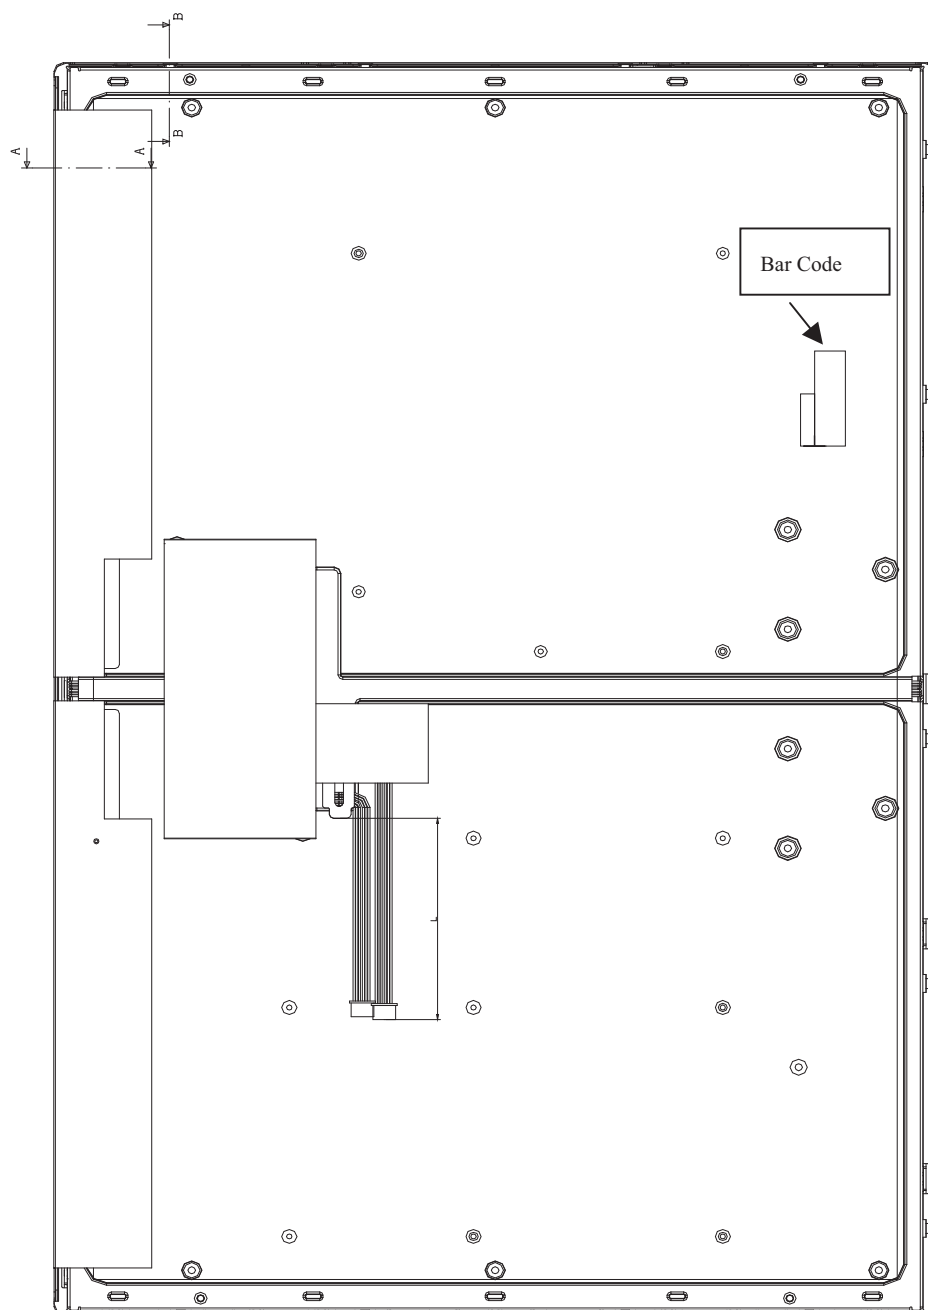


1. Backlight: LED Light Source
2. I/F Connector (CN1) Specification:
P-TWO 187067-3009 for Equivalent
3. User Mounting Torque Spec: 3Kgf-cm Max.
4. Unspecified Tolerance is $\pm 0.5\text{mm}$
5. Wire Length $L=145\pm 10\text{mm}$

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



HannStar Display Corp.

Document Title	HSD280MUW4 Standard Specification	Page No.	25 / 29
Document No.	DC130-005214	Revision	1.0

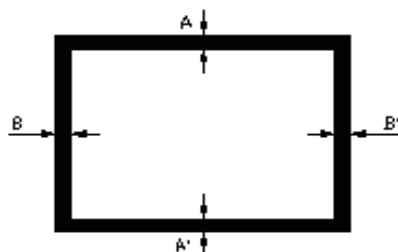

BM Assembly Tolerance

$$|A-A'| \leq 1.5 \text{ (mm)}$$

$$|B-B'| \leq 1.5 \text{ (mm)}$$

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

Document Title	HSD280MUW4 Standard Specification	Page No.	26 / 29
Document No.	DC130-005214	Revision	1.0

8.0 LOT MARK

8.1 Lot Mark

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----

code 1,2,3,4,5,6: HannStar internal flow control code.

code 7: production location.

code 8: production year.

code 9: production month.

code 10,11,12,13,14,15: serial number.

Note (1) Production Year: Code 8 is defined by the last number of the year. For example:

Year	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015
Mark	6	7	8	9	0	1	2	3	4	5

Note (2) Production Month

Month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	A	B	C

8.2 Location of Lot Mark

(1) The label is attached to the backside of the LCD module.

(2) This is subject to change without prior notice.



Lot mark


Document Title	HSD280MUW4 Standard Specification	Page No.	27 / 29
Document No.	DC130-005214	Revision	1.0

9.0 PACKAGE SPECIFICATION

9.1 Packing form

- (1) package quantity in one carton: 6 pieces.
- (2) carton size: 803 mm×279 mm×552^H mm.
- (3) for domestic transportation only.

9.2 Packing assembly drawings

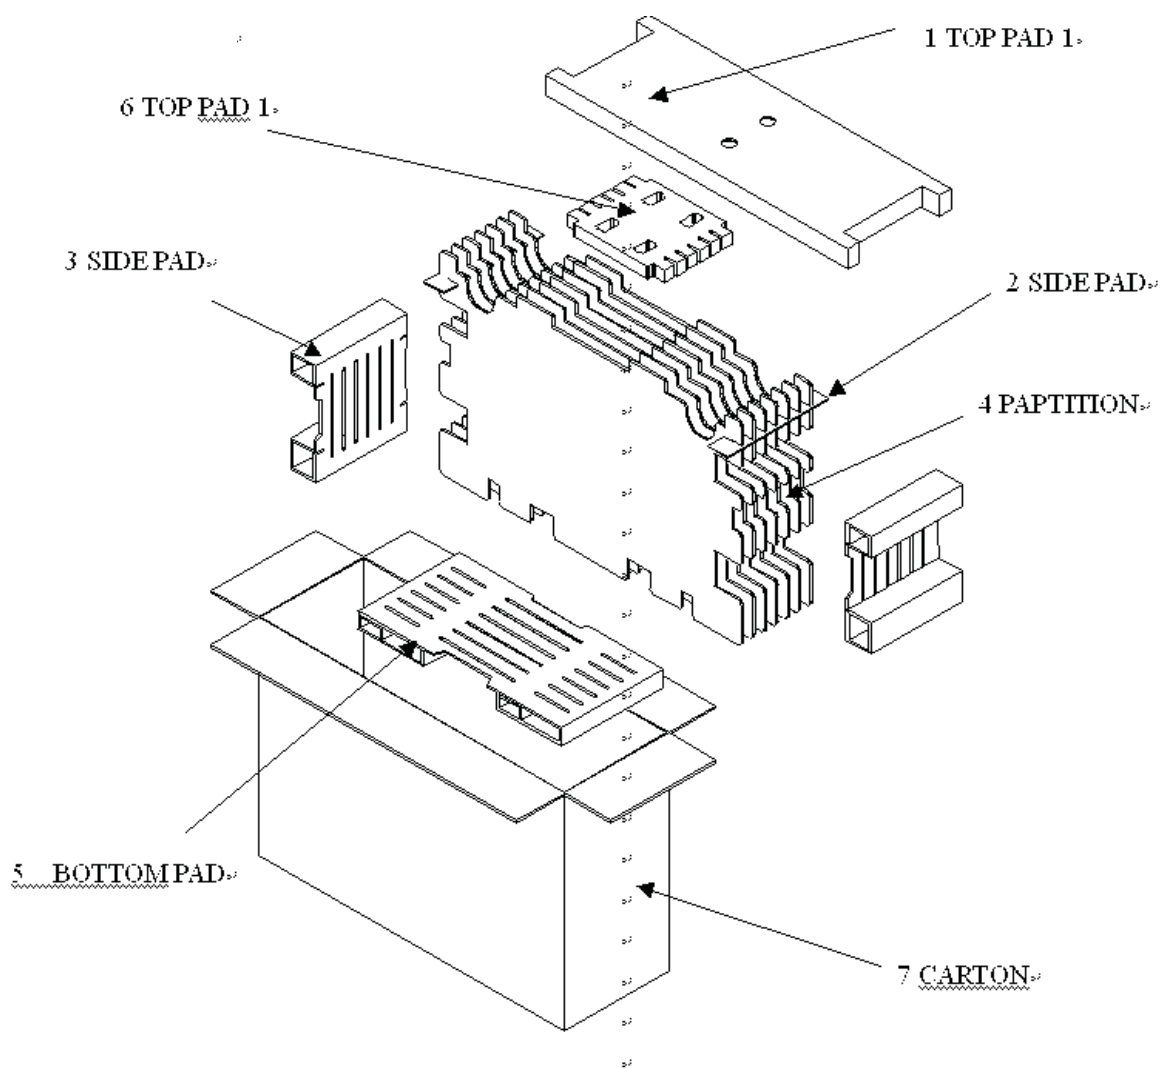

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



HannStar Display Corp.

Document Title	HSD280MUW4 Standard Specification	Page No.	28 / 29
Document No.	DC130-005214	Revision	1.0

10.0 GENERAL PRECAUTION

10.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

10.2 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. HannStar does not warrant the module, if customers disassemble or modify the module.

10.3 Breakage of LCD Panel

10.3.1 If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.

10.3.2 If liquid crystal contacts mouth or eyes, rinse out with water immediately.

10.3.3 If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.

10.3.4 Handle carefully with chips of glass that may cause injury, when the glass is broken.

10.4 Electric Shock

10.4.1 Disconnect power supply before handling LCD module.

10.4.2 Do not pull or fold the CCFL cable.

10.4.3 Do not touch the parts inside LCD modules and the fluorescent lamp's connector or cables in order to prevent electric shock.

10.5 Absolute Maximum Ratings and Power Protection Circuit

10.5.1 Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.

10.5.2 Please do not leave LCD module in the environment of high humidity and high temperature for a long time.

10.5.3 It's recommended employing protection circuit for power supply.

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



HannStar Display Corp.

Document Title	HSD280MUW4 Standard Specification	Page No.	29 / 29
Document No.	DC130-005214	Revision	1.0

10.6 Operation

- 10.6.1 Do not touch, push or rub the polarizer with anything harder than HB pencillead. Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.
- 10.6.2 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.
- 10.6.3 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading.
- 10.6.4 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzene or other adequate solvent.

10.7 Mechanism

Please mount LCD module by using mounting holes arranged in four corners tightly.

10.8 Static Electricity

- 10.8.1 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.
- 10.8.2 Because LCD module uses CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge.
- 10.8.3 Persons who handle the module should be grounded through adequate methods.

10.9 Strong Light Exposure

The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.

10.10 Disposal

When disposing LCD module, obey the local environmental regulations.

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.