



HVPF

HIGH VOLTAGE SINGLE-PHASE FULL WAVE BRIDGE

www.DataSheet4U.com



PRV/Leg	2,000V	4,000V	6,000V	8,000V	10,000V	12,000V
Type No.	HVPF2	HVPF4	HVPF6	HVPF8	HVPF10	HVPF12

ELECTRICAL CHARACTERISTICS @ 25 °C UNLESS OTHERWISE SPECIFIED	HVPF2-6	HVPF8-12
Average Forward Current	0.75Amps	0.3Amps
Max.Forward Vdtage Drop @ 0.8 Amp	6.0Volts	12.0Volts
Max. DC Reverse Current @ PR V	2.0 μ A	2.0 μ A
Max. Peak Surge Current (8.3 ms)	15 Amps	8 Amps
Ambient Operating T emperature	-55 to +150 °C	-55 to +150 °C
Storage Temperature Range	-55 to +150 °C	-55 to +150 °C

EDI reserves the right to change these specifications at any time without notice.

FIG.1
OUTPUT CURRENT vs AMBIENT TEMPERATURE

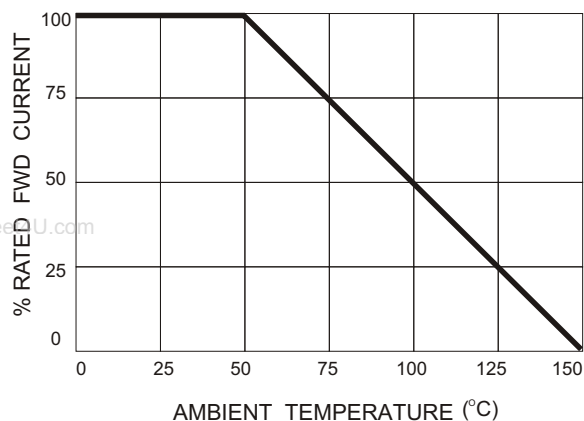


FIG.2
NON- REPETITIVE SURGE CURRENT


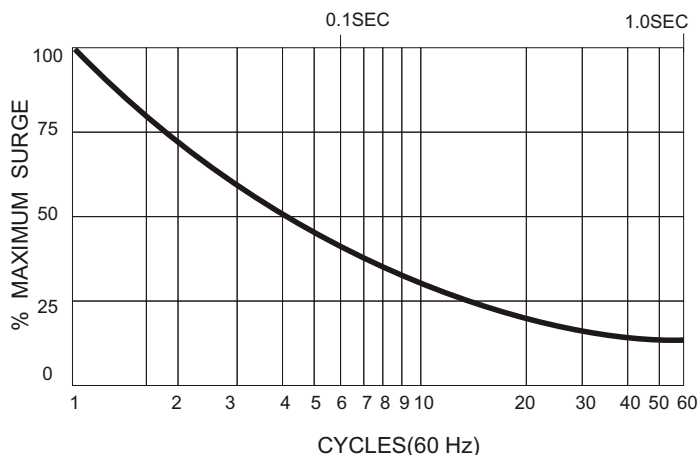


FIG.3
MECHANICAL

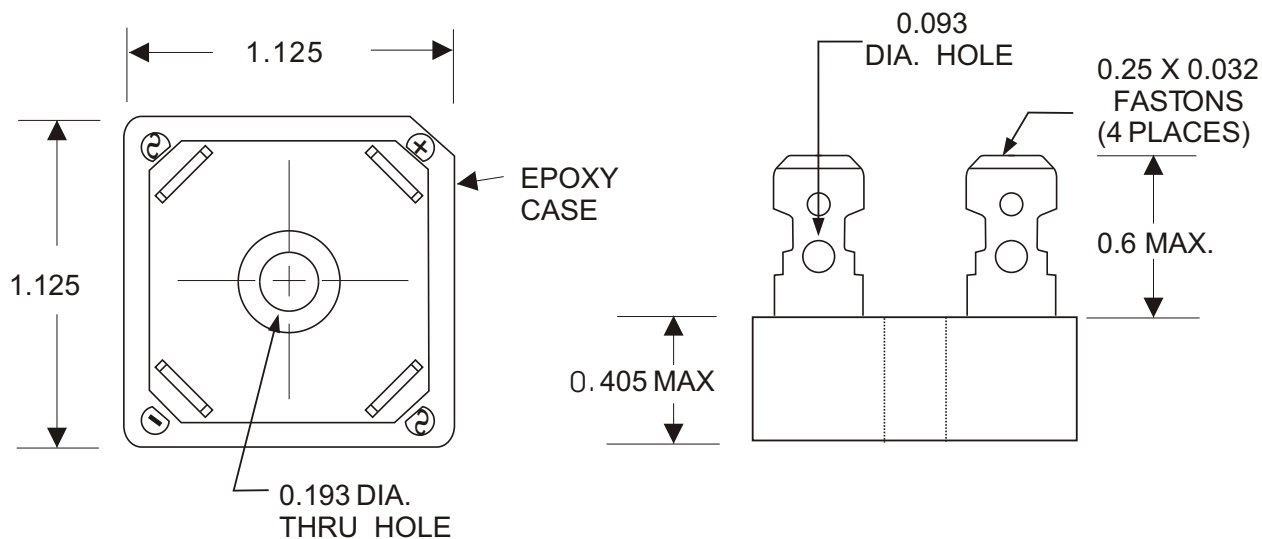

ELECTRONIC DEVICES, INC. DESIGNERS AND MANUFACTURERS OF SOLID STATE DEVICES SINCE 1951.
21 GRAY OAKS AVENUE * YONKERS, NEW YORK 10710 914-965-4400 * FAX 914-965-5531 * 1-800-678-0828
e-mail:sales@edidiodes.com * website: <http://www.edidiodes.com>