



OUTLINE DIMENSIONS

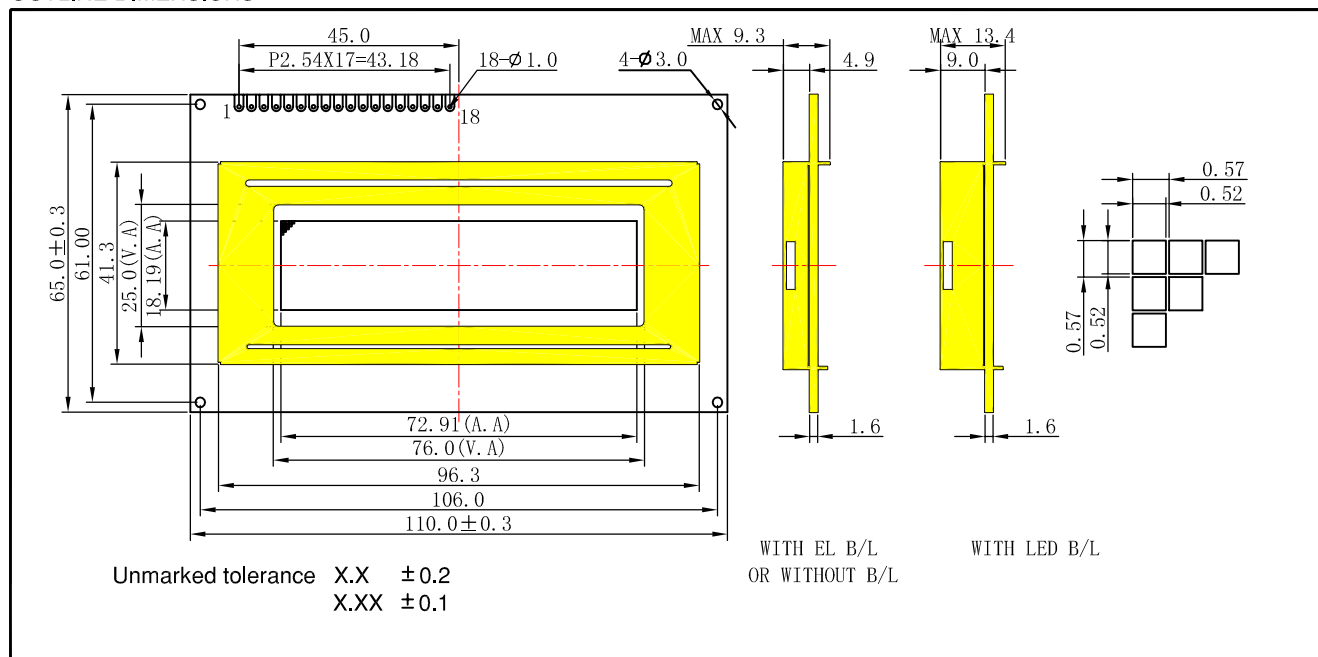

BLOCK DIAGRAM & POWER SUPPLY

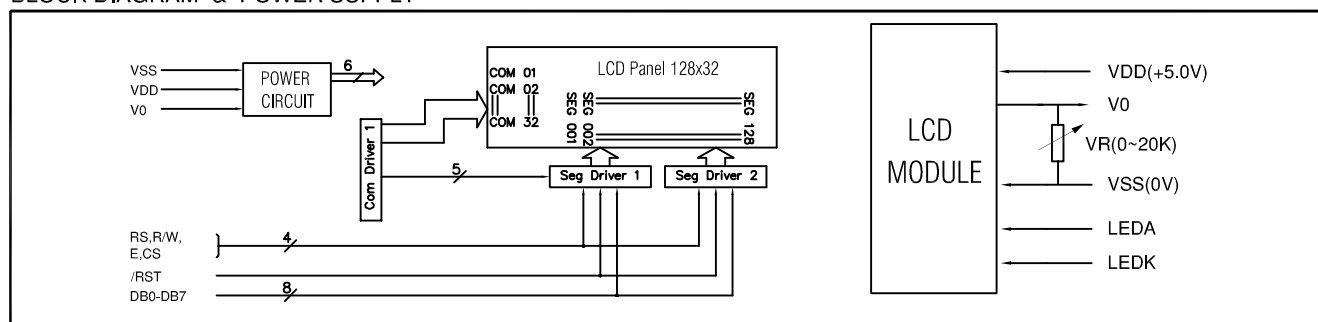

MECHANICAL SPECIFICATIONS & FEATURE

Item	Normal Dimensions(mm)	FEATURE	
Module Size (W*H*T)	110.0X65.0X9.3/13.4	LCD Type	STN、FSTN
View Area (W*H)	76.0X25.0	LCD Colour	STN:Yellow-Green、Gray FSTN:Gray
DotsxDots (W*H)	128X32	View Angle	6 O'clock、12 O'clock
Dot Pitch (W*H)	0.57X0.57	Display Type	Positive Type、Negative Type
Dot Size (W*H)	0.52X0.52	Rear polarizer	Transmissive、Reflective、Transflective
---	---	Operating Temperature	0°C ~ 50°C、-20°C ~ 70°C
---	---	Backlight	LED:Yellow EL:Green、Blue-Green、Blue Without

ELECTRICAL CHARACTERISTICS

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Operating Voltage	Vdd	Ta=25° C	---	5.0	---	V
Operating Voltage for LCD	Vlcd	Ta=25° C	---	5.0	---	V
Supply Current	Idd	Ta=25° C, Vdd=5.0V	---	2.0	3.0	mA
Supply Current for Backlight(LED)	If	Ta=25° C, Vf=4.2V	---	280	---	mA

INTERFACE PIN CONNECTIONS

Pin No	Symbol	Level	Description
1	LEDK	--	Power supply for Backlight(-)
2	LEDA	--	Power supply for Backlight(+)
3	V0	--	Power supply for LCD drive
4	VDD	--	Power supply for Logic(+5.0V)
5	VSS	--	Ground for Logic
6	E	H/H→L	Enable signal for LCM
7	RS	H/L	Register selection (H:Data register, L:Instruction register)
8	R/W	H/L	Read/write selection (H:Read, L:Write)
9	CS	H/L	Chip select(L:left half panel,H:right half panel)
10	/RST	L	Reset signal
11-18	DB0-DB7	H/L	Data Bus Lines

REMARK

Operating voltage option: 5.0V or 3.0V

Negative type LCD colour: Blue