



HY2333

Datasheet

16mA Low-Power Low-Dropout Regulator

Table of Contents

1. FEATURES	4
2. PIN DEFINITION	4
3. APPLICATION CIRCUIT	5
4. FUNCTION OUTLINE	5
5. ELECTRICAL CHARACTERISTICS	6
6. ORDERING INFORMATION	7
7. PACKAGE INFORMATION.....	8
7.1. SOT-23-6 Outline	8
8. REVISION RECORD.....	9

Attention :

1. HYCON Technology Corp. reserves the right to change the content of this datasheet without further notice. For most up-to-date information, please constantly visit our website: <http://www.hycontek.com> .
2. HYCON Technology Corp. is not responsible for problems caused by figures or application circuits narrated herein whose related industrial properties belong to third parties.
3. Specifications of any HYCON Technology Corp. products detailed or contained herein stipulate the performance, characteristics, and functions of the specified products in the independent state. We does not guarantee of the performance, characteristics, and functions of the specified products as placed in the customer's products or equipment. Constant and sufficient verification and evaluation is highly advised.
4. Please note the operating conditions of input voltage, output voltage and load current and ensure the IC internal power consumption does not exceed that of package tolerance. HYCON Technology Corp. assumes no responsibility for equipment failures that resulted from using products at values that exceed, even momentarily, rated values listed in products specifications of HYCON products specified herein.
5. Notwithstanding this product has built-in ESD protection circuit, please do not exert excessive static electricity to protection circuit.
6. Products specified or contained herein cannot be employed in applications which require extremely high levels of reliability, such as device or equipment affecting the human body, health/medical equipments, security systems, or any apparatus installed in aircrafts and other vehicles.
7. Despite the fact that HYCON Technology Corp. endeavors to enhance product quality as well as reliability in every possible way, failure or malfunction of semiconductor products may happen. Hence, users are strongly recommended to comply with safety design including redundancy and fire-precaution equipments to prevent any accidents and fires that may follow.
8. Use of the information described herein for other purposes and/or reproduction or copying without the permission of HYCON Technology Corp. is strictly prohibited.

1. Features

The HY2333 operates as a fixed-output, low-dropout regulator with low power consumption. The device has an output tolerance of 2.5% and is capable of delivering 16mA continuous load current. Overcurrent protection is included.

Key Features


- $\pm 2.5\%$ Output Accuracy
- Low Dropout: 320mV at 16mA Full Load Typically
- Wide Input Voltage Range: 4V to 35V
- Fixed Output Voltage : 3.3V
- Low Quiescent Current: 2.5uA
- Stable with Low-ESR Capacitors
- Overcurrent Protection 125mA
- SOT-23-6 Package

2. Pin Definition

SOT-23-6 PIN DESCRIPTION

PIN	TYPE ⁽¹⁾	NAME	DESCRIPTION
1	P	VSS	Device Ground.
3	P	REGOUT	Regulated Power Output. A 3.3V regulated voltage output. Connect a 10uF ceramic capacitor to VSS.
5	P	REGIN	Power Supply. Connect to battery positive terminal. Connect a 10uF ceramic capacitor to VSS.
Others	-	NC	Not connect.


NOTE: (1) P = POWER CONNECTION



2333 : Product Name


XXXX : Date Code

3. Application Circuit

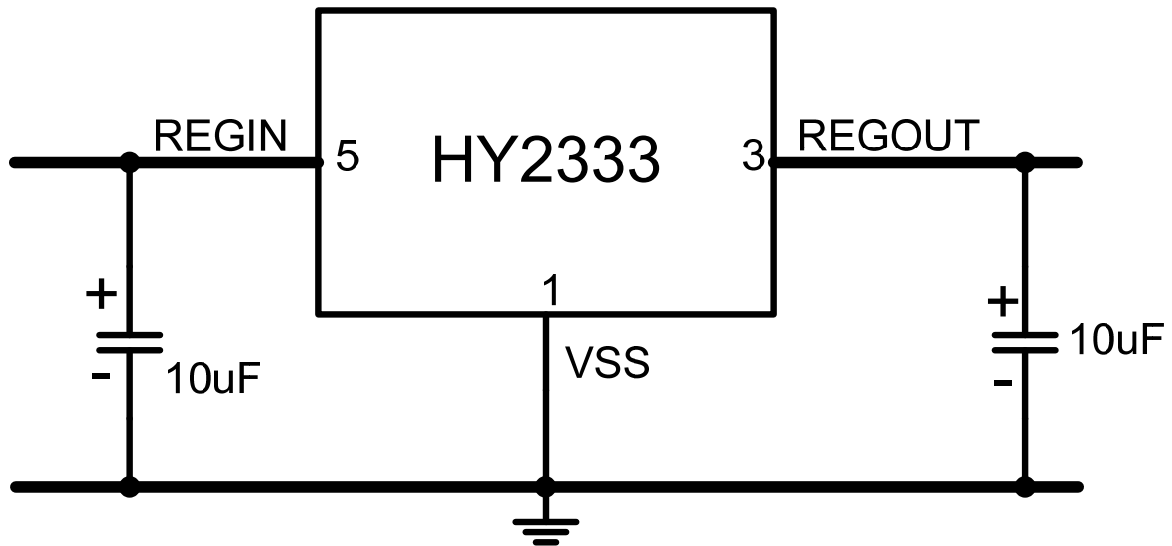

4. Function Outline

The HY2333 operates as a fixed-output, low-dropout regulator with low power consumption. The device has an output tolerance of 2.5% and is capable of delivering 16mA continuous load current. Overcurrent protection is included. The maximum regulator input voltage is 35V.

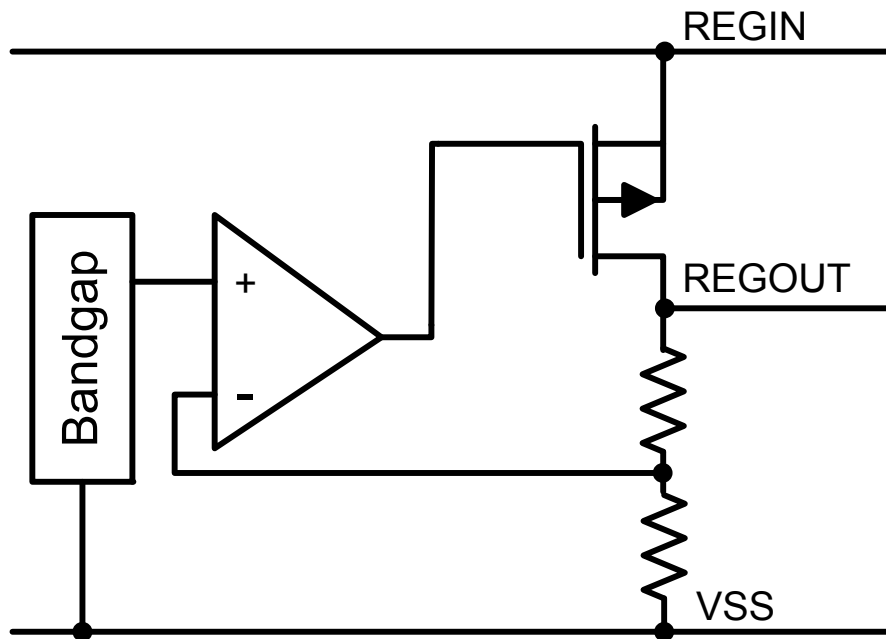

Block Diagram

5. Electrical Characteristics

ABSOLUTE MAXIMUM RATINGS

Voltage on REGIN pin relative to VSS	−0.4V to 40V
Voltage on REGOUT pin relative to VSS	−0.4V to 7V
Functional Temperature Range	−40°C to +100°C
Storage Temperature Range	−65°C to +150°C
Soldering Temperature (10 sec)	+260°C

* This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

ELECTRICAL CHARACTERISTICS

($V_{\text{REGIN}} = 4\text{V to } 35\text{V}$. $I_{\text{L}} = 1\text{mA}$. $C_{\text{REGIN}} = 10\mu\text{F}$. $C_{\text{REGOUT}} = 10\mu\text{F}$. $T_{\text{A}} = -40^{\circ}\text{C to } +85^{\circ}\text{C}$. Unless otherwise noted, typical values are at $T_{\text{A}} = 25^{\circ}\text{C}$ and $V_{\text{REGIN}} = 7.2\text{V}$.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Voltage	V_{REGIN}		4		35	V
Regulator Output Voltage	V_{REG}	$I_{\text{L}} \leq 3\text{mA}$.	3.3V – 1.5%		3.3V+ 1.5%	V
		$4\text{V} \leq V_{\text{REGIN}} \leq 20\text{V}$. $3\text{mA} \leq I_{\text{REGOUT}} \leq 16\text{mA}$.	3.3V – 2.5%		3.3V+ 2.5%	
		$4\text{V} \leq V_{\text{REGIN}} \leq 20\text{V}$. $3\text{mA} \leq I_{\text{REGOUT}} \leq 16\text{mA}$. $T_{\text{A}} = -40^{\circ}\text{C to } +85^{\circ}\text{C}$.	3.3V – 3.5%		3.3V+ 3.5%	
Regulator Dropout Voltage	V_{DO}	$V_{\text{REGOUT}} = 3.3\text{V}$. $I_{\text{REGOUT}} \leq 16\text{mA}$. $T_{\text{A}} = -40^{\circ}\text{C to } +85^{\circ}\text{C}$.		320	500	mV
		$V_{\text{REGOUT}} = 3.3\text{V}$. $I_{\text{REGOUT}} \leq 3\text{mA}$. $T_{\text{A}} = -40^{\circ}\text{C to } +85^{\circ}\text{C}$.		65	100	
Regulator Output Change with Temperature	$\Delta V_{\text{REG,TEM}}$ P	$I_{\text{REGOUT}} = 16\text{mA}$. $T_{\text{A}} = -40^{\circ}\text{C to } +85^{\circ}\text{C}$.		1		%

Line Regulation	$\Delta V_{\text{REG,LIN}}$ E	$4V \leq V_{\text{REGIN}} \leq 20V.$ $I_{\text{REGOUT}} = 16\text{mA}.$		11	25	mV
Load Regulation	$\Delta V_{\text{REG,LOA}}$	$V_{\text{REGIN}} = 9.0V.$ $0.2\text{mA} \leq I_{\text{REGOUT}} \leq 3\text{mA}.$		20	40	mV
	D	$V_{\text{REGIN}} = 9.0V.$ $3\text{mA} \leq I_{\text{REGOUT}} \leq 16\text{mA}.$		20	40	
Short Circuit Current Limit	I_{SHORT}	$V_{\text{REGOUT}} = 0V.$ $T_A = -40^\circ\text{C to } +85^\circ\text{C}.$		125		mA
Supply Current	I_{CC}			2.5	4	μA

6. Ordering Information

■ Product name definition

HY2333—B





Package type
B: SOT-23-6



7. Package Information

7.1. SOT-23-6 Outline

Note: All dimensions are in millimeters.

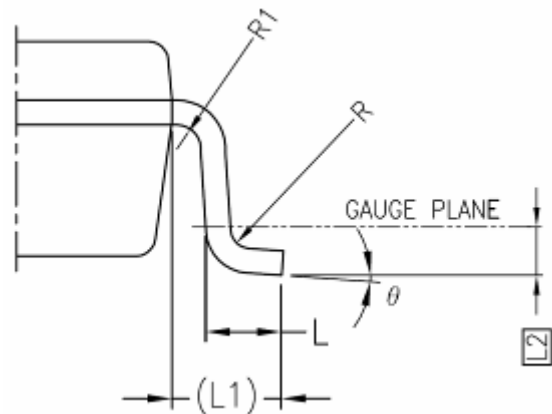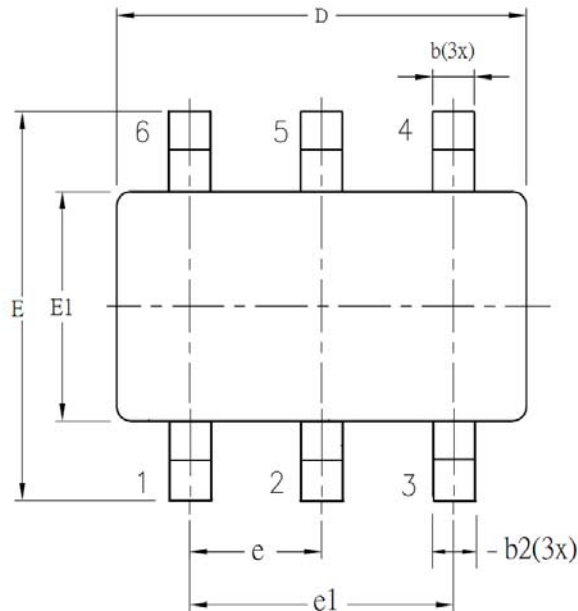

SYM BOL	ALL DIMENSIONS IN MILLIMETERS		
	MINIMUM	NOMINAL	MAXIMUM
A	-	1.30	1.40
A1	0	-	0.15
A2	0.90	1.20	1.30
b	0.30	-	0.50
b1	0.30	0.40	0.45
b2	0.30	0.40	0.50
c	0.08	-	0.22
c1	0.08	0.13	0.20
D	2.90 BSC		
E	2.80 BSC		
E1	1.60 BSC		
e	0.95 BSC		
e1	1.90 BSC		
L	0.30	0.45	0.60
L1	0.60 REF		
L2	0.25 BSC		
R	0.10	-	-
R1	0.10	-	0.25
θ	0°	4°	8°
$\theta 1$	5°	-	15°
$\theta 2$	5°	-	15°

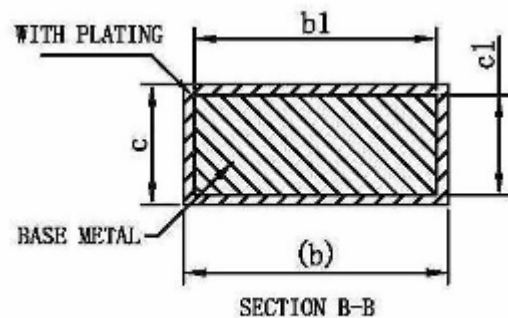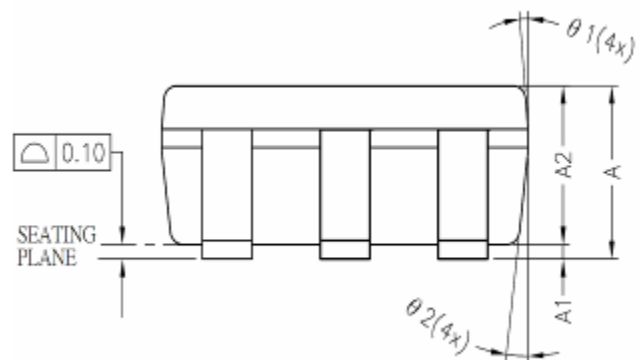

8. Revision Record

Major differences are stated thereafter:

Version	Page	Revision Summary
01	All	New version
02	All	Key Features upgrade.