

1.SCOPE


HAODA's SAW filter series have broad line up products meeting all broadcast standard including NTSC,PAL and SECAM systems. These filters are composed of two interdigital transducers on a single-crystal, piezoelectrical chip. they are used in electronic equipments such as TV and so on.

2. Construction

2.1 Dimension and materials


Manufacturer's name : HAODA ELECTRONICS Co. LTD(CHINA)

Type : IF389A1M

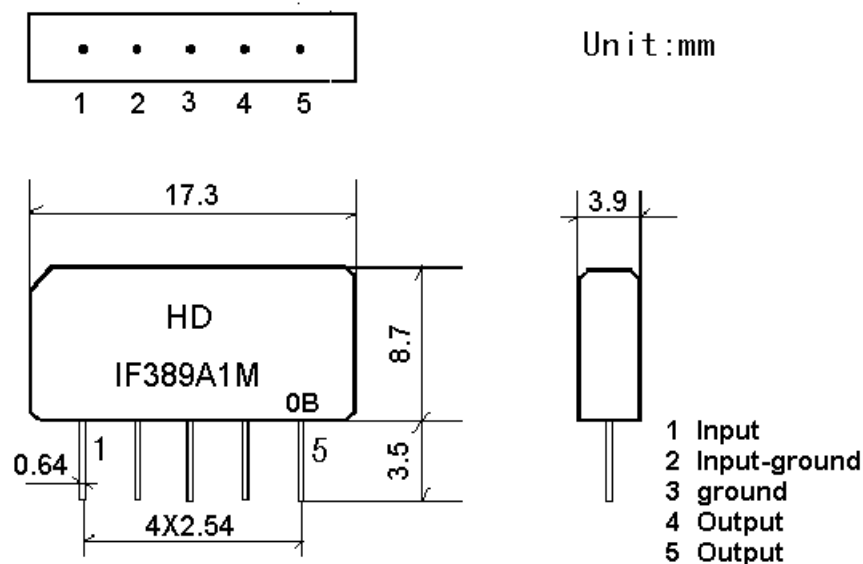

0: year(0,1,2,3,4,5,6,7,8,9)

B:product in this quarter(A:1~3,B:4~6,C:7~9,D:10~12)

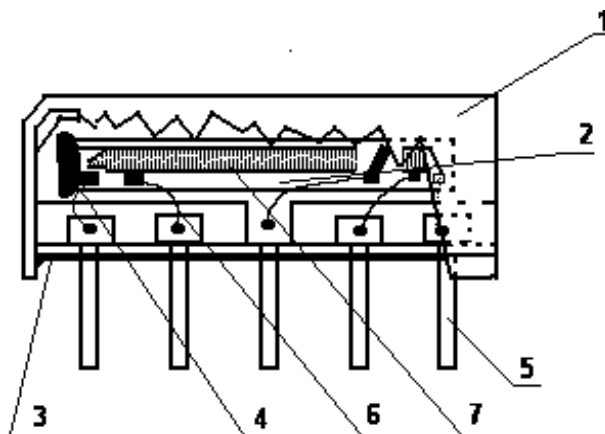

Components	Materials
1.Outer casing	PPS
2.Substrate	Lithium niobate
3.Base	Epoxy resin
4.Absorber	Epoxy resin
5.Lead	Cu alloy+Au plate
6.Bonding wire	AlSi alloy
7.Electrode	Al

[illegible]

Input impedance of the symmetrical post-amplifier: $2\text{ k}\Omega$ in parallel with 3 pF

Standard atmospheric conditions

Ambient temperature : 15°C to 35°C
Relative humidity : 25% to 85%
Air pressure : 86kPa to 106kPa

Operating temperature rang is the rang of ambient temperatures in which the filter can be operated continuously. -10°C ~ +60°C

Storage temperature rang is the rang of ambient temperatures at which the filter can be stored without damage.

Reference temperature +25°C

3.1 Maximum Rating

DC voltage	VDC	12	V	Between any terminals
AC voltage	Vpp	10	V	Between any terminals

3.2 Electrical Characteristics

Source impedance $Z_s=50\Omega$

Load impedance $Z_L=2K\Omega//3pF$ $T_A=25^\circ C$

	Freq	Min	typ	max	
Insertion attenuation Reference level	37.40MHz	13.5	15.5	17.5	dB
Relative attenuation	38.90MHz	5.5	6.5	7.5	dB
	34.47MHz	1.2	2.7	4.2	dB
	33.40MHz	17.0	19.0	21.0	dB
	31.90MHz	42.0	50.0	-	dB
	40.40MHz	42.0	55.0		dB
	41.40MHz	40.0	50.0		dB
Sidelobe	25.00~31.90MHz	34.0	40.0		dB
	40.40~45.00MHz	33.0	38.0		dB
Reflected wave signal suppression 1.2 μs ...6.0 μs after main pulse (test pulse 250ns, carrier frequency 37.4MHz)		40.0	50.0		dB
Feedthrough signal suppression 1.2 μs ...1.1 μs before main pulse (test pulse 250ns, carrier frequency 37.4MHz)		42.0	52.0	-	dB
Group delay predistortion (reference frequency 38.90 MHz)					
36.90 MHz		-	-40	-	ns
34.47 MHz		-	80	-	ns
Impedance at 37.40 MHz:					
Input: $Z_{in} = R_{in} // C_{in}$		-	2.6//9.5	-	k Ω //pF
Output: $Z_{out}=R_{out} // C_{out}$		-	2.9 //2.6	-	k Ω //pF
Temperature coefficient		-72			ppm/k

3.3 Environmental Performance Characteristics


Item Test condition	Allowable change of absolute Level at center frequency(dB)
High temperature test 70°C 1000H	< 1.0
Low temperature test -40°C 1000H	< 1.0
Humidity test 40°C 90-95% 1000H	< 1.0
Thermal shock -20°C==25°C==80°C 20 cycle 30M 10M 30M	< 1.0
Solder temperature test Sold temp.260°C for 10 sec.	< 1.0

Soldering Immerse the pins melt solder at 260°C+5/-0°C for 5 sec.	More then 95% of total area of the pins should be covered with solder
---	---

3.4 Mechanical Test


Item Test condition	Allowable change of absolute Level at center frequency(dB)
Vibration test 600-3300rpm amplitude 1.5mm 3 directions 2 H each	<1.0
Drop test On maple plate from 1 m high 3 times	<1.0
Lead pull test Pull with 1 kg force for 30 seconds	<1.0
Lead bend test 90° bending with 500g weigh 2 times	<1.0

3.5 Voltage Discharge Test


Item Test condition	Allowable change of absolute Level at center frequency(dB)
Surge test Between any two electrode 	<1.0

3.6 Frequency response

CH2 S21 log MAG 10 dB/ REF -15.5 dB 4: -8.7449 dB

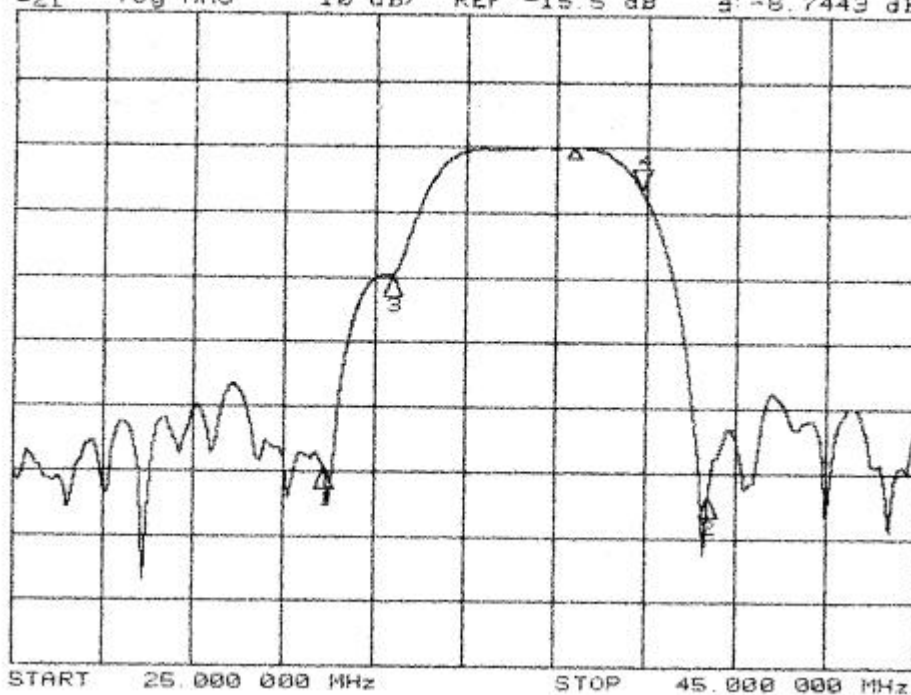


CH1 S21 log MAG 1 dB/ REF -15.5 dB 3: -15.386 dB
CH2 S21 delay 30 ns/ REF 825.9 ns 3 684.67 ns

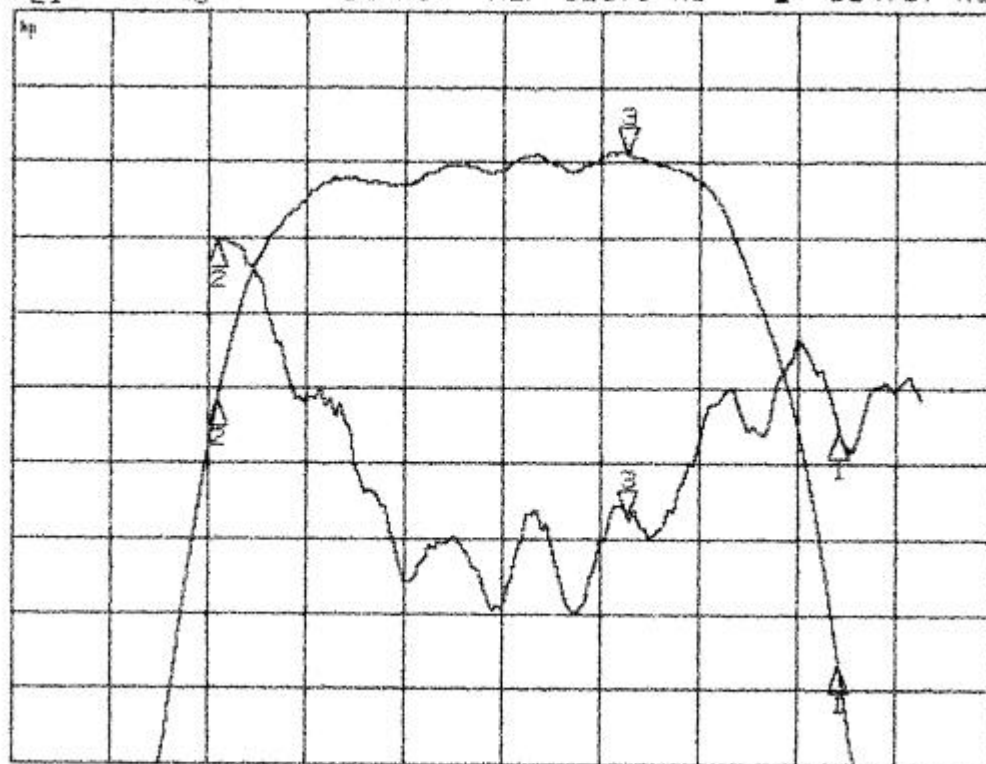

CENTER 36.500 000 MHz SPAN 7.000 000 MHz

CH2 S21 log MAG 10 dB/ REF -15.5 dB

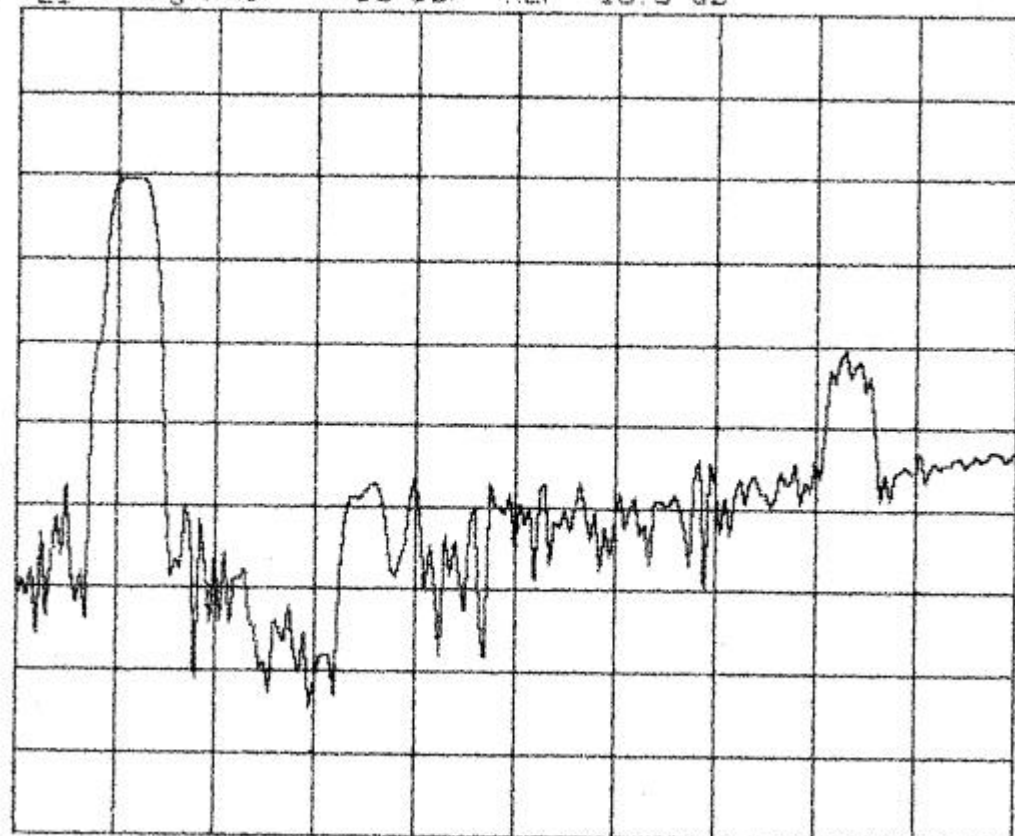

START 25.000 000 MHz

STOP 125.000 000 MHz