

IP4853CX24

SD, MMC and microSD memory card integrated level shifter
with PSU, EMI filter and ESD protection

Rev. 02 — 15 June 2009

Product data sheet

1. Product profile

1.1 General description

The IP4853CX24 is a device that fully integrates a bidirectional level shifter or voltage translator, EMI filter and ESD protection diodes. It is specifically designed to be used for memory card interfaces such as SD, microSD and MultiMediaCard (MMC) memory cards.

The integrated power supply unit supplies memory cards with 2.9 V directly from the battery. This enables a 1.8 V operating host-side device (e.g. a processor interface) to communicate with a 2.9 V compliant memory card using its integrated level shifter. Radiation from digital signals in the higher harmonics, close to typical mobile phone frequencies, is suppressed by the EMI filter.

The IP4853CX24 is fabricated using monolithic silicon technology in a Wafer Level Chip-Scale Package (WLCSP) with 0.4 mm pitch.

1.2 Features

- Dark Green compliant.
- Pb-free, RoHS compliant
- Integrated EMI filters
- Feedback channel for clock synchronization
- Integrated ESD protection according to IEC 61000-4-2, level 4
- WLCSP with 0.4 mm pitch

1.3 Applications

- SD memory card, microSD memory card and MMC interfaces in latest electronic appliances such as:
 - ◆ Mobile phone or smart phone
 - ◆ Digital camera
 - ◆ Card reader in (laptop) computer
- Appliances requiring one or several of the following features:
 - ◆ Level shifting and voltage translation from 1.8 V to 2.9 V and from 2.9 V to 1.8 V
 - ◆ ESD protection according to IEC 61000-4-2, level 4
 - ◆ Power supply regulation from battery to 2.9 V card memory voltage
 - ◆ EMI filtering
 - ◆ Integration of interface-specific biasing resistor network

2. Pinning information

2.1 Pinning

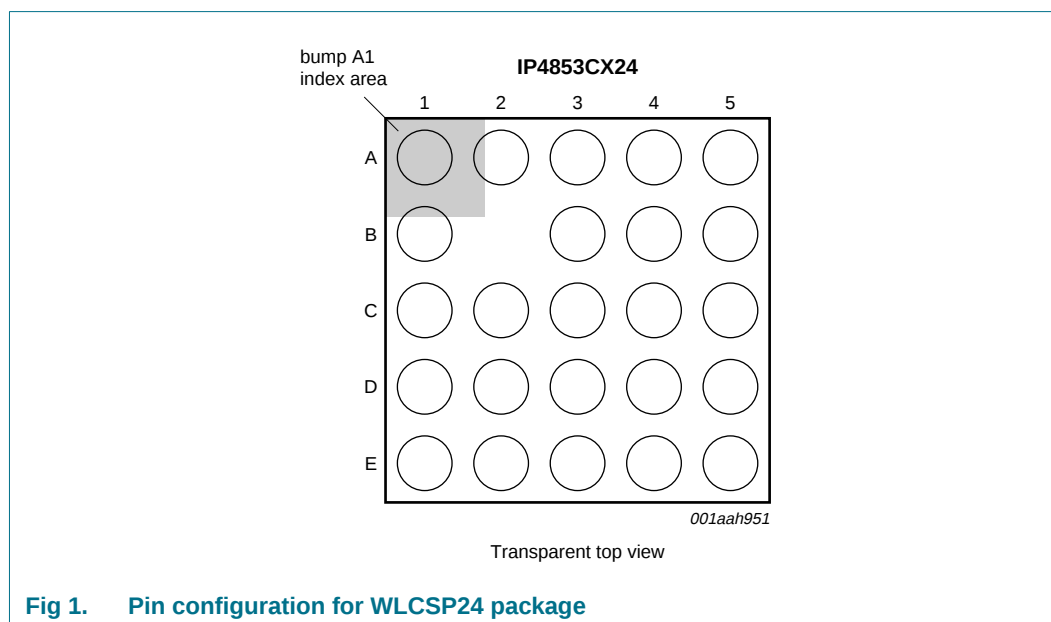


Table 1. Pin allocation table

Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol
A1	DATA2_H	A2	DIR_CMD	A3	DIR_0	A4	V _{BAT}	A5	DATA2_SD
B1	DATA3_H	B2	n.c.	B3	V _{CC}	B4	VSD	B5	DATA3_SD
C1	CLK_IN	C2	ENABLE	C3	GND	C4	GND	C5	CLK_SD
D1	DATA0_H	D2	CMD_H	D3	CD	D4	CMD_SD	D5	DATA0_SD
E1	DATA1_H	E2	CLK_FB	E3	DIR_1_3	E4	WP	E5	DATA1_SD

2.2 Pin description

Table 2. Pin description

Symbol ^[1]	Pin	Type ^[2]	Description
DATA2_H	A1	I/O	data 2 input or output on host-side
DIR_CMD	A2	I	direction control input for command
DIR_0	A3	I	direction control input for data 0
V _{BAT}	A4	S	supply voltage from battery for regulator
DATA2_SD	A5	I/O	data 2 input or output on memory card-side
DATA3_H	B1	I/O	data 3 input or output on host-side
n.c.	B2	-	not connected
V _{CC}	B3	S	supply voltage for host-side circuits
VSD	B4	O	output supply voltage for memory card
DATA3_SD	B5	I/O	data 3 input or output on memory card-side
CLK_IN	C1	I	clock signal input

Table 2. Pin description ...continued

Symbol ^[1]	Pin	Type ^[2]	Description
ENABLE	C2	I	device enable input
GND	C3	S	supply ground
GND	C4	S	supply ground
CLK_SD	C5	O	clock signal output on memory card-side
DATA0_H	D1	I/O	data 0 input or output on host-side
CMD_H	D2	I/O	command input or output on host-side
CD	D3	O	card detect switch biasing output
CMD_SD	D4	I/O	command input or output on memory card-side
DATA0_SD	D5	I/O	data 0 input or output on memory card-side
DATA1_H	E1	I/O	data 1 input or output on host-side
CLK_FB	E2	O	clock feedback output to host
DIR_1_3	E3	I	direction control input for data 1, data 2 and data 3
WP	E4	O	write protect switch biasing output
DATA1_SD	E5	I/O	data 1 input or output on memory card-side

[1] The pin names relate particularly to SD memory cards, but also apply to microSD and MMC memory cards.

[2] I = input, O = output, I/O = input and output, S = power supply.

3. Ordering information

Table 3. Ordering information

Type number	Package		
	Name	Description	Version
IP4853CX24	WLCSP24	wafer level chip-size package; 24 bumps; 2.01 × 2.01 × 0.61 mm	IP4853CX24

4. Block diagram

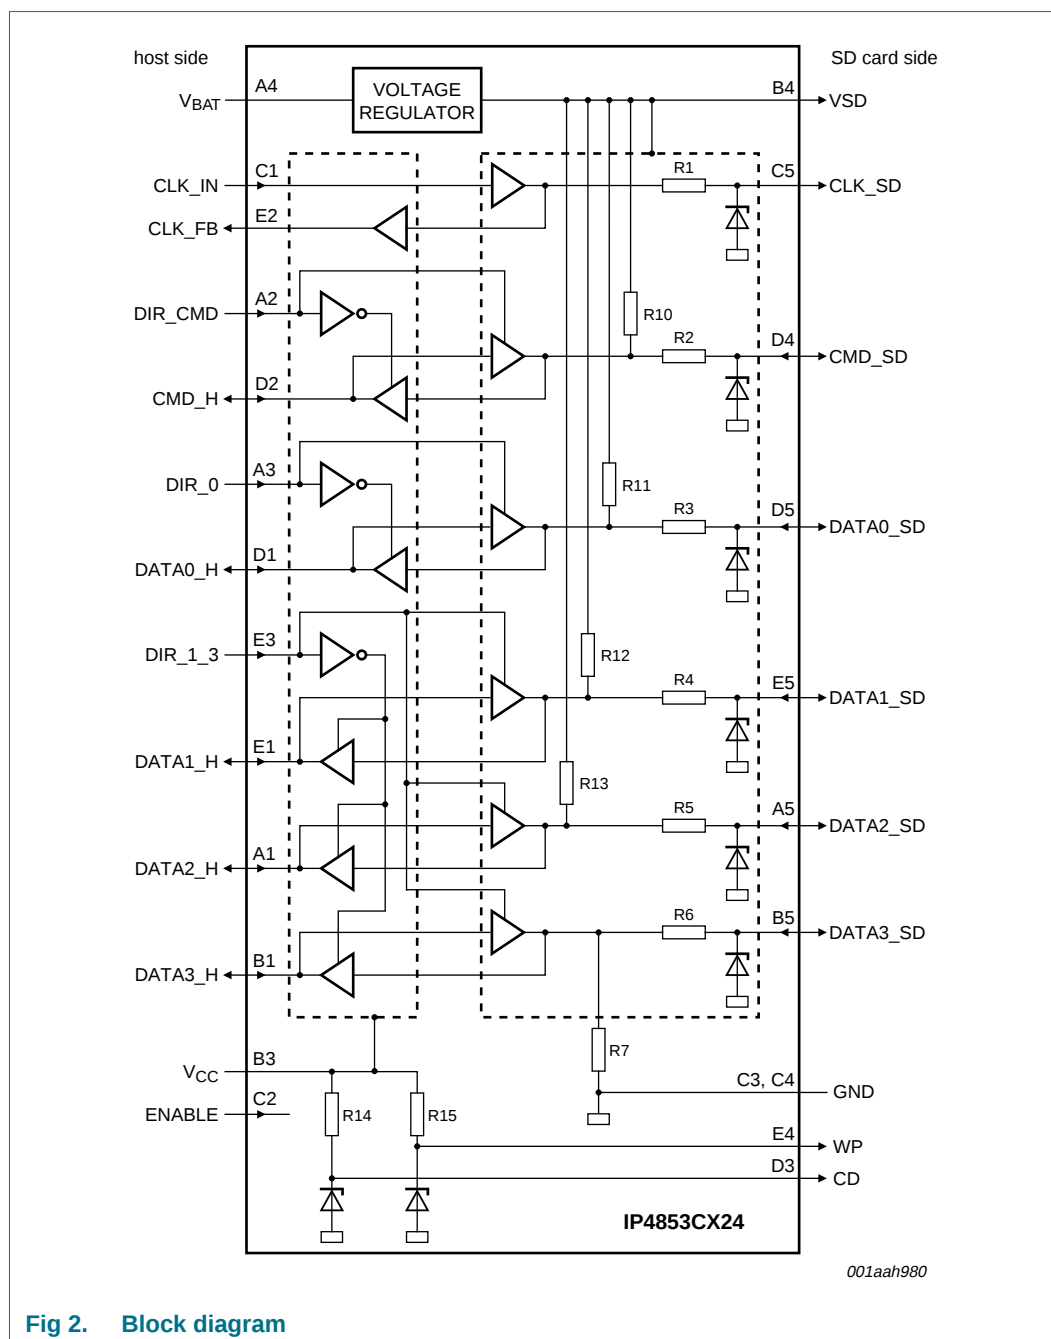


Fig 2. Block diagram

5. Functional description

5.1 Logic control signals

Table 4. Control signal truth table

$V_{BAT} \geq 2.7\text{ V}$.

Control		Host-side		Memory card-side	
Pin	Level ^[1]	Pin	Function	Pin	Function
Pin ENABLE = HIGH and $V_{CC} \geq 1.62\text{ V}$					
DIR_CMD	H	CMD_H	input	CMD_SD	output
	L	CMD_H	output	CMD_SD	input
DIR_0	H	DATA0_H	input	DATA0_SD	output
	L	DATA0_H	output	DATA0_SD	input
DIR_1_3	H	DATA1_H, DATA2_H, DATA3_H	input	DATA1_SD, DATA2_SD, DATA3_SD	output
	L	DATA1_H, DATA2_H, DATA3_H	output	DATA1_SD, DATA2_SD, DATA3_SD	input
-	-	CLK_FB	output	CLK_SD	output
Pin ENABLE = LOW or $V_{CC} \leq 0.8\text{ V}$					
DIR_CMD	X	CMD_H	high-Z	CMD_SD	high-Z
DIR_0	X	DATA0_H	high-Z	DATA0_SD	high-Z
DIR_1_3	X	DATA1_H, DATA2_H, DATA3_H	high-Z	DATA1_SD, DATA2_SD, DATA3_SD	high-Z
-	-	CLK_FB	high-Z	CLK_SD	high-Z

[1] H = HIGH; L = LOW and X = don't care.

6. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage		-0.5	+3.5	V
V_{BAT}	battery supply voltage	4 ms transient	-0.5	+5.5	V
		operating	-0.5	+5.0	V
V_I	input voltage	at I/O pins			
		4 ms transient	-0.5	+5.5	V
		operating	-0.5	+5.0	V
P_{tot}	total power dissipation	$T_{amb} = -30\text{ °C to }+70\text{ °C}$	-	550	mW
T_{stg}	storage temperature		-55	+150	°C
T_{amb}	ambient temperature		-30	+85	°C
V_{ESD}	electrostatic discharge voltage	pin V_{BAT} and all memory card-side pins to ground; according to IEC 61000-4-2, level 4			
		contact	-	±8000	V
		air discharge	-	±15000	V
		all other pins to ground; according to IEC 61340-3-1, human body model	-	±2000	V

7. Recommended operating conditions

Table 6. Operating conditions

Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage		1.62	2.1	V
V_{BAT}	battery supply voltage		2.7 ^[1]	5.0	V
V_I	input voltage	host-side	0	2.1	V
		memory card-side; $V_{BAT} \geq 3.2\text{ V}$	0	2.9	V
V_O	output voltage	active mode; pin ENABLE = HIGH			
		host-side	0	V_{CC}	V
		memory card-side	0	$V_{O(reg)}$	V
$\Delta t/\Delta V$	time difference over voltage change	host-side; between $0.2V_{CC}$ and $0.7V_{CC}$	-	2	ns/V
		memory card-side; between $0.2V_{O(reg)}$ and $0.7V_{O(reg)}$	-	2	ns/V

[1] The device is still fully functional, but the voltage on pin VSD might drop below the recommended memory card supply voltage.

8. Static characteristics

Table 7. Static characteristics

At recommended operating conditions; $T_{amb} = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$; voltages are referenced to GND (ground = 0 V); unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ ^[1]	Max	Unit
Voltage regulator output: pin VSD						
$V_{O(\text{reg})}$	regulator output voltage	$C_L = 1\ \mu\text{F}$				
		$I_{O(\text{reg})} = 0\ \text{A}$	-	2.9	2.987	V
		$I_{O(\text{reg})} = 200\ \text{mA}$; $V_{\text{BAT}} \geq 2.9\ \text{V}$	2.75	-	-	V
$\Delta V_{\text{do}(\text{reg})}$	regulator dropout voltage variation	$I_{O(\text{reg})} = 200\ \text{mA}$	-	-	150	mV
$I_{O(\text{reg})}$	regulator output current		-	200	-	mA
$I_{O(\text{sc})}$	short-circuit output current		-	-	500	mA
$I_{q(\text{reg})}$	regulator quiescent current	pin ENABLE = HIGH (active mode)	-	-	200	μA
		pin ENABLE = LOW (not active mode)	-	-	2	μA
C_{ext}	external capacitance	recommended capacitor at pin VSD	-	1.0	-	μF
Control and data inputs						
Host-side: pins ENABLE, DIR_0, DIR_1_3, DIR_CMD, CLK_IN and DATA0_H to DATA3_H						
V_{IH}	HIGH-level input voltage		$0.65 \times V_{\text{CC}}$	-	-	V
V_{IL}	LOW-level input voltage		-	-	0.3	V
C_{ch}	channel capacitance	$V_{\text{I}} = 0\ \text{V}$; $f_{\text{i}} = 1\ \text{MHz}$	^[2] -	-	20	pF
Memory card-side: pins CMD_SD and DATA0_SD to DATA3_SD						
V_{IH}	HIGH-level input voltage		$0.65 \times V_{O(\text{reg})}$	-	-	V
V_{IL}	LOW-level input voltage		-	-	0.3	V
C_{ch}	channel capacitance	$V_{\text{I}} = 0\ \text{V}$; $f_{\text{i}} = 1\ \text{MHz}$	^[2] -	-	20	pF
Control and data outputs						
Host-side: pins CLK_FB, CMD_H and DATA0_H to DATA3_H						
V_{OH}	HIGH-level output voltage	$I_{\text{O}} = -3\ \text{mA}$; $V_{\text{I}} = V_{\text{IH}}$	$V_{\text{CC}} - 0.45$	-	-	V
V_{OL}	LOW-level output voltage	$I_{\text{O}} = 3\ \text{mA}$; $V_{\text{I}} = V_{\text{IL}}$	-	-	0.45	V
Memory card-side: pins CLK_SD, CMD_SD and DATA0_SD to DATA3_SD, CD and WP						
V_{OH}	HIGH-level output voltage	$I_{\text{O}} = -6\ \text{mA}$; $V_{\text{I}} = V_{\text{IH}}$	$V_{O(\text{reg})} - 0.45$	-	-	V
V_{OL}	LOW-level output voltage	$I_{\text{O}} = 6\ \text{mA}$; $V_{\text{I}} = V_{\text{IL}}$	-	-	0.45	V
I_{LRzd}	Zener diode reverse leakage current	$V_{\text{I}} = 3\ \text{V}$	-	-	100	nA
R_{s}	series resistance	R1 to R6; tolerance $\pm 20\ \%$	32	40	48	Ω
R_{pd}	pull-down resistance	R7; tolerance $\pm 30\ \%$	329	470	611	k Ω
R_{pu}	pull-up resistance	R10; tolerance $\pm 30\ \%$	10.5	15	19.5	k Ω
		R11 to R13; tolerance $\pm 30\ \%$	49	70	91	k Ω
		R14 and R15; tolerance $\pm 30\ \%$	70	100	130	k Ω

[1] Typical values are measured at $T_{amb} = 25^{\circ}\text{C}$.


[2] EMI filter line capacitance per data channel from I/O pin to driver; C_{ch} is guaranteed by design.

9. Dynamic characteristics

Table 8. Voltage regulator

$T_{amb} = 25\text{ }^{\circ}\text{C}$; unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Voltage regulator output: pin VSD						
PSRR	power supply rejection ratio	$V_{BAT} = 3.0\text{ V}$; $V_{ripple(p-p)} = 223.6\text{ mV}$ (0 dBm); $R_{source} = 50\text{ }\Omega$				
		$f_{ripple} = 1\text{ kHz}$	40	-	-	dB
		$f_{ripple} = 10\text{ kHz}$	30	-	-	dB
$t_{startup(reg)}$	regulator start-up time	$V_{CC} = 1.8\text{ V}$; $V_{BAT} = 3.0\text{ V}$; $I_{O(reg)} = 200\text{ mA}$; $C_L = 1\text{ }\mu\text{F}$; see Figure 3	-	-	200	μs

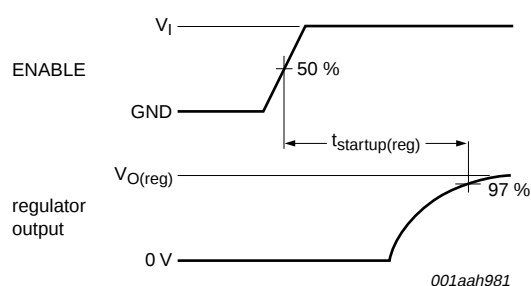

Measuring points: ENABLE signal at $0.5V_{CC}$ and regulator output signal at $0.97V_{O(reg)}$.

Fig 3. Regulator start-up time

Table 9. Frequency response of integrated EMI filters

$T_{amb} = 25\text{ }^{\circ}\text{C}$; unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Clock, command and data channels^[1]						
α_{il}	insertion loss	$R_{source} = 50\text{ }\Omega$; $C_L = 10\text{ pF}$; $R_L = 50\text{ }\Omega$				
		$f_i = 401\text{ MHz to }800\text{ MHz}$	9	-	-	dB
		$f_i = 801\text{ MHz to }1.4\text{ GHz}$	-	17	-	dB
		$f_i = 1.4\text{ GHz to }6.0\text{ GHz}$	-	32	-	dB

[1] Guaranteed by design.

Table 10. Output rise and fall times

$V_{BAT} = 3.5\text{ V}$; $V_{O(reg)} = 2.9\text{ V}$; unless otherwise specified; transition time is the same as output rise time and output fall time; see [Figure 4](#) for timing diagram and [Figure 5](#) for test circuit.


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Memory card-side outputs: pins CLK_SD, CMD_SD and DATA0_SD to DATA3_SD						
Reference points at 70 % and 20 %						
t _t	transition time	C _L = 20 pF; R _L = 100 kΩ				
		T _{amb} = +25 °C; V _{CC} = 1.8 V	-	1.5	2.5	ns
		T _{amb} = −30 °C; V _{CC} = 1.9 V	-	1.5	2.5	ns
		T _{amb} = +70 °C; V _{CC} = 1.62 V	-	1.8	2.8	ns
		C _L = 40 pF; R _L = 100 kΩ				
		T _{amb} = +25 °C; V _{CC} = 1.8 V	-	2.7	3.6	ns
		T _{amb} = −30 °C; V _{CC} = 1.9 V	-	2.7	3.6	ns
		T _{amb} = +70 °C; V _{CC} = 1.62 V	-	2.9	3.8	ns
Reference points at 90 % and 10 %						
t _t	transition time	C _L = 20 pF; R _L = 100 kΩ				
		T _{amb} = +25 °C; V _{CC} = 1.8 V	-	3.0	4.2	ns
		T _{amb} = −30 °C; V _{CC} = 1.9 V	-	2.9	4.1	ns
		T _{amb} = +70 °C; V _{CC} = 1.62 V	-	3.7	4.9	ns
Host-side outputs: pins CLK_FB, CMD_H and DATA0_H to DATA3_H						
Reference points at 70 % and 20 %						
t _t	transition time	C _L = 5 pF; R _L = 100 kΩ				
		T _{amb} = +25 °C; V _{CC} = 1.8 V	-	1.5	2.4	ns
		T _{amb} = −30 °C; V _{CC} = 1.9 V	-	1.3	2.3	ns
		T _{amb} = +70 °C; V _{CC} = 1.62 V	-	1.6	2.5	ns
		C _L = 20 pF; R _L = 100 kΩ				
		T _{amb} = +25 °C; V _{CC} = 1.8 V	-	1.7	2.9	ns
		T _{amb} = −30 °C; V _{CC} = 1.9 V	-	1.4	2.5	ns
		T _{amb} = +70 °C; V _{CC} = 1.62 V	-	1.8	3.0	ns
Reference points at 90 % and 10 %						
t _t	transition time	C _L = 5 pF; R _L = 100 kΩ				
		T _{amb} = +25 °C; V _{CC} = 1.8 V	-	2.4	3.1	ns
		T _{amb} = −30 °C; V _{CC} = 1.9 V	-	2.3	3.0	ns
		T _{amb} = +70 °C; V _{CC} = 1.62 V	-	2.5	3.2	ns

Table 11. Propagation delay of time domain response driver part

$V_{BAT} = 3.5\text{ V}$; $V_{O(reg)} = 2.9\text{ V}$; $R_{source} = 50\ \Omega$; propagation delay measurements include PCB delays and connectors; see [Figure 4](#) for timing diagram and [Figure 5](#) for test circuit.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Host-side inputs to memory card-side outputs						
t _{PD}	propagation delay	nominal case; T _{amb} = +27 °C; V _{CC} = 1.8 V	[1]			
		C _L = 20 pF	6.2	7.0	7.8	ns
		C _L = 40 pF	7.3	8.2	9.1	ns
		best case; T _{amb} = −30 °C; V _{CC} = 1.9 V				
		C _L = 20 pF	5.7	6.5	7.3	ns
		C _L = 40 pF	6.5	7.5	8.5	ns
		worst case; T _{amb} = +70 °C; V _{CC} = 1.62 V				
		C _L = 20 pF	6.7	7.8	8.9	ns
		C _L = 40 pF	7.5	8.8	10.1	ns
Memory card-side inputs to host-side outputs						
t _{PD}	propagation delay	nominal case; T _{amb} = +27 °C; V _{CC} = 1.8 V	[1]			
		C _L = 5 pF	4.2	6.0	7.8	ns
		C _L = 20 pF	6.3	7.2	8.1	ns
		best case; T _{amb} = −30 °C; V _{CC} = 1.9 V				
		C _L = 5 pF	4	5.9	6.9	ns
		C _L = 20 pF	5.1	6.7	8.5	ns
		worst case; T _{amb} = +70 °C; V _{CC} = 1.62 V				
		C _L = 5 pF	5.4	6.5	7.7	ns
		C _L = 20 pF	6.7	8.0	9.2	ns
Host-side pins CLK_IN to CLK_FB						
t _{PD}	propagation delay	nominal case; T _{amb} = +27 °C; V _{CC} = 1.8 V	[1]			
		C _L = 5 pF	7.6	9.2	10.7	ns
		C _L = 20 pF	8.2	9.9	11.6	ns
		best case; T _{amb} = −30 °C; V _{CC} = 1.9 V				
		C _L = 5 pF	6.7	8.1	9.5	ns
		C _L = 20 pF	7.6	8.8	10.5	ns
		worst case; T _{amb} = +70 °C; V _{CC} = 1.62 V				
		C _L = 5 pF	8.5	10.7	12.9	ns
		C _L = 20 pF	9.1	11.4	13.9	ns

[1] t_{PD} is the same as HIGH-to-LOW propagation delay (t_{PHL}) and LOW-to-HIGH propagation delay (t_{PLH}).

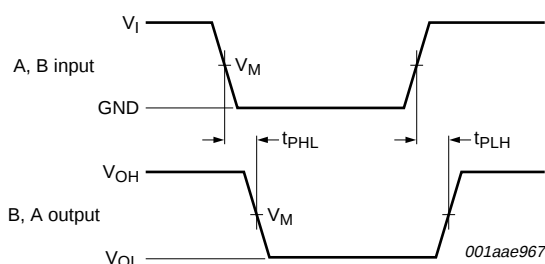

Measuring points: host-side at $0.5V_{CC}$ and memory card-side at $0.5V_{O(reg)}$.
 V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Fig 4. Output rise and fall times and data input to output propagation delay times (host-side to card-side or card-side to host-side)


Table 12. Power dissipation per channel

$V_{CC} = 1.8\text{ V}$; $V_{BAT} = 4\text{ V}$; all values are typical; memory card-side $C_L = 20\text{ pF}$ and host-side $C_L = 5\text{ pF}$.

Frequency (MHz)	I_{BAT} (mA)	I_{CC} (mA)	P (mW) ^[1]
Host-side input to memory card-side output			
Data channel			
1.0	0.79	0.002	3.16
10.0	3.30	0.020	13.3
20.0	5.79	0.037	23.2
50.0	12.3	0.090	49.4
Clock channel			
1.0	0.44	0.05	1.85
10.0	3.1	0.59	13.5
20.0	5.4	0.97	23.4
50.0	12.2	2.36	53.1
Memory card-side input to host-side output			
Data channel			
1.0	0.18	0.1	0.9
10.0	0.42	0.96	3.41
20.0	0.66	1.91	6.1
50.0	1.4	4.5	13.7

[1] Power consumption is largely dependent on capacitive load connected to a driver output:
 $P = V_{CC} \times I_{CC} + V_{BAT} \times I_{BAT}$.

10. Test information

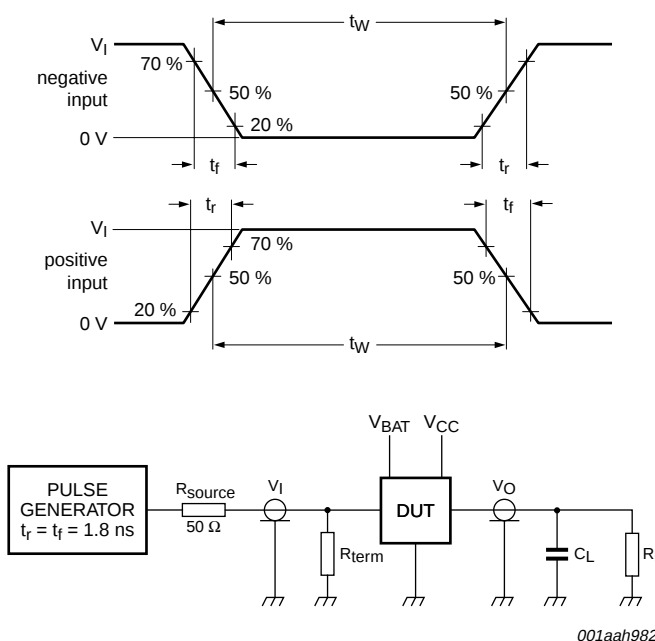

Definitions test circuit:

R_{source} = source resistance of pulse generator.

R_{term} = termination resistance should be equal to output impedance Z_0 of the pulse generator.

C_L = load capacitance including jig and probe capacitance.

R_L = load resistance.

Fig 5. Load circuitry for measuring switching time

11. Marking

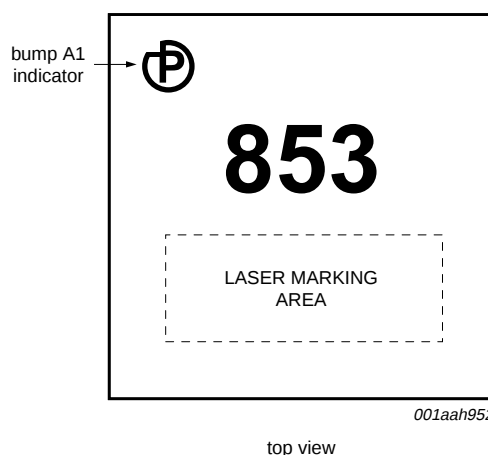


Fig 6. Marking of IP4853CX24

12. Package outline

WLCSP24: wafer level chip-size package; 24 bumps; 2.01 x 2.01 x 0.61 mm

IP4853CX24

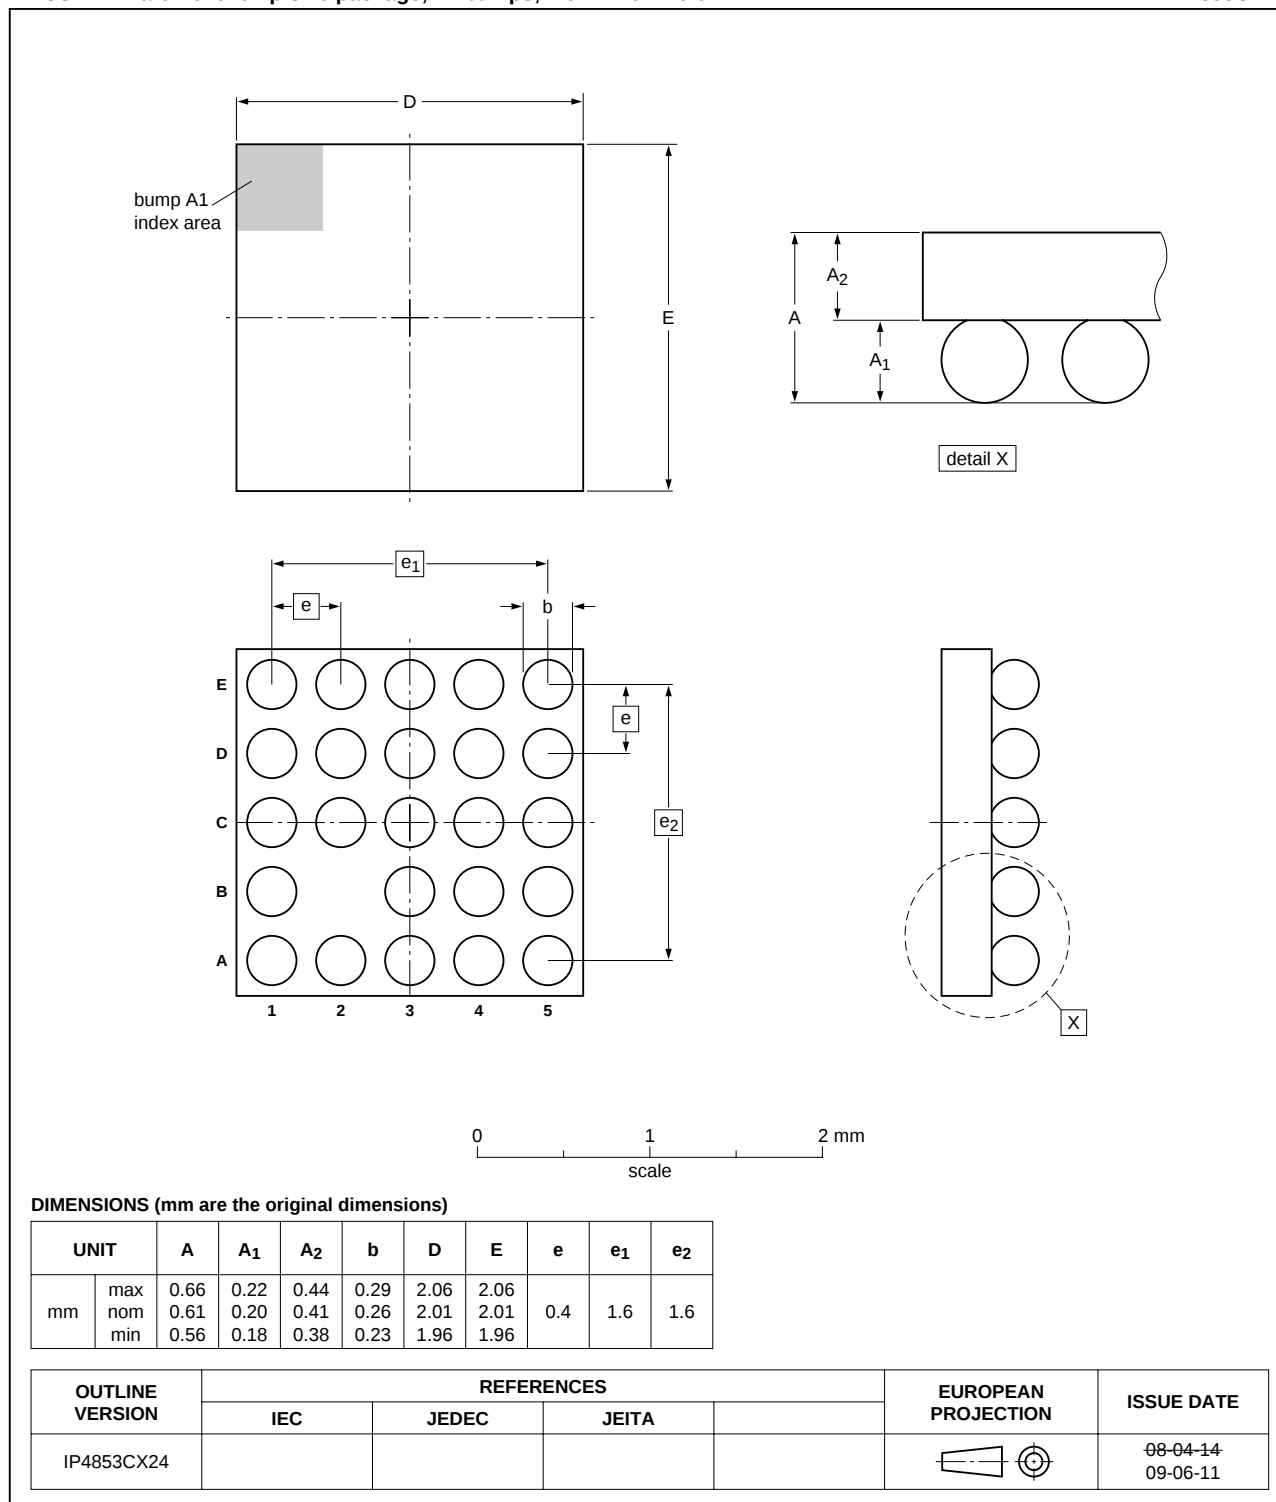


Fig 7. Package outline IP4853CX24 (WLCSP24)

13. Packing information

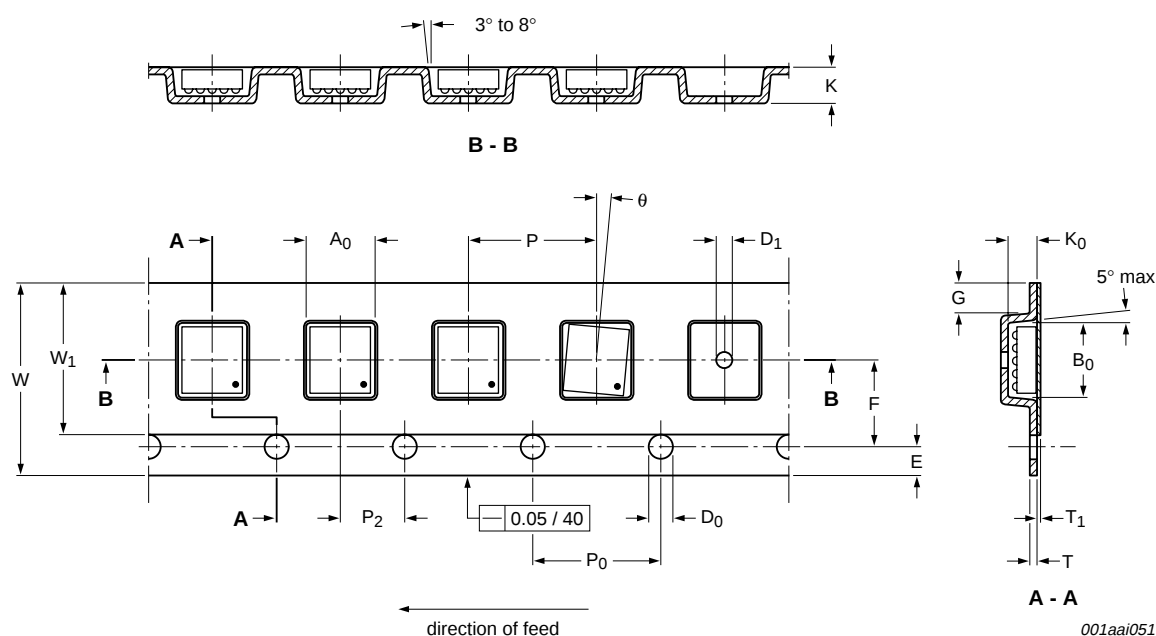


Fig 8. Tape and reel information

Table 13. Tape dimensions

Description	Item	Symbol	Specification (mm)	
			Dimension	Tolerance
Overall dimensions	tape width	W	8.00	±0.1
	thickness	K	1.20	max.
	distance	G	0.75	min.
Sprocket holes ^[1]	diameter	D ₀	1.50	+0.1
	distance	E	1.75	±0.1
	pitch	P ₀	4.00	±0.1
Distance between center lines	length direction	P ₂	2.00	±0.05
	width direction	F	3.50	±0.05
Compartments	length	A ₀	2.20	±0.05
	width	B ₀	2.20	±0.05
	depth	K ₀	0.80	±0.05
	hole diameter	D ₁	0.50	+0.1
	pitch	P	4.00	±0.1
Device	rotation	θ	20°	max.
Carrier tape antistatic ^[2]	film thickness	T	0.25	±0.07
Cover tape ^[3]	width	W ₁	5.75	max.
	film thickness	T ₁	0.1	max.
Bending radius	in winding direction	R	30	min.

- [1] Cumulated pitch error: ± 0.2 mm per 10 pitches.
- [2] Carbon loaded polystyrene 100 % recyclable.
- [3] The cover tape shall not overlap the sprocket holes.

14. Design and assembly recommendations

14.1 PCB design guidelines

To achieve optimum performance it is recommended to use a Non-Solder Mask Design (NSMD) PCB design, also known as a copper defined design, incorporating laser-drilled micro-vias connecting the ground pads to a buried ground-plane layer. This results in the lowest possible ground inductance and provides the best high frequency and ESD performance. Refer to [Table 14](#) for the recommended PCB design parameters.

Table 14. Recommended PCB design parameters


PCB pad size	225 μm diameter
Micro-via diameter	100 μm
Solder mask opening	335 μm diameter
Copper thickness	20 μm to 40 μm
Copper finish	OSP
PCB material	FR4

14.2 PCB assembly guidelines for Pb-free soldering

Table 15. Assemble recommendations

Solder screen aperture size	255 μm diameter
Solder screen thickness	100 μm (0.004")
Solder paste: Pb-free	SnAg ^[1] Cu ^[2]
Solder/flux ratio	50 : 50
Solder reflow profile	see Figure 9

- [1] 3 to 4.
- [2] 0.5 to 0.9.

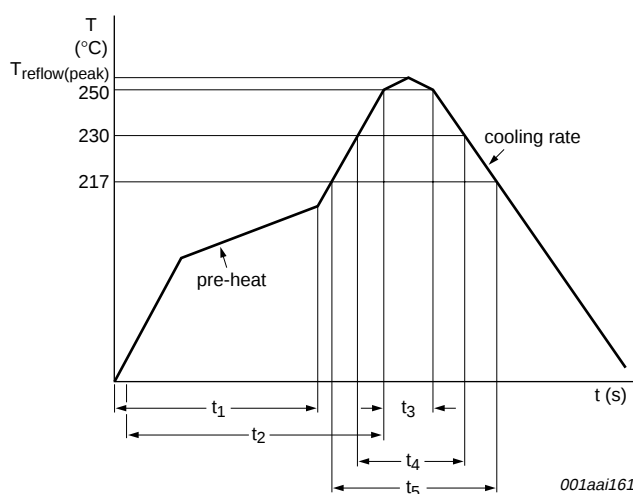

The device is capable of withstanding at least three reflows of this profile.

Fig 9. Pb-free solder reflow profile

Table 16. Characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$T_{\text{reflow(peak)}}$	peak reflow temperature	$\Delta T = 0^{\circ}\text{C}$ to $+5^{\circ}\text{C}$	230	-	255	$^{\circ}\text{C}$
t_1	time 1	soak time	60	-	180	s
t_2	time 2	time from $T = 25^{\circ}\text{C}$ to $T_{\text{reflow(peak)}}$	240	-	300	s
t_3	time 3	time during $T \geq 250^{\circ}\text{C}$	-	-	30	s
t_4	time 4	time during $T \geq 230^{\circ}\text{C}$	10	-	50	s
t_5	time 5	time during $T > 217^{\circ}\text{C}$	30	-	150	s
dT/dt	rate of change of temperature	cooling rate	-	-	-6	$^{\circ}\text{C/s}$
		pre-heat	2.5	-	4.0	$^{\circ}\text{C/s}$

15. Abbreviations

Table 17. Abbreviations

Acronym	Description
DUT	Device Under Test
EMI	ElectroMagnetic Interference
ESD	ElectroStatic Discharge
FR4	Flame Retard 4
MMC	MultiMediaCard
NSMD	Non-Solder Mask Design
OSP	Organic Solderability Preservation
PCB	Printed-Circuit Board
PSU	Power Supply Unit

Table 17. Abbreviations ...continued

Acronym	Description
RoHS	Restriction of Hazardous Substances
SD	Secure Digital
WLCSP	Wafer Level Chip-Scale Package

16. Revision history

Table 18. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
IP4853CX24_2	20090615	Product data sheet	-	IP4853CX24_1
Modifications:	• Table 11: Added minimum values and values for 'host-side pins CLK_IN to CLK_FB'. • Table 7: Changed maximum value for regulator quiescent current (not active mode). • Table 8: Moved values from maximum to minimum for power supply rejection ratio. • Removed /LF from all instances of type number IP4853CX24.			
IP4853CX24_1	20080722	Product data sheet	-	-

17. Legal information

17.1 Data sheet status

Document status ^{[1][2]}	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

17.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

17.3 Disclaimers

General — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental

damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

17.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

18. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

19. Contents

1	Product profile	1
1.1	General description	1
1.2	Features	1
1.3	Applications	1
2	Pinning information	2
2.1	Pinning	2
2.2	Pin description	2
3	Ordering information	3
4	Block diagram	4
5	Functional description	5
5.1	Logic control signals	5
6	Limiting values	6
7	Recommended operating conditions	6
8	Static characteristics	7
9	Dynamic characteristics	8
10	Test information	12
11	Marking	12
12	Package outline	13
13	Packing information	14
14	Design and assembly recommendations	15
14.1	PCB design guidelines	15
14.2	PCB assembly guidelines for Pb-free soldering	15
15	Abbreviations	16
16	Revision history	17
17	Legal information	18
17.1	Data sheet status	18
17.2	Definitions	18
17.3	Disclaimers	18
17.4	Trademarks	18
18	Contact information	18
19	Contents	19

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

founded by

PHILIPS

© NXP B.V. 2009.

All rights reserved.

For more information, please visit: <http://www.nxp.com>For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 15 June 2009

Document identifier: IP4853CX24_2