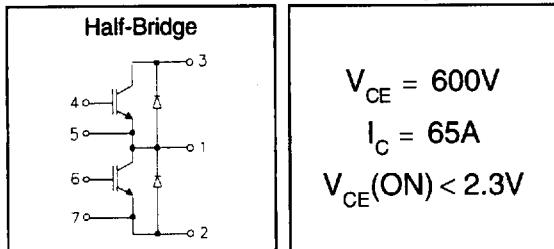
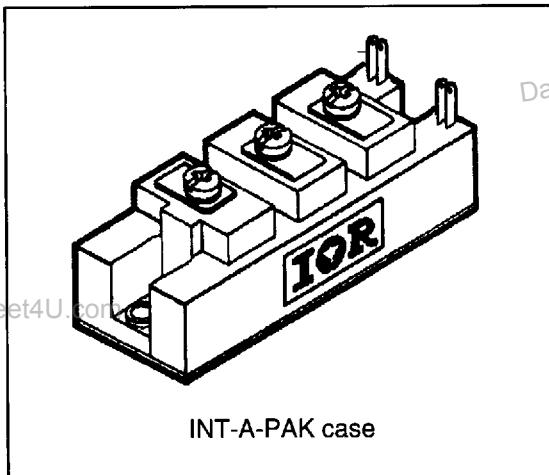


"HALF-BRIDGE" IGBT INT-A-PAK**Fast Speed IGBT**

- Rugged Design
- Simple gate-drive
- Fast operation up to 10KHz hard switching, or 50Khz resonant
- Switching-Loss Rating includes all "tail" losses

**Description**

IR's advanced IGBT technology is the key to this line of INT-A-pak Power Modules. The efficient geometry and unique processing of the IGBT allow higher current densities than comparable bipolar power module transistors, while at the same time requiring the simpler gate-drive of the familiar power MOSFET. This superior technology has now been coupled to state of the art assembly techniques to produce a higher current module that is highly suited to power applications such as motor drives, uninterruptible power supplies, welding, induction heating and ultrasonics.

**Absolute Maximum Ratings**

Parameter	Description	Value	Units
V_{CES}	Continuous collector to emitter voltage	600	V
$I_C @ T_C = 25^\circ C$	Continuous collector current	65	
$I_C @ T_C = 85^\circ C$	Continuous collector current	40	
$I_C @ T_C = 100^\circ C$	Continuous collector current	35	A
I_{LM}	Peak switching current	130	
I_{FM}	Peak diode forward current (1)	165	
V_{GE}	Gate to emitter voltage	± 20	V
V_{ISOL}	RMS isolation voltage, any terminal to case, $t = 1 \text{ min}$	2500	
$P_D @ T_C = 25^\circ C$	Power dissipation	179	W
T_J	Operating junction temperature range	-40 to 150	$^\circ C$
T_{STG}	Storage temperature range	-40 to 125	

IRGTI065F06



Electrical Characteristics - $T_J = 25^\circ\text{C}$, unless otherwise stated

Parameter	Description	Min	Typ	Max	Units	Test Conditions
BV_{CES}	Collector-to-emitter breakdown voltage	600	—	—	V	$V_{\text{GE}} = 0\text{V}, I_C = 500\mu\text{A}$
$V_{\text{CE}}(\text{ON})$	Collector-to-emitter voltage	—	—	2.3		$V_{\text{GE}} = 15\text{V}, I_C = 65\text{A}$
		—	2.6	—		$V_{\text{GE}} = 15\text{V}, I_C = 65\text{A}, T_J = 150^\circ\text{C}$
V_{FM}	Diode forward voltage - maximum	—	—	3.2		$I_F = 65\text{A}, V_{\text{GE}} = 0\text{V}$
		—	3.2	—		$I_F = 65\text{A}, V_{\text{GE}} = 0\text{V}, T_J = 150^\circ\text{C}$
V_{GEth}	Gate threshold voltage	3.0	—	5.5	—	$I_C = 250\mu\text{A}$
ΔV_{GEth}	Threshold voltage temp. coeff.	—	-11	—	mV/°C	$V_{\text{CE}} = V_{\text{GE}}, I_C = 250\mu\text{A}$
g_{fe}	Forward transconductance	26	—	36	S(Ω)	$V_{\text{CE}} = 25\text{V}, I_C = 65\text{A}$
I_{CES}	Collector-to-emitter leakage current	—	—	500	μA	$V_{\text{GE}} = 0\text{V}, V_{\text{CE}} = 600\text{V}$
		—	—	5	mA	$V_{\text{GE}} = 0\text{V}, V_{\text{CE}} = 600\text{V}, T_J = 150^\circ\text{C}$
I_{GES}	Gate-to-emitter leakage current	—	—	±500	nA	$V_{\text{GE}} = \pm 20\text{V}$

Dynamic Characteristics - $T_J = 150^\circ\text{C}$

Parameter	Description	Min	Typ	Max	Units	Test Conditions
E_{on}	Turn-on switching energy	—	0.05	—	mJ/A	$R_{G1} = 82\Omega, R_{G2} = 0\Omega$
$E_{\text{off}} \text{ (1)}$		—	0.17	—		$I_C = 65\text{A}, L_S = 100\text{nH}$
$E_{\text{ts}} \text{ (1)}$		—	—	0.3		$V_{CC} = 360\text{V}, V_{\text{GE}} = \pm 15\text{V}$
$t_{d(on)}$	Turn-on delay time	—	80	—	ns	$R_{G1} = 82\Omega, R_{G2} = 0\Omega$
	Rise time	—	150	—		$I_C = 65\text{A}$
	Turn-off delay time	—	450	—		$V_{CC} = 360\text{V}, V_{\text{GE}} = \pm 15\text{V}$
	Fall time	—	900	—		$L_S = 100\text{nH}$
I_{rr}	Diode peak recovery current	—	30	—	A	$R_{G1} = 82\Omega, R_{G2} = 0\Omega$
	Diode recovery time	—	115	—	ns	$I_C = 65\text{A}$
	Diode recovery charge	—	2.0	—	μC	$V_{CC} = 360\text{V}, V_{\text{GE}} = \pm 15\text{V}$
Q_{ge}	Gate-to-emitter charge (turn-on)	77	—	140	nC	$V_{CC} = 360\text{V}$
	Gate-to-collector charge (turn-on)	35	—	70		$I_C = 65\text{A}$
	Total gate charge (turn-on)	13	—	21		$V_{\text{GE}} = 15\text{V}$
C_{ies}	Input capacitance	—	2900	—	pF	$V_{\text{GE}} = 0\text{V}$
	Output capacitance	—	330	—		$V_{CC} = 30\text{V}$
	Reverse transfer capacitance	—	40	—		$f = 1\text{MHz}$

(1) Includes tail losses

Thermal and Mechanical Characteristics

Parameter	Description	Typ	Max	Units
$R_{\text{thJC}} \text{ (IGBT)}$	Thermal resistance, junction to case, each IGBT	—	0.7	°C/W
$R_{\text{thJC}} \text{ (Diode)}$	Thermal resistance, junction to case, each diode	—	1.3	
$R_{\text{thCS}} \text{ (Module)}$	Thermal resistance, case to sink	0.1	—	
Wt	Weight of module	140	—	g

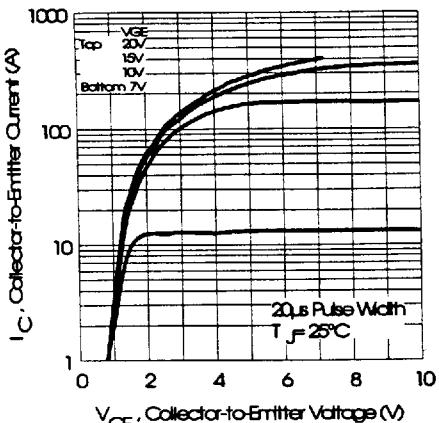


Fig. 1 - Typical Output Characteristics, $T_J = 25^\circ\text{C}$

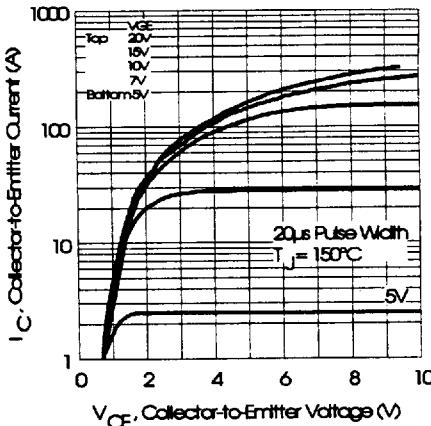


Fig. 2 - Typical Output Characteristics, $T_J = 150^\circ\text{C}$

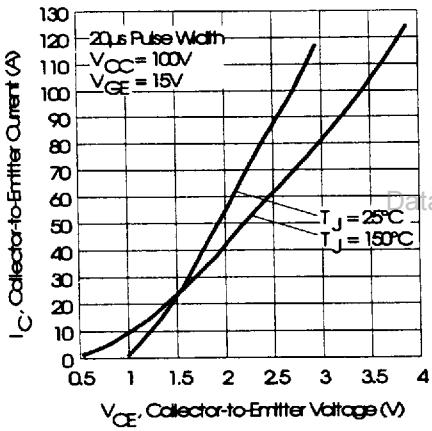


Fig. 3 - Typical Output Characteristics

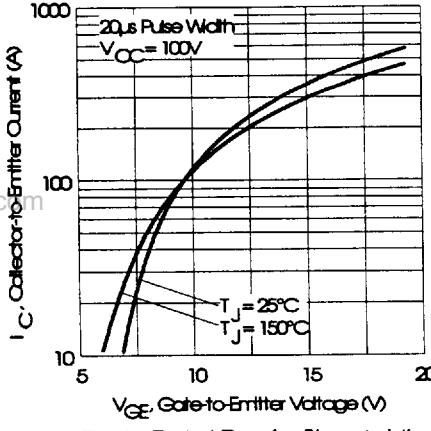


Fig. 4 - Typical Transfer Characteristics

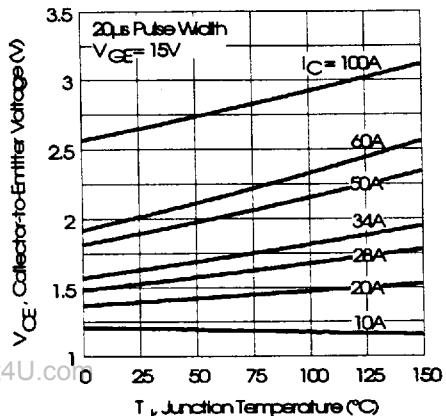


Fig. 5 - Collector-to-Emitter Saturation
Typical Voltage vs. Junction Temperature

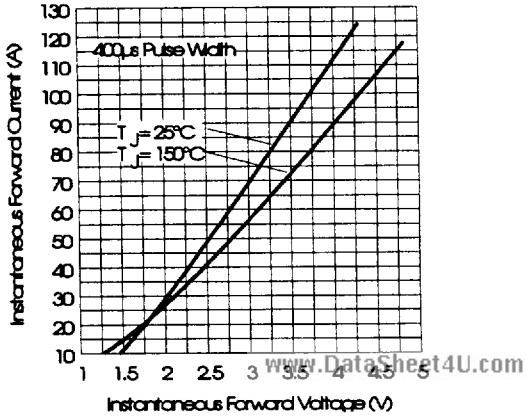


Fig. 6 - Forward Voltage Drop Characteristics

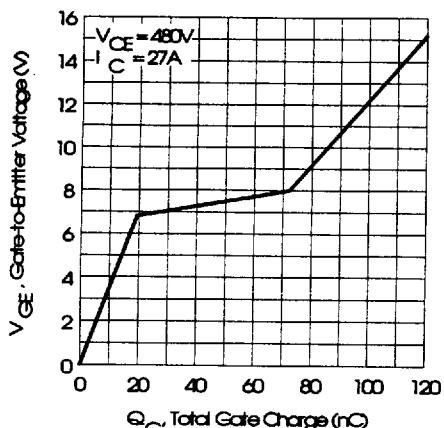
IRGTI065F06**TO-220**

Fig. 7 - Typical Gate Charge vs. Gate-to-Emitter Voltage

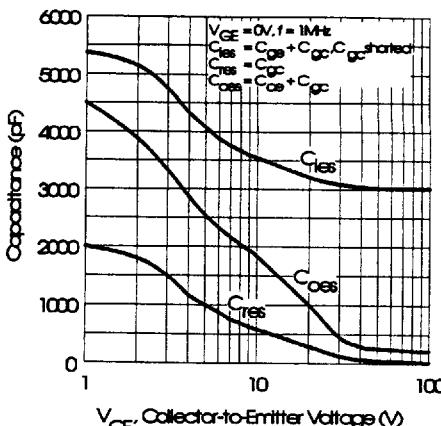


Fig. 8 - Typical Capacitance vs. Collector-to-Emitter Voltage

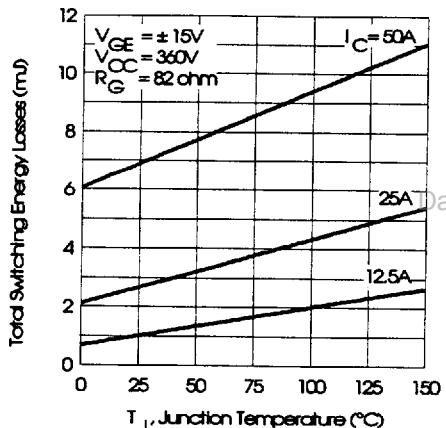


Fig. 9 - Typical Switching Losses vs. Junction Temperature

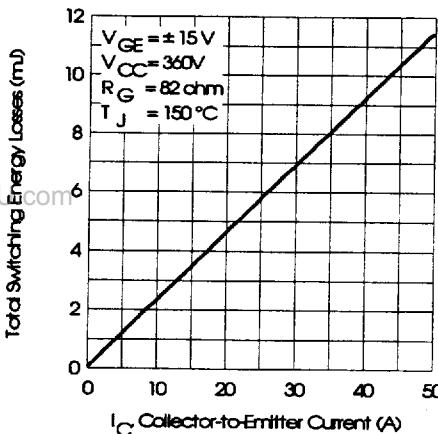


Fig. 10 - Typical Switching Losses vs. Collector-to-Emitter Current

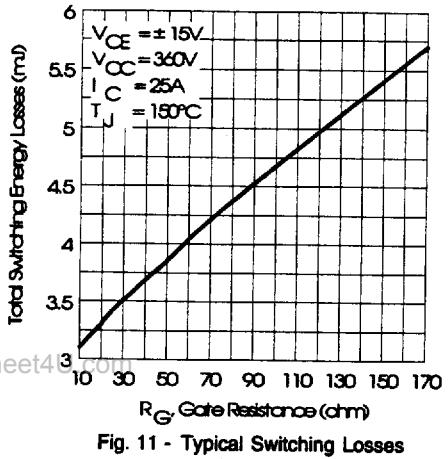


Fig. 11 - Typical Switching Losses vs. Gate Resistance

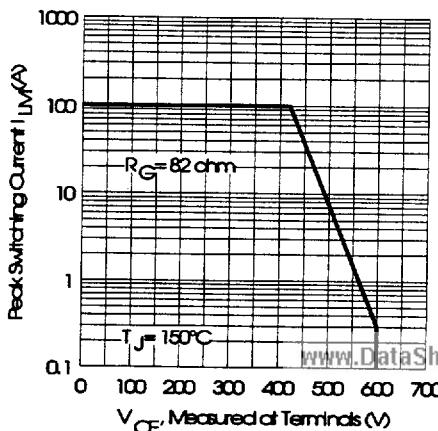


Fig. 12 - Reverse Bias Safe Operating Area

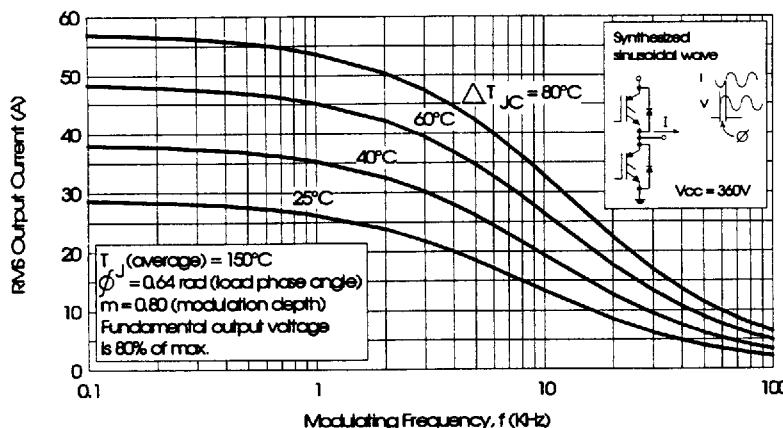


Fig. 13 - Typical RMS Output Current per phase vs. Frequency (Synthesized Sinusoidal Wave)

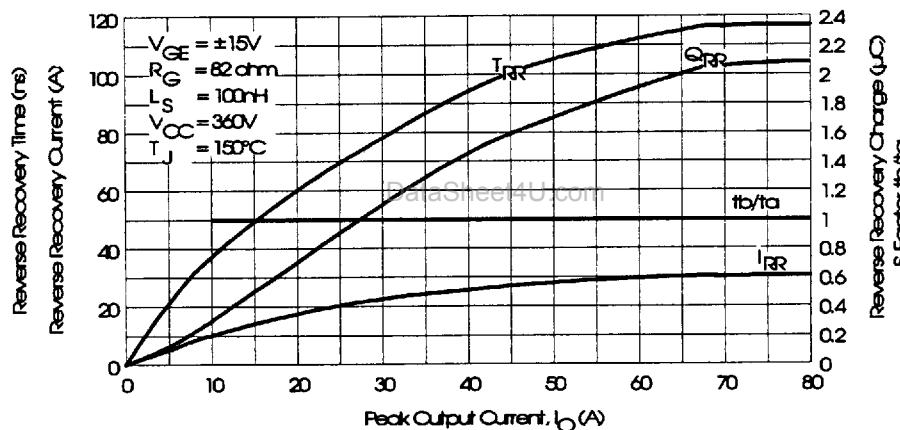
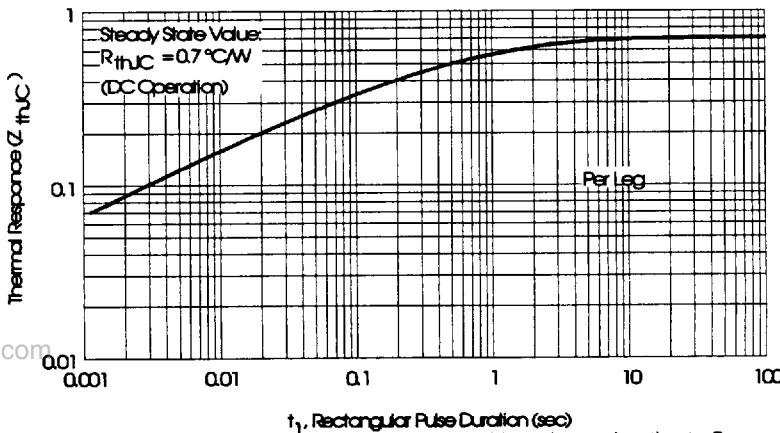
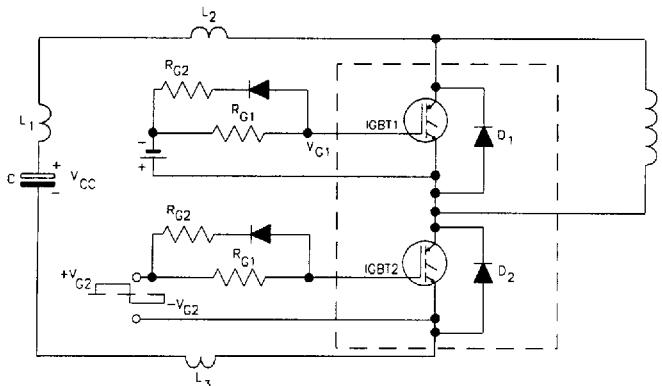
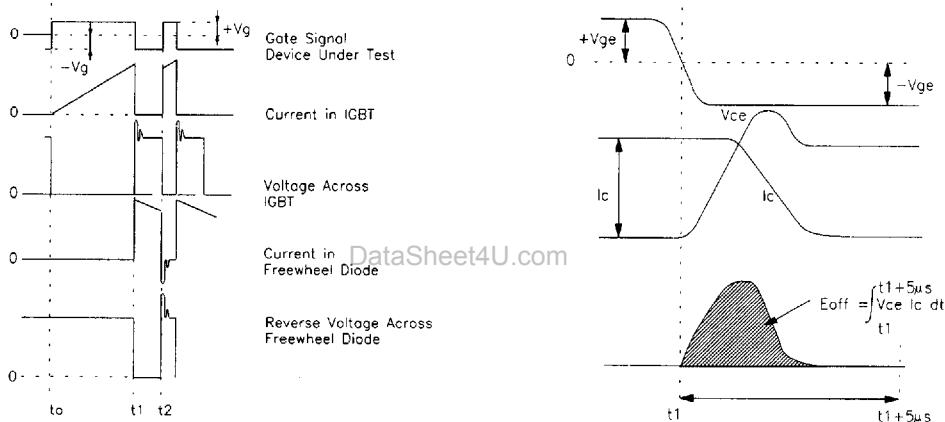
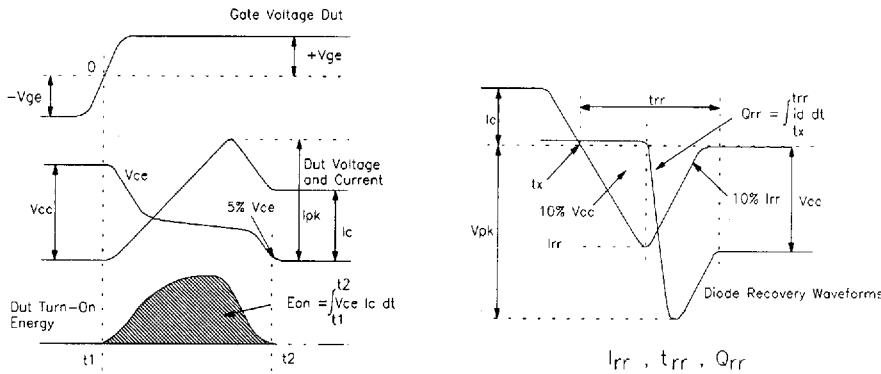
Fig. 14 - Typical Diode Recovery Characteristics as Function of Output Current I_O 

Fig. 15 - Maximum Effective Transient Thermal Impedance, Junction-to-Case

IRGTI065F06**Fig. 16 - Test Circuit for Measurement of I_{LM} , E_{ON} , E_{OFF} , Q_{RR} , I_{RR} , $t_{D(ON)}$, t_r , $t_{D(OFF)}$, t_i** **Fig. 17 - Test Waveforms for Circuit of Fig. 16****Fig. 18 - Test Waveforms for Circuit of Fig. 16, Defining E_{ON} , E_{REC} , $t_{D(ON)}$, t_r , I_{RR} , t_{RR} , Q_{RR}**

DataSheet4U.com

Refer to Section D for the following:**Appendix E: Section D - page D-7**

www.DataSheet4U.com

Fig. 19 - Waveforms for Switching Time**Package Outline 10 - INT-A-PAK Half Bridge Section D - page D-16**