



JEER3006SCT

EPI SUPERFAST SOFT RECOVERY RECTIFIER


Rev.1.4

DESCRIPTION

- ✧ Plastic package has underwriters laboratory flammability classification 94V-0
- ✧ Lead free in comply with EU RoHS 2011/65/EU directives
- ✧ Low reverse leakage current
- ✧ Superfast recovery time and soft recovery characteristics
- ✧ Low recovery loss
- ✧ Applications for Interleaved PFC topology in switched-mode power supplies, active PFC in air conditioner

MECHANICAL DATA

- ✧ Case: TO-247J molded plastic over passivated junction
- ✧ Terminals: Solder plated, solderable per J-STD-002
- ✧ Weight: 6 gram

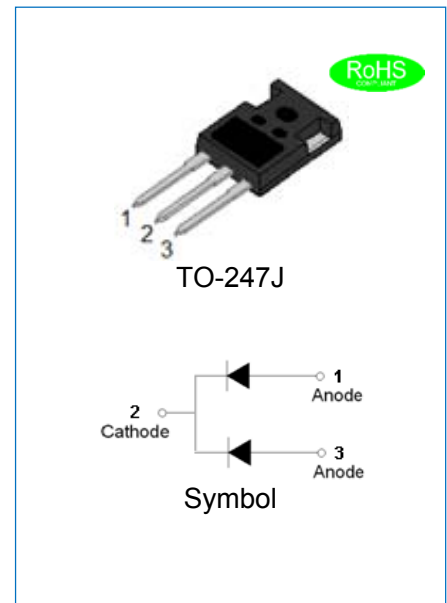

ABSOLUTE MAXIMUM RATING (Rating at 25°C case temperature unless otherwise specified.)

Parameter	Symbol	JEER3006SCT	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	600	V
Maximum RMS voltage	V_{RMS}	420	V
Maximum DC blocking voltage	V_{DC}	600	V
Maximum average forward current $\delta=0.5, T_{mb} \leq 127^{\circ}\text{C}$, square-wave pulse	$I_{F(AV)}$	30	A
Peak forward surge current: 10ms single half sine-wave superimposed on rated load (per diode)	I_{FSM}	155	A
Junction temperature and storage temperature range	T_j, T_{stg}	-55 to +175	$^{\circ}\text{C}$


ELECTRICAL CHARACTERISTICS(Rating at 25°C case temperature unless otherwise specified.)

Parameter		Symbol	Min.	Typ.	Max.	Unit
Forward voltage @ $I_F=15A$	$T_J=25^{\circ}C$	V_F	-	1.4	1.7	V
	$T_J=150^{\circ}C$		-	1.1	1.4	
Reverse current at rated DC blocking voltage	$T_J=25^{\circ}C$	I_R	-	-	5	μA
	$T_J=150^{\circ}C$		-	-	300	
Reverse recovery time	$I_F=1A, V_R=30V,$ $di/dt=100A/\mu s, T_J=25^{\circ}C$	t_{rr}	-	25	50	ns
	$I_F=15A, V_R=400V,$ $di/dt=200A/\mu s, T_J=25^{\circ}C$		-	45	-	
	$I_F=15A, V_R=400V,$ $di/dt=200A/\mu s, T_J=125^{\circ}C$		-	65	-	
	$I_F=15A, V_R=400V,$ $di/dt=500A/\mu s, T_J=25^{\circ}C$		-	34	-	
Peak reverse recovery current	$I_F=15A, V_R=400V,$ $di/dt=200A/\mu s, T_J=25^{\circ}C$	I_{RM}	-	5.5	-	A
	$I_F=15A, V_R=400V,$ $di/dt=200A/\mu s, T_J=125^{\circ}C$		-	9.7	-	
Recovered charge	$I_F=15A, V_R=400V,$ $di/dt=200A/\mu s, T_J=25^{\circ}C$	Q_r	-	125	-	nC
	$I_F=15A, V_R=400V,$ $di/dt=200A/\mu s, T_J=125^{\circ}C$		-	318	-	

THERMAL RESISTANCES

Symbol	Parameter	Min.	Typ.	Max.	Unit
$R_{th(j-mb)}$	Thermal resistance from junction to mounting base, per diode	-	1.2	2	$^{\circ}C/W$
	Thermal resistance from junction to mounting base, both diodes conducting	-	0.65	1.2	
$R_{th(j-a)}$	Thermal resistance from junction to ambient	-	45	-	$^{\circ}C/W$

MARKING

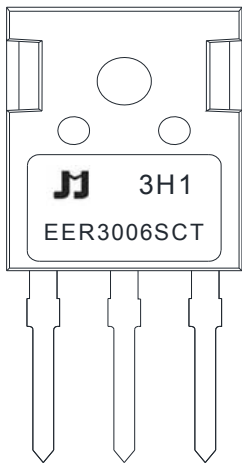

EER	EPI Super Fast Recovery Rectifier
30	$I_{F(AV)}=30A$
06	$V_{RRM}:600V$
S	Package:TO-247J
CT	Common cathode

xH1: Month, 1、2、3 ~ 9、A、B、C

3x1:


2018	2019	2020	2021	2022	2023	2024
H	I	J	K	L	M	N
2025	2026	2027	2028	2029	2030	...
O	P	Q	R	S	T	...

3Hx: Batch number

ORDERING INFORMATION

<u>J</u>	<u>E</u>	<u>E</u>	<u>R</u>	<u>30</u>	<u>06</u>	<u>S</u>	<u>CT</u>
JIEJIE Microelectronics	Epi	Superfast	Rectifier	$I_{F(AV)}=30A$	$V_{RRM}:600V$	Package:TO-247J	Common cathode

PACKAGE MECHANICAL DATA

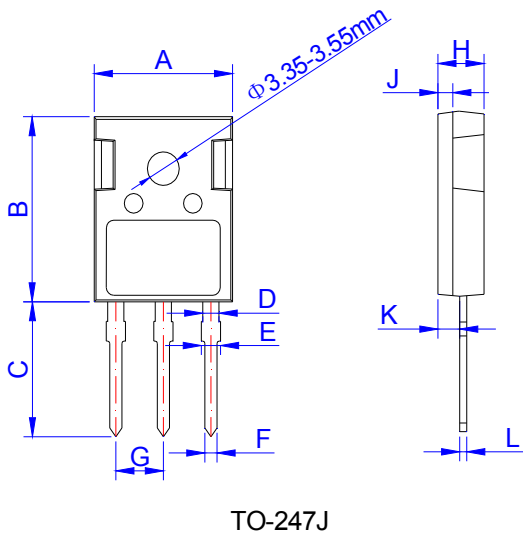

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	15.50	15.80	16.10	0.610	0.622	0.634
B	20.80	21.00	21.20	0.819	0.827	0.835
C	19.70	20.00	20.30	0.776	0.787	0.799
D	1.80	2.00	2.20	0.071	0.079	0.087
E	1.90	2.10	2.30	0.075	0.083	0.091
F	1.00	1.20	1.40	0.039	0.047	0.055
G		5.44			0.214	
H	4.80	5.00	5.20	0.189	0.197	0.205
J	1.90	2.00	2.10	0.075	0.079	0.083
K	2.20	2.35	2.50	0.087	0.093	0.098
L	0.41	0.60	0.79	0.016	0.024	0.031

PACKAGE INFORMATION-TO-247J

OUTLINE	UNIT WEIGHT (g/PCS) typ.	TUBE (PCS)	PER CARTON (PCS)
TUBE	6	30	2,250

CHARACTERISTICS CURVE

FIG.1: Typical forward characteristics

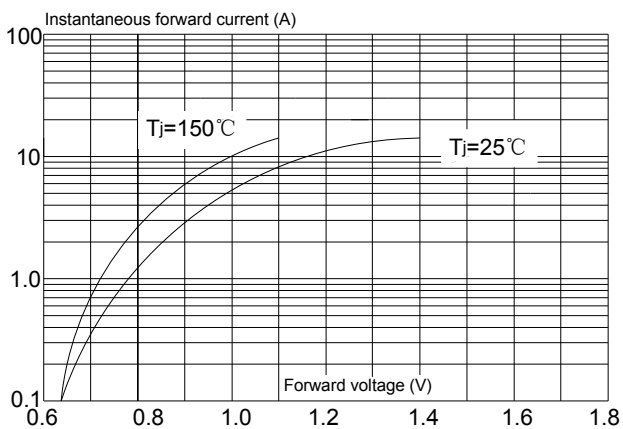


FIG.2: Typical reverse characteristics

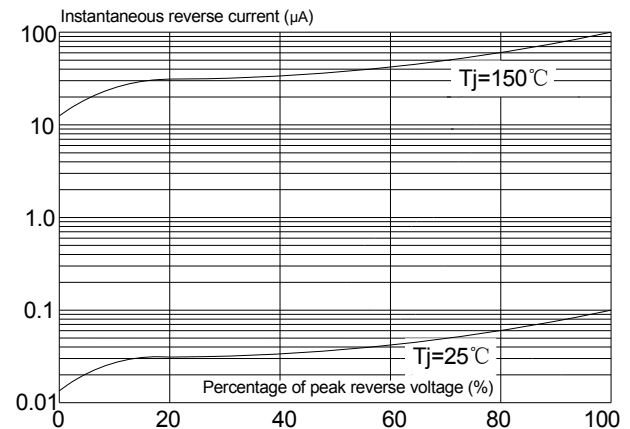


FIG.3: Maximum non-repetitive peak forward surge current(10ms single half sine-wave)

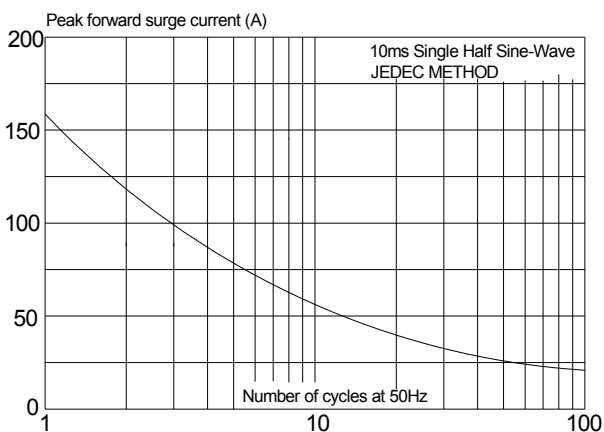


FIG.4: Forward current derating curve

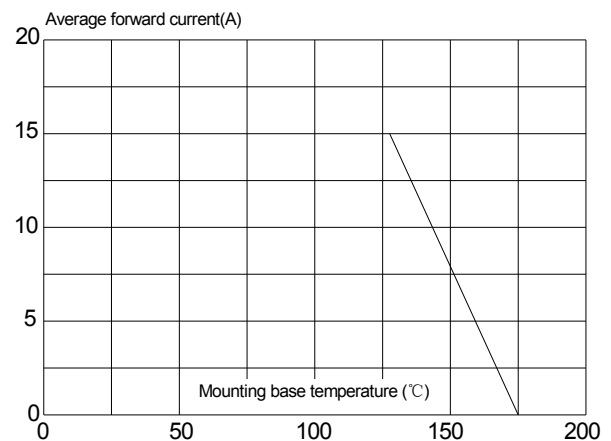


FIG.5: Forward power dissipation vs. average forward current (square waveform)


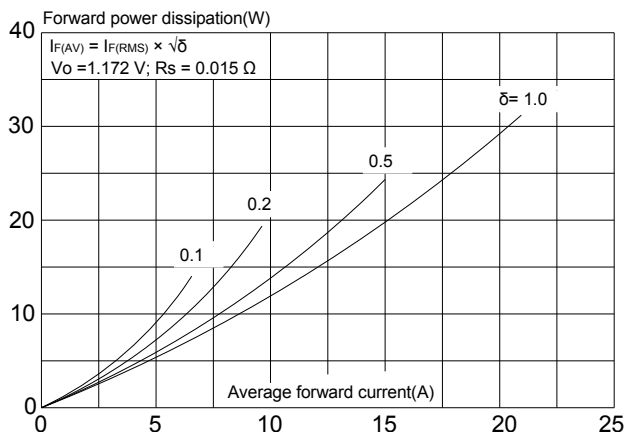


FIG.6: Forward power dissipation vs. average forward current (sinusoidal waveform)

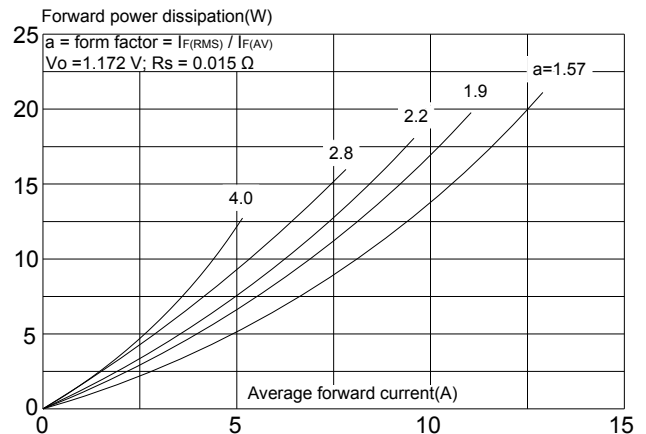

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the 1.4th version which is made in 27-July-2021. This document supersedes and replaces all information previously supplied.



is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright ©2021 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserve.