


SIGNAL LEVEL SENSOR SYSTEM

■ GENERAL DESCRIPTION

The NJM2072 is a monolithic integrated circuit designed for signal level sensor system. The NJM2072 features low power, low voltage operation, and high input sensitivity and is suited for the signal level sensor system for micro cassette, vox for telecommunications.

■ PACKAGE OUTLINE



NJM2072D




NJM2072M

■ FEATURES

- Operating Voltage +0.9 to +7V
- Low Operating Current 0.55mA typ.
- High Input Sensitivity -36dBV typ.
- Package Outline DIP8, DMP8
- Bipolar Technology

■ PIN CONFIGURATION




NJM2072D
NJM2072M

PIN FUNCTION

1. INPUT
2. Gain Control
3. Amp. Output
4. GND
5. Capacitor for Recovery time
6. OUT1
7. OUT2
8. V^+

■ BLOCK DIAGRAM

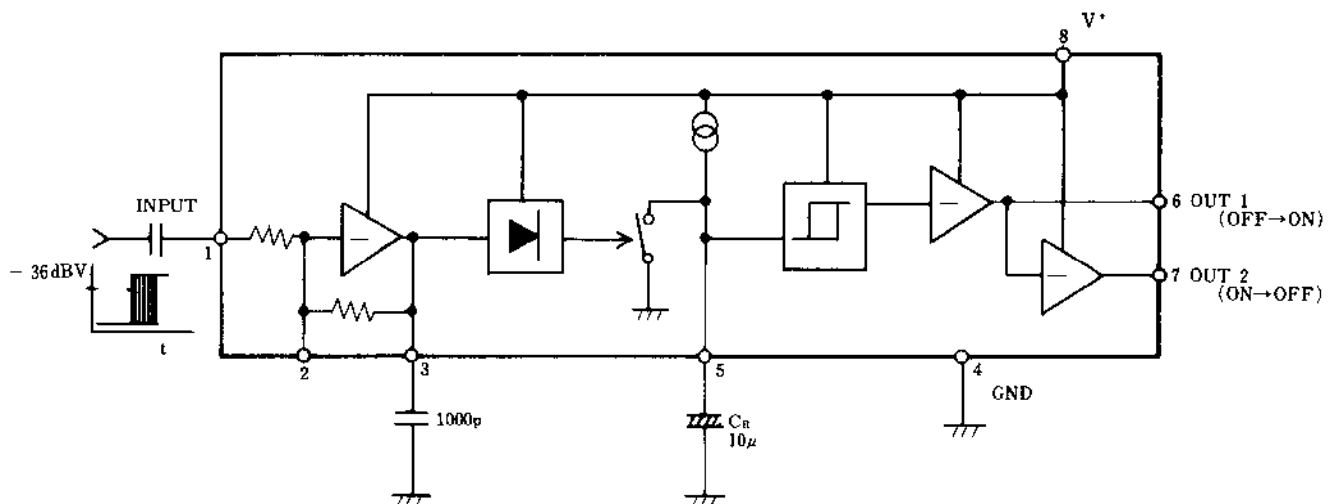

NJM2072

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	8	V
Power Dissipation	P_D	(DIP8) 500 (DMP8) 300	mW
Operating Temperature Range	T_{opr}	-40~+85	°C
Storage Temperature Range	T_{stg}	-40~+125	°C
Maximum Input Voltage	V_{imax}	V^+-1	V

■ ELECTRICAL CHARACTERISTICS

(Ta=25°C, $V^+=3V$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V^+		0.9	-	7	V
Operating Current	I_{CC}	$V_{in}=0mV_{rms}, R_L=\infty$	0.2	0.55	1.5	mA
Input Sensitivity	V_{ins}	$f=1kHz$	-39	-36	-33	dBV
Attack Time (note1)	T_{atc}	$f=1kHz, C_R=10\mu F$	-	1	25	mSec
Recovery Time (note2)	T_{rec}	$f=1kHz, C_R=10\mu F$	-	2	-	Sec
Output Current at ON (OUT1)	$I_{O1 on}$	$V_{in}=30mV_{rms}, V_O=0.3V$	1	3	-	mA
Output Current at ON (OUT2)	$I_{O2 on}$	$V_{in}=0mV_{rms}, V_O=0.3V$	1	3	-	mA
Output Current at OFF (OUT1)	$I_{O1 off}$	$V_{in}=0mV_{rms}, V_O=8V$	-	-	1	μA
Output Current at OFF (OUT2)	$I_{O2 off}$	$V_{in}=30mV_{rms}, V_O=8V$	-	-	1	μA
Input Resistance	R_{in}		16	20	24	k Ω
Charge Current	I_{chg}		1.0	2.0	3.0	μA


(note1) Attack Time: Period from putting input signal of more than minimum input sensitive signal to output level change.

(note2) Recovery Time: Period from input signal becoming lower than minimum input sensitive signal to output level change.

■ TYPICAL CHARACTERISTICS


**Operating Current
vs. Operating Voltage**

($T_a = 25^\circ\text{C}$)

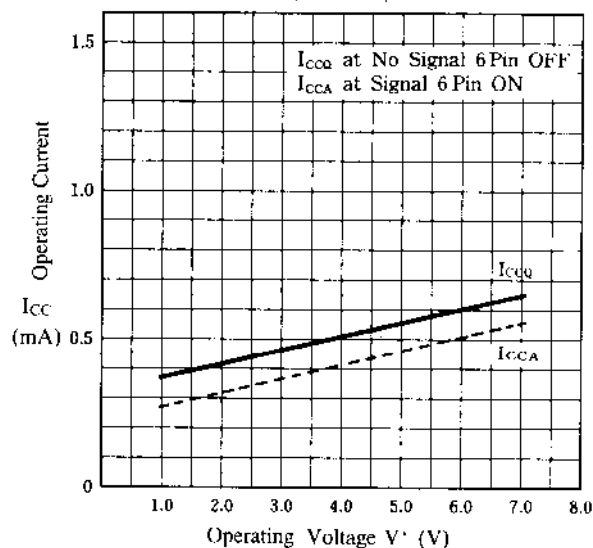


**Input Sensitivity
vs. Operating Voltage**

($T_a = 25^\circ\text{C}$, $f = 1\text{kHz}$)

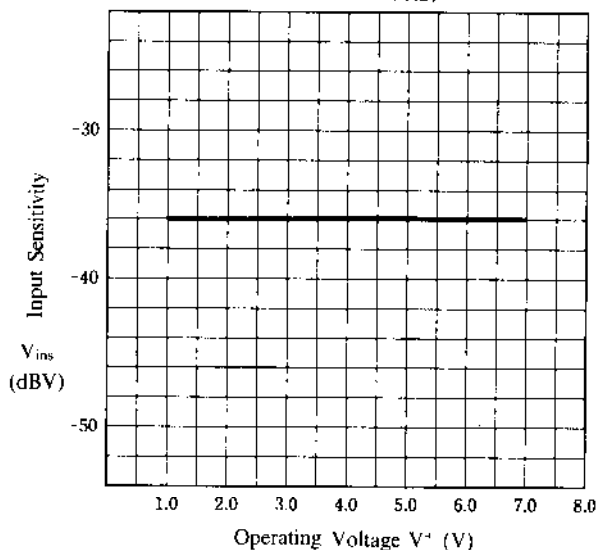


**Output Voltage
vs. Input Voltage**

($V^+ = 3\text{V}$, $f = 1\text{kHz}$, 6 Pin, $T_a = 25^\circ\text{C}$)

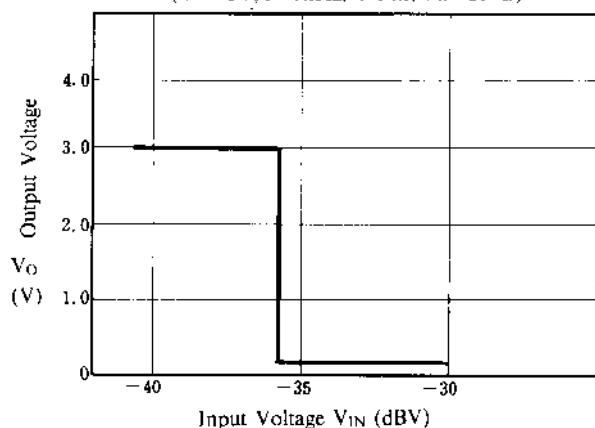


**Output Current at ON
vs. Output Voltage**

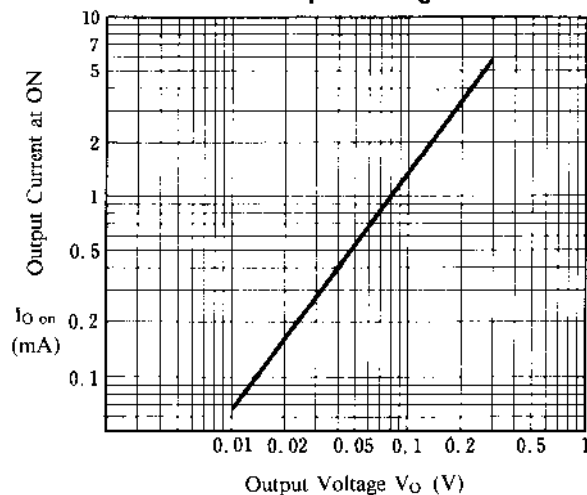


**Input Sensitivity
vs. Frequency**

($V^+ = 3\text{V}$)

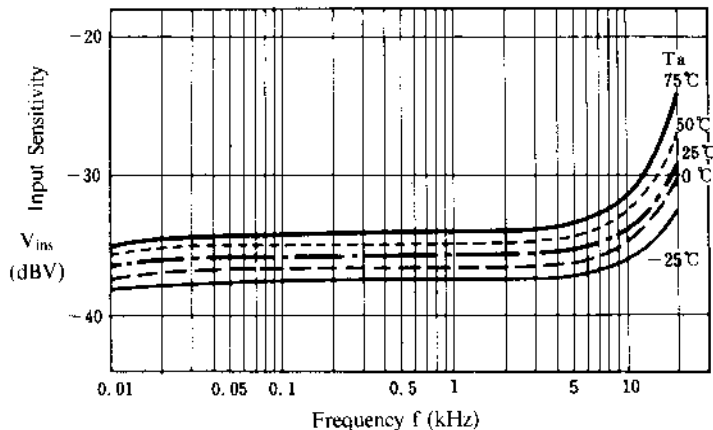

**Input Sensitivity
vs. Ambient Temperature**


($V^+ = 3\text{V}$, $f = 1\text{kHz}$)

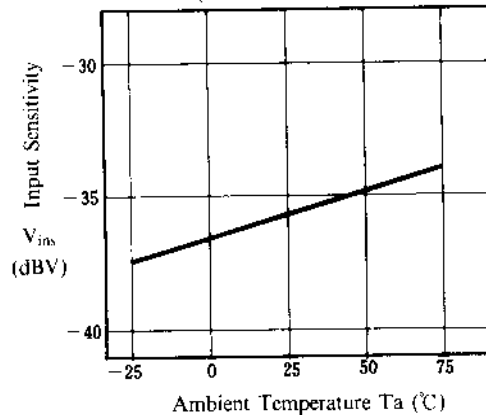

■ TYPICAL CHARACTERISTICS


**Recovery Time
vs. Operating Voltage**

($T_a = 25^\circ\text{C}$, $C_R = 10/\mu\text{F}$)

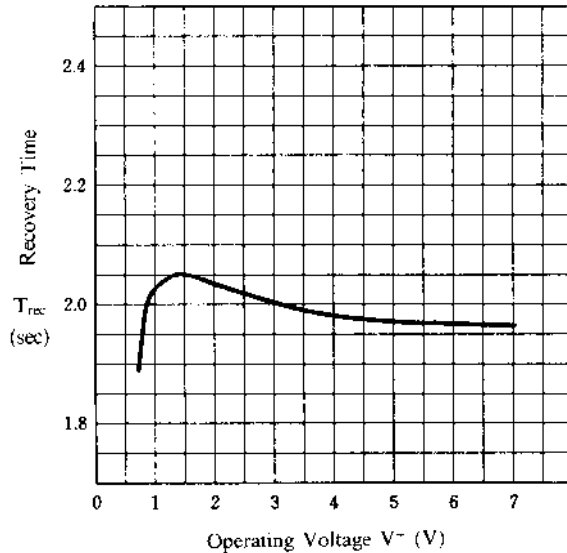


**Input Sensitivity Recovery Time
vs. Ambient Temperature**

($V^+ = 3\text{V}$, $C_R = 10/\mu\text{F}$)

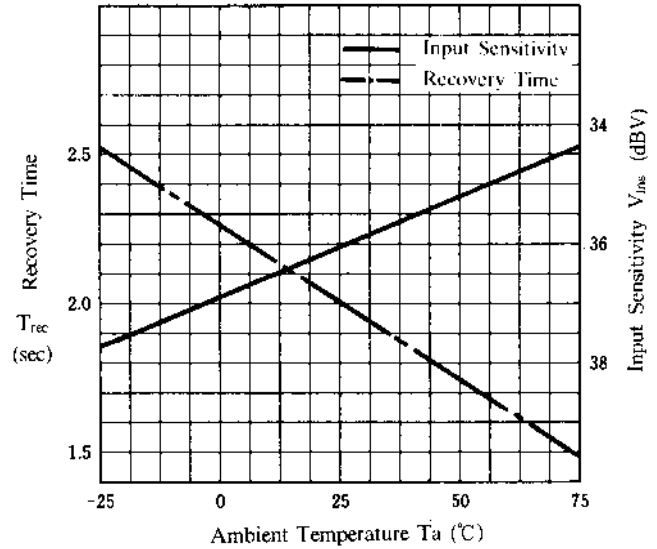


Recovery Time Characteristics

($f = 1\text{kHz}$)

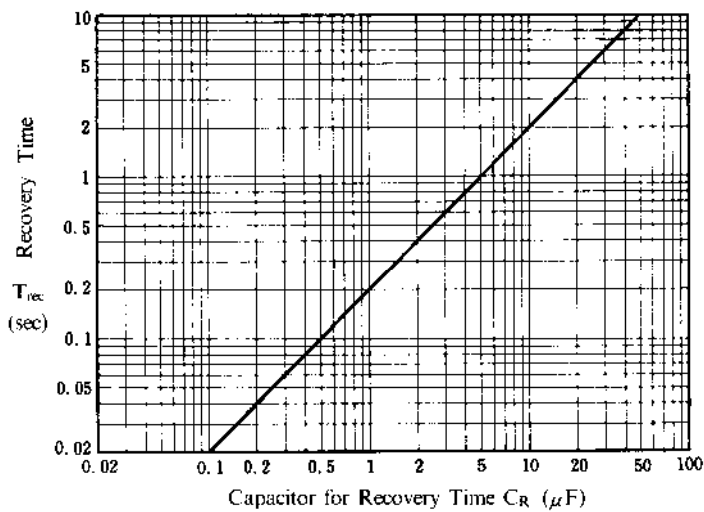


**Input Sensitivity
vs. Operating Voltage**

($f = 1\text{kHz}$)

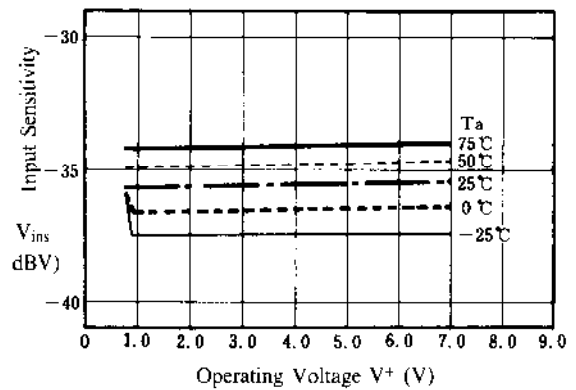

■ TYPICAL APPLICATIONS

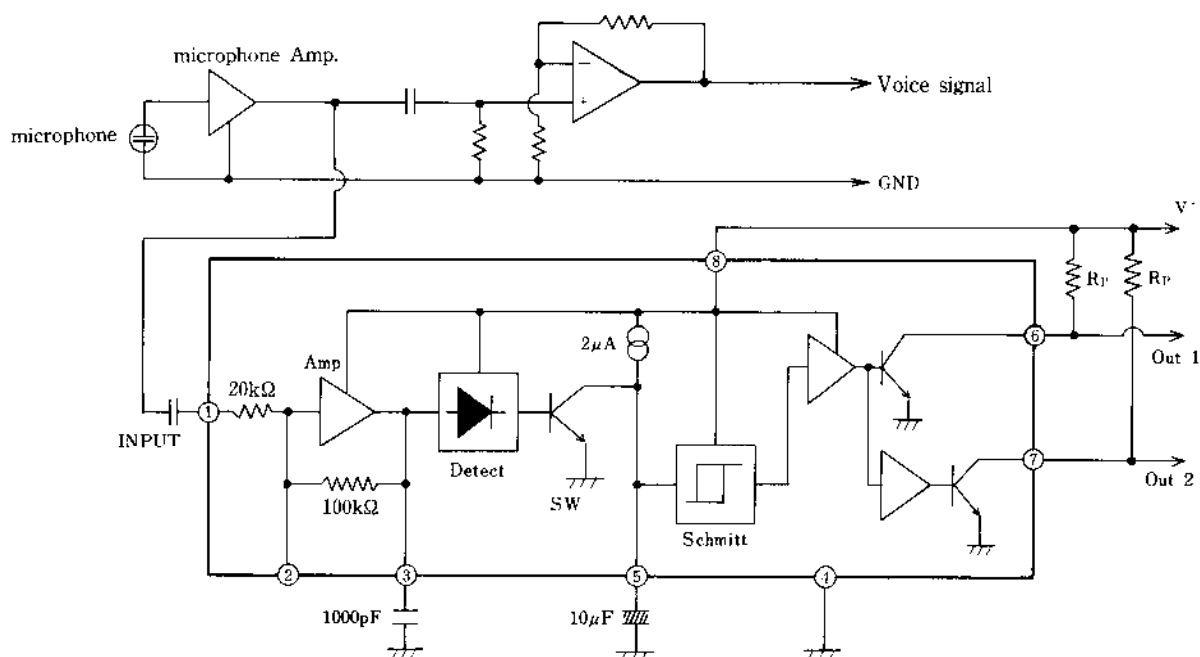


Pins 6 and 7 show an open collector. Mount resistor R_P shown by the following equation.

$$R_P = (V_{MIN}^+ - 0.2) / 0.3 \text{ (k}\Omega\text{)}$$

Resistor R_P to pin 7 is omissible, if pin 6 only is used. But resistor R_P to pin 6 should be put when Out2 only is used.

V_{MIN}^+ is minimum supply voltage.

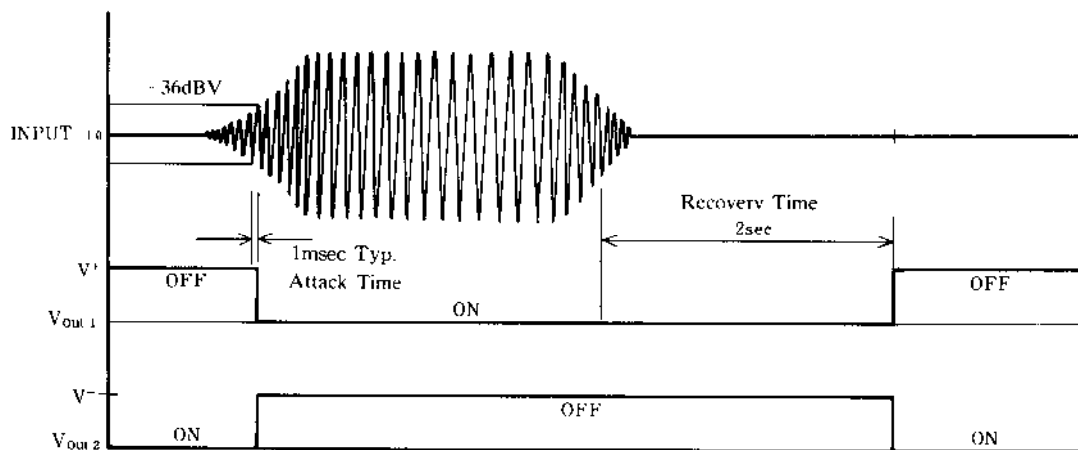

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.