

DESCRIPTION

The JWH3515 is an offline miniature high-voltage power switching regulators with on-chip power switch and startup circuits. The JWH3515 integrates all the active power, control logic and protection circuitry. The JWH3515 can be configured in any single-ended topology such as forward or flyback, and the controller is targeted for applications requiring up to 6 W.

The internal error amplifier allows the JWH3515 to be easily configured for secondary or primary side regulation operation in isolated and non-isolated configurations. The fixed frequency oscillator is optimized for operation up to 1 MHz. In addition, the JWH3515 has the line undervoltage and overvoltage detectors, cycle by cycle current limit and thermal shutdown to protect the controller under fault conditions.

Company's Logo is Protected, "JW" and "JOULWATT" are Registered

Trademarks of Joulwatt Technology Co., Ltd.


FEATURES

- Integrated 200 V Power Switch Circuit and Startup Circuit
- Operation up to 1 MHz
- External Frequency Synchronization Capability
- Line Undervoltage and Overvoltage Detectors
- Cycle by Cycle Current Limit
- Overtemperature Protection
- Internal Error Amplifier
- Pb-Free Packages are Available


APPLICATIONS

- POE (Power Over Ethernet)/PD.
- Secondary Side Bias Supply
- Stand Alone Low Power dc-dc Converter
- Low Power Bias Supply
- Low Power Boost Converter

TYPICAL APPLICATION

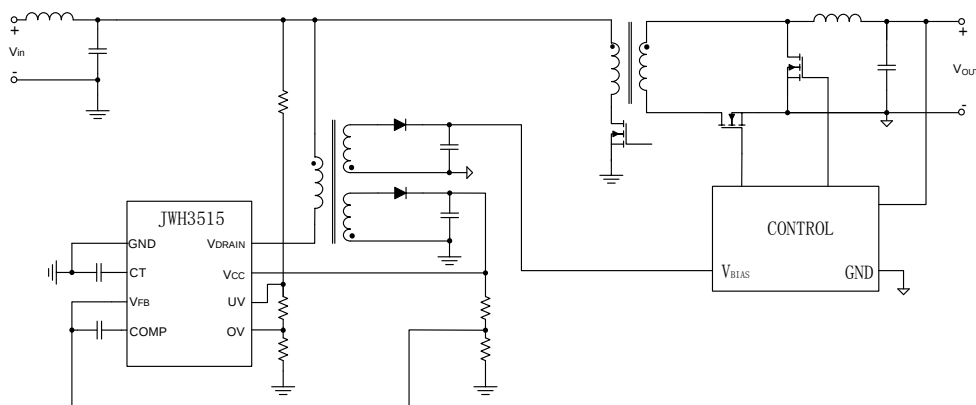


Secondary Side Bias Supply Configuration

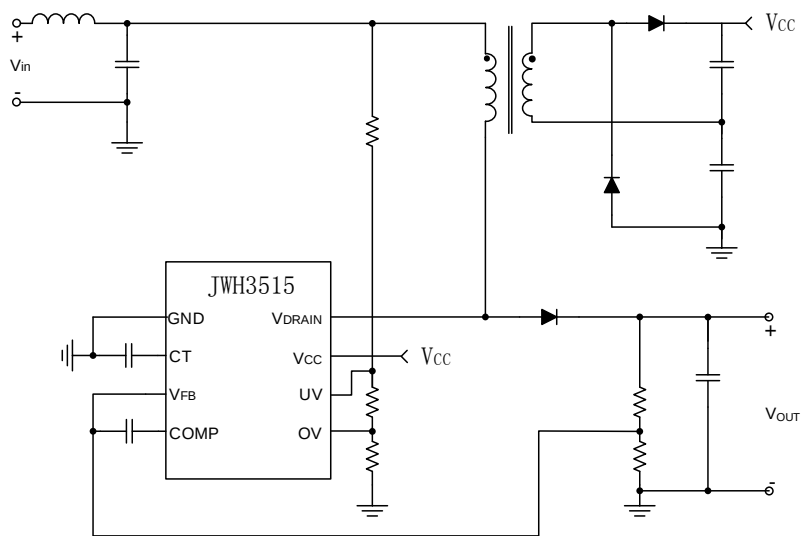
**Boost Circuit Configuration**


ORDER INFORMATION

DEVICE ¹⁾	PACKAGE	TOP MARKING ²⁾	ENVIRONMENTAL ³⁾
JWH3515DFNI#TR	DFN4X4-8	JWH3515 YW□□□□□	Green
JWH3515SOPB#TR	SOP8	JWH3515 YW□□□□□	Green
JWH3515MSOPB#TR	MSOP8	JWH3515 YW□□□□□	Green

Notes:




- 1) 

2) Line1: 

Line2: 

3) All JoulWatt products are packaged with Pb-free and Halogen-free materials and compliant to RoHS standards.

PIN CONFIGURATION

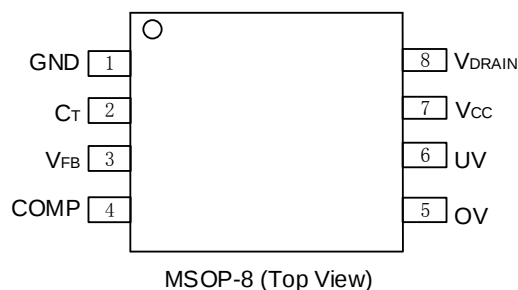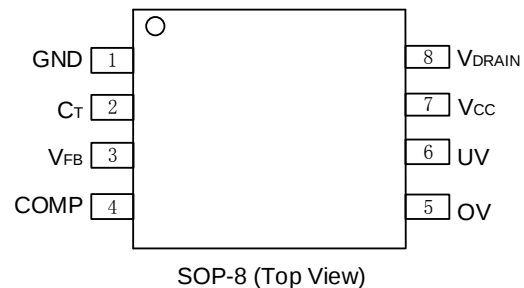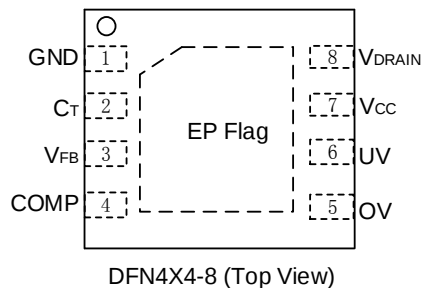

ABSOLUTE MAXIMUM RATING¹⁾

Rating	Symbol	Value	Unit
Power Switch and Startup Circuits Voltage	V_{DRAIN}	-0.3 to 200	V
Power Switch and Startup Circuits Input Current	I_{DRAIN}	2.0	A
V_{CC} Voltage Range	V_{CC}	-0.3 to 16	V
C_T Voltage Range	V_{CT}	-0.3 to 7	V
All Other Inputs/Outputs Voltage Range	V_{IO}	-0.3 to 10	V
V_{CC} and All Other Inputs/Outputs Current	I_{IO}	100	mA
Maximum Operating Junction Temperature ^{2) 3)}	T_J	-40 to 150	°C
Lead Temperature	T_L	260	°C
Storage Temperature	T_{stg}	-55 to 150	°C
ESD Capability (Human Body Model)		>2000	V
ESD Capability (Charge Device Model)		>500	V

RECOMMENDED OPERATING CONDITIONS

V_{CC} Voltage.....9 to 14V
 Operation Junction temperature²⁾..... -40°C to 125°C

THERMAL PERFORMANCE⁴⁾

	θ_{JA}	$\theta_{JC(bot)}$
DFN4X4-8.....	42.....	3.2°C/W
	θ_{JA}	$\theta_{JC(top)}$
SOP-8.....	116.7.....	62.4°C/W
MSOP-8.....	184.7.....	76.8°C/W

Note:

- 1) Exceeding these ratings may damage the device. These stress ratings do not imply function operation of the device at any other conditions beyond those indicated under RECOMMENDED OPERATING CONDITIONS.
- 2) The JWH3515 includes thermal protection that is intended to protect the device in overload conditions. Continuous operation over the specified absolute maximum operating junction temperature may damage the device.
- 3) The device is not guaranteed to function outside of its operating conditions.
- 4) Measured on JESD51-7, 4-layer PCB.

ELECTRICAL CHARACTERISTICS

$V_{DRAIN} = 48\text{ V}$, $V_{CC} = 12\text{ V}$, $C_{CT} = 560\text{ pF}$, $V_{UV} = 3\text{ V}$, $V_{OV} = 2\text{ V}$, $V_{FB} = 2.3\text{ V}$, $V_{COMP} = 2.5\text{ V}$, $T_J = -40^\circ\text{C}$ to 125°C , typical values shown are for $T_J = 25^\circ\text{C}$, unless otherwise stated

Item	Symbol	Condition	Min.	TYP.	Max.	Units
STARTUP CONTROL						
Startup Circuit Output Current	I_{START}	$V_{FB} = V_{COMP}$ $V_{CC} = 0\text{ V}$ $T_J = -40^\circ\text{C}$ to 125°C	11	18	23	mA
		$V_{FB} = V_{COMP}$ $V_{CC} = V_{CC(ON)} - 0.2\text{ V}$ $T_J = -40^\circ\text{C}$ to 125°C	9	17	22	
Turn-On Threshold Voltage	$V_{CC(ON)}$	V_{CC} Increasing $V_{FB} = 2.7\text{ V}$	9.6	10.2	10.6	V
Turn-Off Threshold Voltage	$V_{CC(OFF)}$	V_{CC} Decreasing $V_{FB} = 2.7\text{ V}$	7.0	7.6	8.0	V
Reset Voltage	$V_{CC(RESET)}$	V_{CC} Decreasing $V_{FB} = V_{COMP}$	6.0	6.6	7.0	V
Minimum Startup Voltage	$V_{START(MIN)}$	$I_{START} = 0.5\text{ mA}$, $V_{CC} = V_{CC(ON)} - 0.2\text{ V}$	-	-	16.5	V
ERROR AMPLIFIER						
Reference Voltage	V_{REF}	$V_{COMP} = V_{FB}$ $T_J = -40^\circ\text{C}$ to 125°C	2.45	2.5	2.55	V
Line Regulation	REG_{LINE}	$V_{CC} = 8\text{ V}$ to 16 V , $T_J = 25^\circ\text{C}$	-	1.0	5.0	mV
Input Bias Current	I_{VFB}	$V_{FB} = 2.3\text{ V}$	-	0.1	1.0	μA
COMP Source Current	I_{SRC}	$V_{FB} = 2.3\text{ V}$	80	110	160	μA
COMP Sink Current	I_{SNK}	$V_{FB} = 2.7\text{ V}$	480	570	660	μA
COMP Maximum Voltage	$V_{C(MAX)}$	$V_{FB} = 2.3\text{ V}$	4.5	-	-	V
COMP Minimum Voltage	$V_{C(MIN)}$	$V_{FB} = 2.7\text{ V}$	-	-	1.5	V

Open Loop Voltage Gain (Note 5)	A_{VOL}		-	80	-	dB
Gain Bandwidth Product (Note 5)	GBW		-	1.0	-	MHz
LINE UNDER/OVERVOLTAGE DETECTOR						
Undervoltage Threshold	V_{UV}	$V_{COMP}=V_{FB}$ V_{UV} Increasing	2.400	2.550	2.700	V
Undervoltage Hysteresis	$V_{UV(HYS)}$	$V_{COMP}=V_{FB}$	-	0.175	-	V
UV Input Bias Current	I_{UV}	$V_{COMP}=V_{FB}$	-	0.1	1.0	μA
Overvoltage Threshold	V_{OV}	$V_{COMP}=V_{FB}$ V_{UV} Increasing	2.400	2.550	2.700	V
Overvoltage Hysteresis	$V_{OV(HYS)}$	$V_{COMP}=V_{FB}$	-	0.175	-	V
OV Input Bias Current	I_{OV}	$V_{COMP}=V_{FB}$	-	0	1.0	μA
OSCILLATOR						
Frequency	F_{osc1}	$C_T=560\text{ pF}$ $T_J=25^\circ C$	275	300	325	KHz
		$C_T=560\text{ pF}$ $T_J=-40^\circ C$ to $125^\circ C$	260	-	325	
	F_{osc2}	$C_T=242\text{ pF}$ $T_J=25^\circ C$	-	528	-	
	F_{osc3}	$C_T=124\text{ pF}$ $T_J=25^\circ C$	-	735	-	
Charge Current	$I_{CT(C)}$	$V_{CT}=3.25V$	-	150	-	μA
Discharge Current	$I_{CT(D)}$	$V_{CT}=3.25V$	-	450	-	μA
Oscillator Ramp Peak Voltage	V_{RPK}		3.3	3.5	3.7	V
Oscillator Ramp Valley Voltage	V_{RVLY}		2.8	3.0	3.2	V
PWM COMPARATOR						

Maximum Duty Cycle	DC _{MAX}		70	75	80	%
POWER SWITCH CIRCUIT						
MOS R _{DS(ON)}	R _{DS(ON)}	I _D =100 mA T _J =25 °C	-	2.1	3.0	Ω
		I _D =100 mA T _J =125 °C	-	3.4	5.0	Ω
Breakdown Voltage	V _{(BR)DS}	I _D =100 uA T _J =25 °C	200	-	-	V
Off-State Leakage Current	I _{DS(OFF)}	V _{DRAIN} =190 V, V _{UV} =2.0 V T _J =-40 °C to 125 °C	-	-	30	uA
Switching Rise Time	t _r	V _{DS} =48 V, R _L =100 Ω	-	22	-	nS
Switching Fall Time	t _f	V _{DS} =48 V, R _L =100 Ω	-	45	-	nS
CURRENT LIMIT AND OVER TEMPERATURE PROTECTION						
Current Limit Threshold	I _{LIM}	T _J =25 °C	850	1020	1200	mA
Propagation Delay, Current Limit Threshold to Power Switch Circuit Output	t _{PLH}	T _J =-40 °C to 125 °C	750	1020	1300	ns
Propagation Delay, Current Limit Threshold to Power Switch Circuit Output	t _{PLH}		-	100	-	ns
Thermal Shutdown (Note 6)	T _{SHDN}	Temperature increasing	-	150	-	°C
Thermal Shutdown Hysteresis (Note 6)	T _{HYS}		-	20	-	°C
TOTAL DEVICE						
Supply Current	I _{CC1}	Power Switch Enabled	-	1.8	3	mA
	I _{CC2}	Power Switch Disabled	-	1.3	1.8	

		Non-Fault condition ($V_{FB}=2.7V$)				
	I_{CC3}	Power Switch Disabled Fault condition ($V_{FB}=2.7V$, $V_{UV}=2.0V$)	-	0.82	1.2	


Note:

- 5) Guaranteed by Design.
- 6) Derived from bench characterization. Not tested in production.

PIN DESCRIPTION

PIN DFN4X4-8	NAME	DESCRIPTION
1	GND	The ground of the IC.
2	C _T	An external capacitor connected to this pin sets the oscillator frequency.
3	V _{FB}	The regulated voltage is scaled down to 2.5 V by means of a resistor divider. Regulation is achieved by comparing the scaled voltage to an internal 2.5 V reference.
4	COMP	Requires external compensation network between COMP and VFB pins.
5	OV	Over-voltage protection. When this pin is biased beyond 2.5 V, all pulses immediately stop. If no OVP is used connect this pin to AGND.
6	UV	Line voltage is scaled down using an external resistor divider such that the UV voltage reaches 2.5 V when line voltage reaches its minimum operating voltage.
7	V _{CC}	Bias power input to the controller. A hold-up capacitor to GND is required.
8	V _{DRAIN}	The drain of inner power MOSFET

BLOCK DIAGRAM

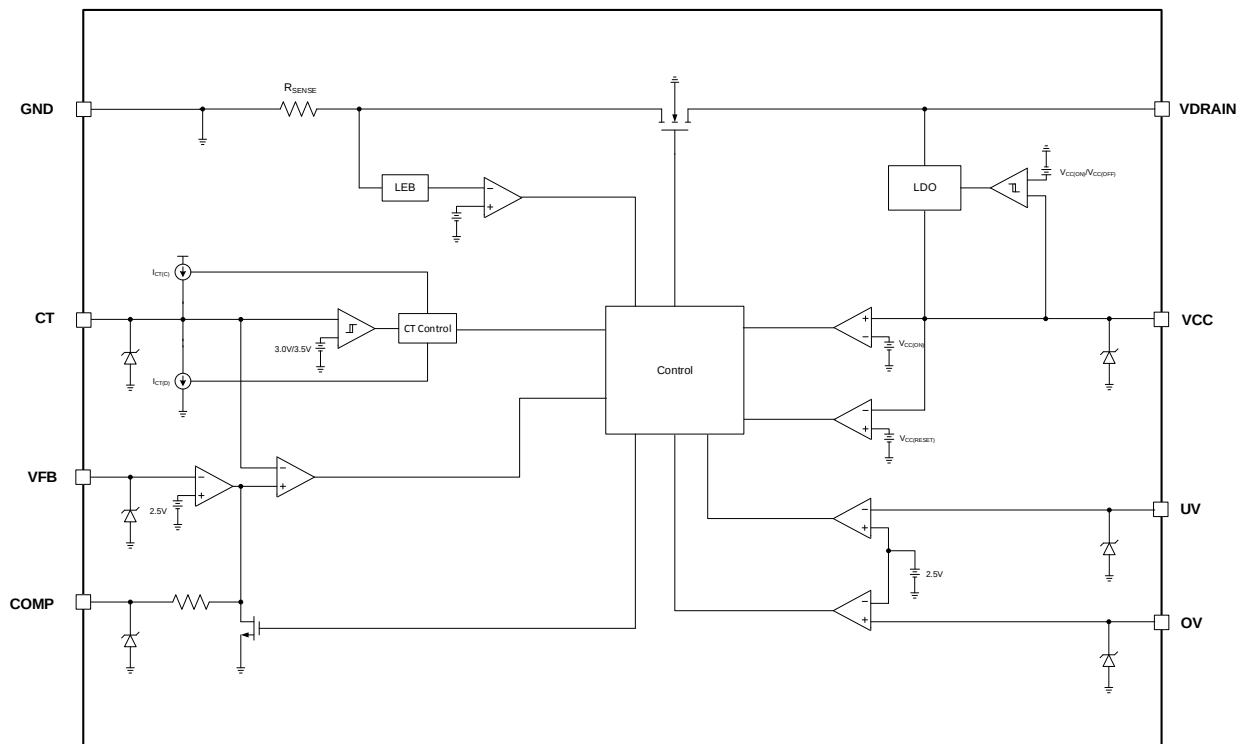

FUNCTIONAL DESCRIPTION

The JWH3515 is an offline miniature high-voltage power switching regulators with on-chip power switch and startup circuits. The internal startup circuit and the MOSFET are rated at 200 V, making them ideal for 48 V telecom and 42 V automotive applications. The JWH3515 has the line undervoltage and overvoltage detectors, cycle by cycle current limit and thermal shutdown to protect the controller under fault conditions. The JWH3515 is targeted for applications up to 6 W.

1. Start-Up

The JWH3515 contains an internal 200 V startup regulator. The startup regulator consists of a constant current source that supplies current from a high-voltage rail to the capacitor on the VCC pin. The startup circuit current is 18 mA. The internal high voltage startup circuit eliminates the need for external startup components. In addition, this regulator reduces no-load power and increases the system efficiency as it uses negligible power in the normal operation mode.

As soon as V_{CC} reaches turn-on threshold $V_{CC(ON)}$, the internal startup circuit is disabled. The controller is enabled and the converter starts switching. If V_{CC} falls below $V_{CC(OFF)}$, the device enters a re-start mode. While in the re-start mode, the V_{CC} capacitor is allowed to discharge to $V_{CC(RESET)}$ while the Power Switch is enabled. Once the $V_{CC(RESET)}$ threshold is reached, the Power Switch Circuit is disabled and the startup regulator is enabled to charge the VCC capacitor. The Power Switch is enabled again once the VCC voltage reaches $V_{CC(ON)}$.

2. Error Amplifier

The internal error amplifier (EA) regulates the

output voltage of the bias supply. It compares a scaled output voltage signal to an internal VREF connected to its non-inverting input. The scaled signal is fed into the feedback pin (VFB) which is the inverting input of the error amplifier.

The error amplifier output source and sink currents are typically 127uA and 570uA, respectively.

3. Line Under and Overvoltage Detector

The JWH3515 incorporates individual line undervoltage (UV) and overvoltage (OV) shutdown circuits. When the UV is below 2.5 V or if the OV voltage is above 2.5 V. It immediately stops switching pulses and internally pulls down the COMP. The UV/OV circuits can be biased using an external resistor divider from the input line as shown in Figure 1.




Figure 1. UV/OV resistor divider from the input line

4. Oscillator

The oscillator frequency is set by the external timing capacitor (C_T) connected to the C_T pin. The oscillator has two modes of operation, free running and synchronized (sync). While in free running mode, an internal current source charges and discharges C_T generating a voltage ramp between 3.0 V and 3.5 V. Under normal operating conditions, the charge ($I_{CT(C)}$) and discharge ($I_{CT(D)}$) currents are typically 150uA

and 450uA, respectively. The Power Switch is disabled while CT is discharging, guaranteeing a maximum duty cycle of 75 % as shown in Figure 2.

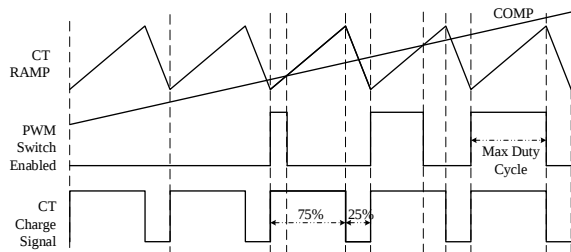


Figure 2. Duty cycle vs COMP

Figure 3 shows the relationship between the operating frequency and C_T . The oscillator can be synchronized to a higher frequency by capacitively coupling a synchronization pulse into the C_T pin. Figure 4 shows pulsing the CT pin before it reaches 3.5 V to trigger the internal comparator and complete the CT charging period.

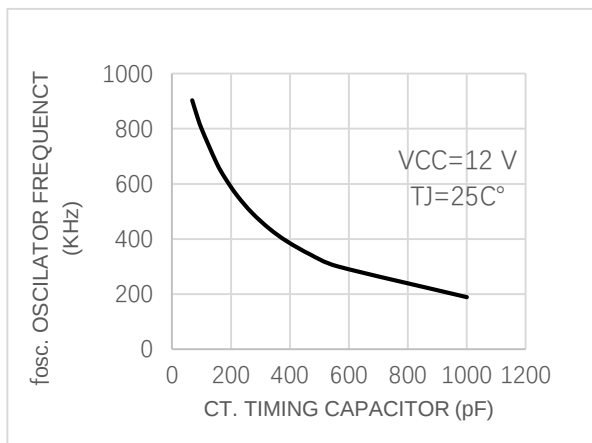


Figure 3. Oscillator frequency vs C_T

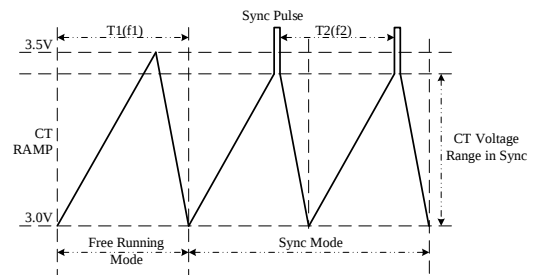


Figure 4. External frequency synchronization waveforms

The oscillator frequency should be set no more that 25% below the target sync frequency to maintain an adequate voltage range and provide good noise immunity. Figure 5 shows the recommended C_T circuit for synchronize the oscillator.

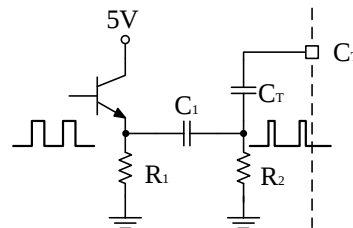


Figure 5. External frequency synchronization circuit

5. PWM Comparator and Latch

The Pulse Width Modulator (PWM) Comparator compares the error amplifier output (COMP) to the C_T Ramp and generates a proportional duty cycle. Figure 2 shows the relationship between the duty cycle and COMP. The Power Switch is disabled while the C_T Ramp is higher than COMP. The Power Switch is enabled while the C_T Ramp is below COMP. If COMP is at the bottom of the C_T Ramp, the converter operates at minimum duty cycle. While COMP increases, the duty cycle increases, until COMP reaches the peak of the C_T Ramp, at which point the controller operates at maximum duty cycle.

6. Current Limit Comparator and Power Switch Circuit

The drain current is monitored by sampling the voltage of the built-in sense element, RSENSE. If the sense voltage exceeds the reference level, the comparator resets the PWM Latch and switching is terminated.


In order to avoid the premature termination of the switching pulse due to the parasitic capacitance, an internal leading-edge blanking (t_{PLH}) is used.

The current comparator is disabled and can't turn off the MOSFET during the blanking time.

7. Thermal Shutdown


The internal over-temperature protection threshold is 150°C. If the junction temperature of the device reaches this threshold the device shuts down. When the junction temperature falls to 130°C, the device is allowed to resume normal operation.

TAPE AND REEL INFORMATION

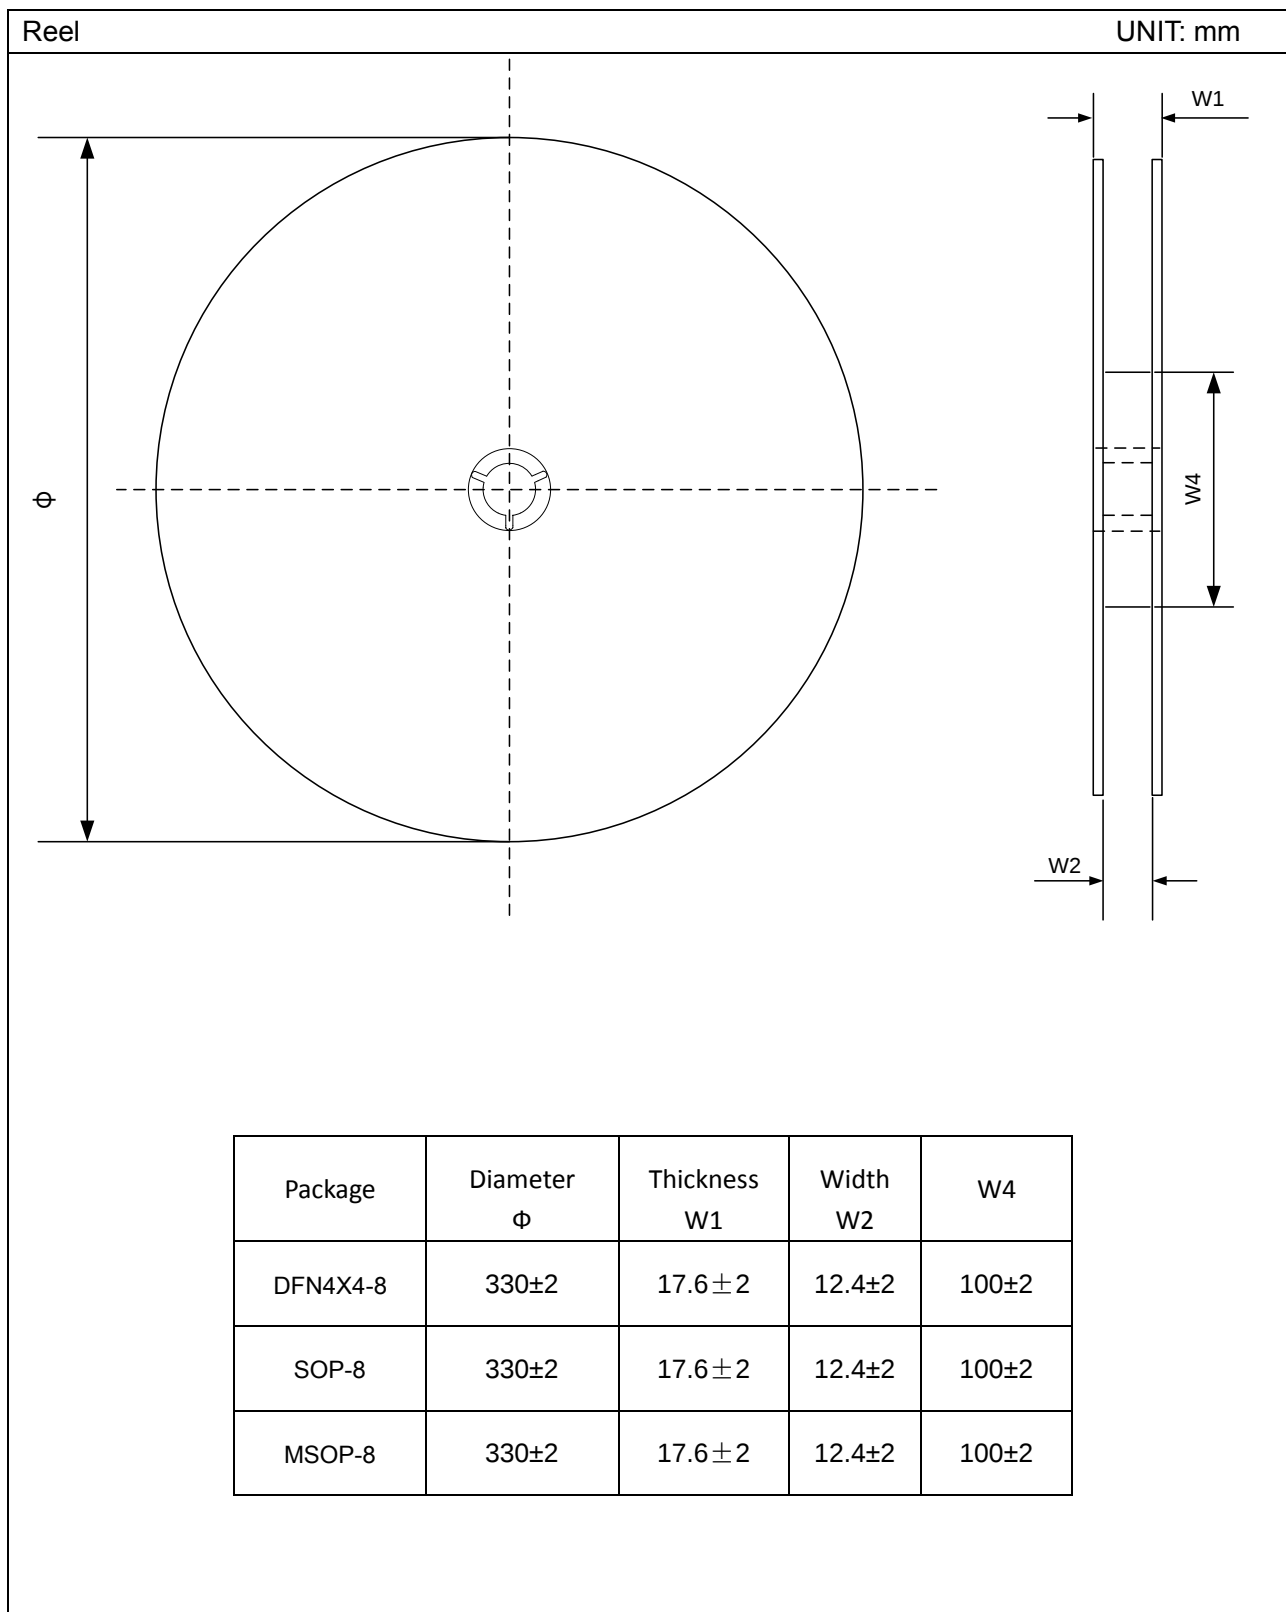

Carrier Tape

UNIT: mm

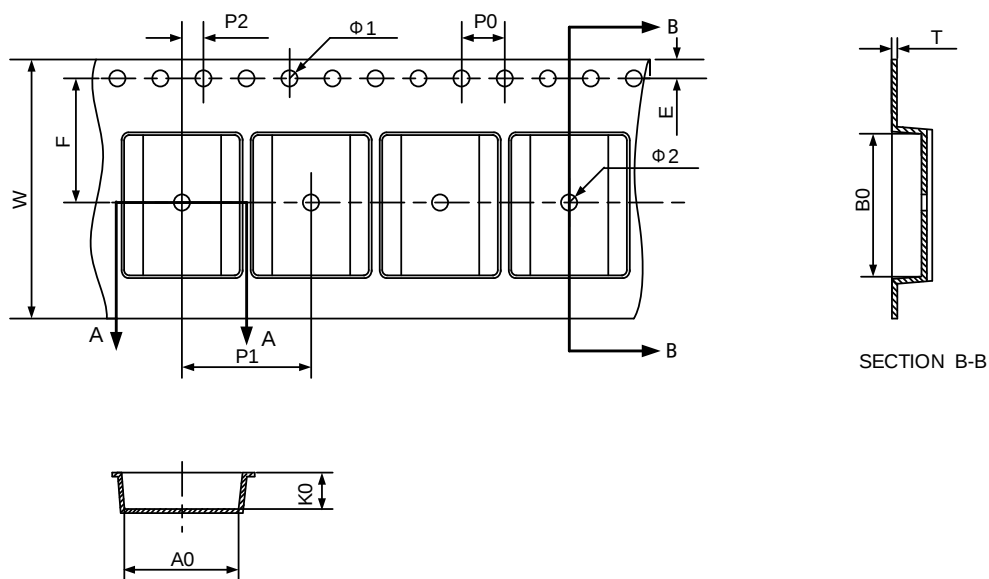


Note :

- 1) The carrier type is black, and colorless transparent.
- 2) Carrier camber is within 1mm in 100mm.
- 3) 10 pocket hole pitch cumulative tolerance: ± 0.20 .
- 4) All dimensions are in mm.




Package	Tape dimensions(mm)											
	P0	P2	P1	A0	B0	W	T	K0	Φ1	Φ2	E	F
DFN4X4-8	4.0 $\pm$ 0.10	2.0 $\pm$ 0.10	8.0 $\pm$ 0.2	4.30 $\pm$ 0.2	4.30 $\pm$ 0.2	12.0 $\pm$ 0.3	0.25 $\pm$ 0.10	1.10 $\pm$ 0.2	1.50 $\pm$ 0.10	1.50 $\pm$ 0.25	1.75 $\pm$ 0.1	5.50 $\pm$ 0.10
SOP-8	4.0 $\pm$ 0.1	2.0 $\pm$ 0.1	8.0 $\pm$ 0.1	6.40 $\pm$ 0.3	5.35 $\pm$ 0.3	12.0 $\pm$ 0.3	0.25 $\pm$ 0.2	2.00 $\pm$ 0.2	1.50min	1.50min	1.75 $\pm$ 0.1	5.50 $\pm$ 0.10
MSOP-8	4.0 $\pm$ 0.1	2.0 $\pm$ 0.10	8.0 $\pm$ 0.1	5.2 $\pm$ 0.1	3.3 $\pm$ 0.1	12 $\pm$ 0.30	0.25 $\pm$ 0.10	1.20 $\pm$ 0.1	1.5 $\pm$ 0.10	1.5 $\pm$ 0.25	1.75 $\pm$ 0.1	5.50 $\pm$ 0.10

PACKAGE OUTLINE

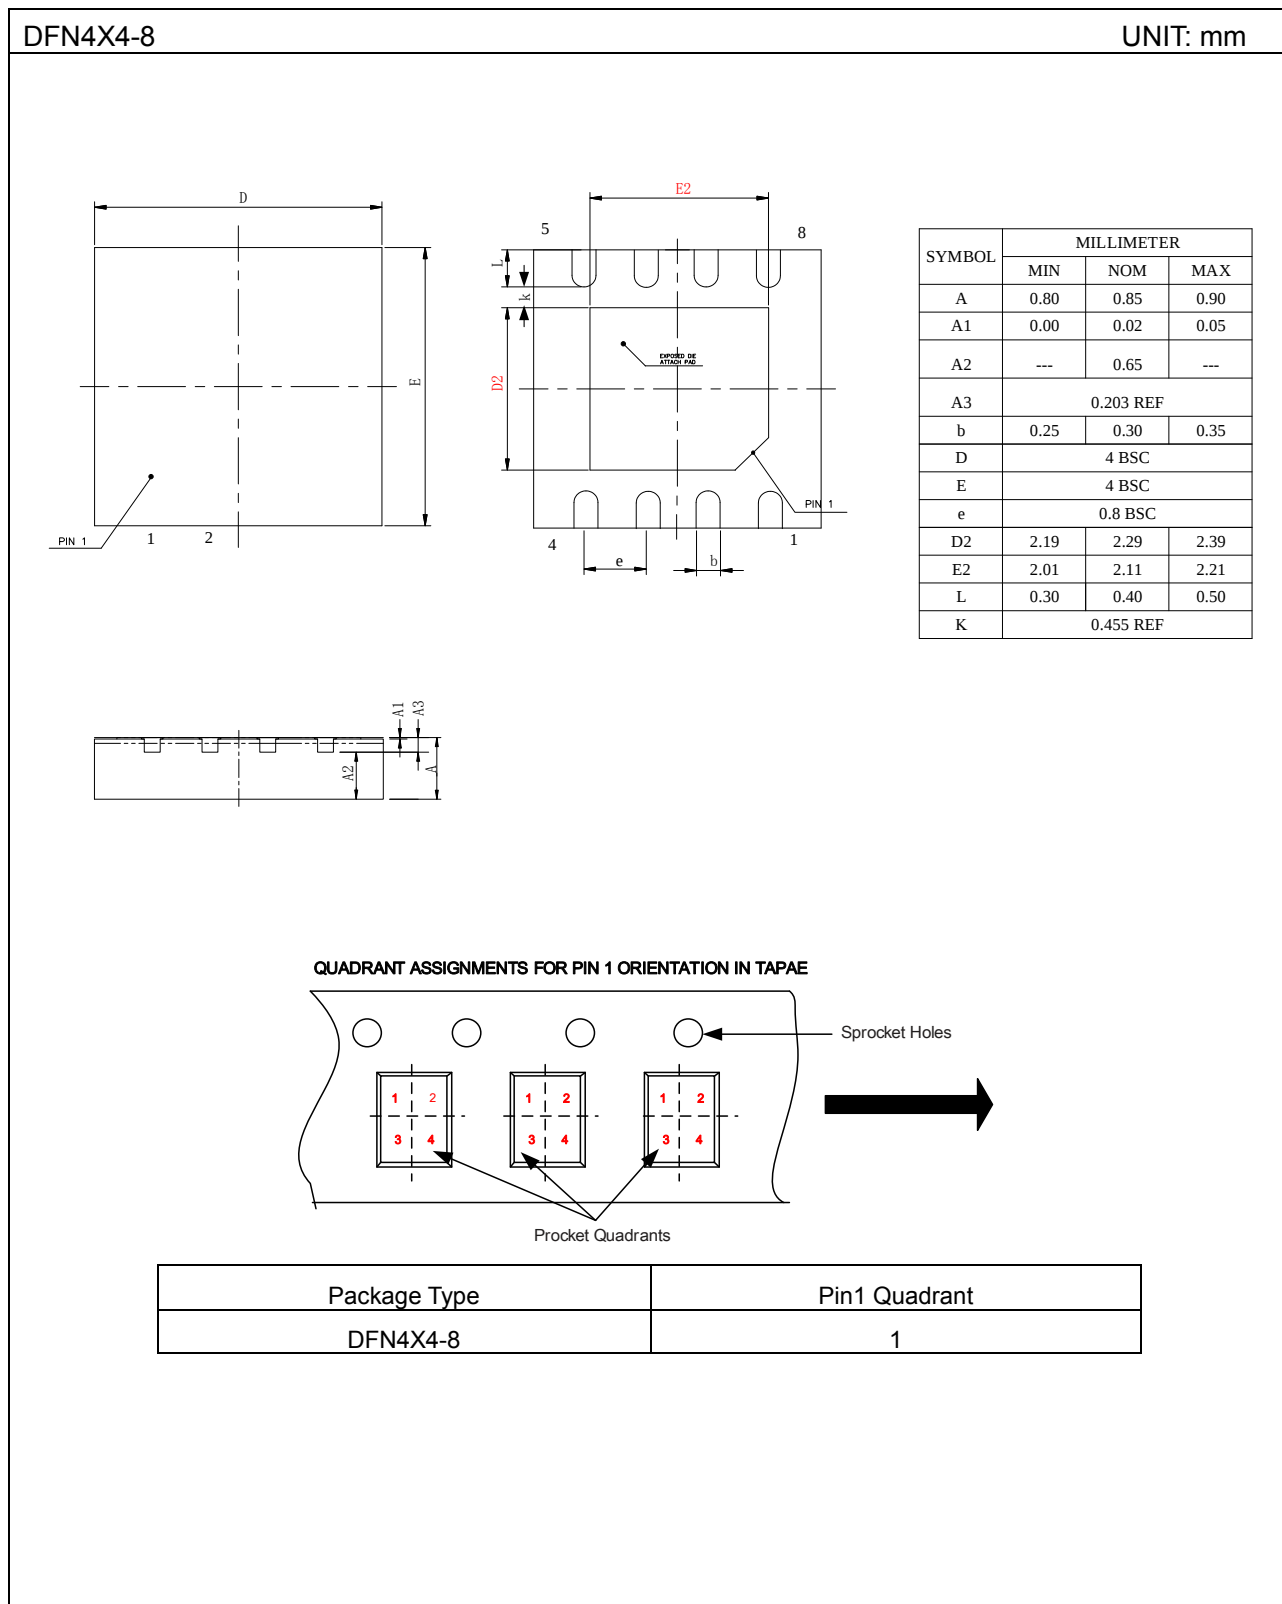


SOP-8

UNIT: mm

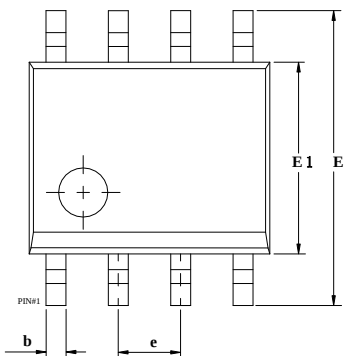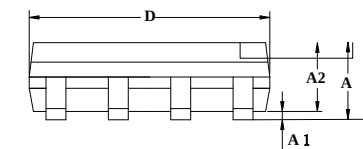

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	1.45	1.60	1.75
A1	0.10	---	0.25
A2	1.35	1.45	1.55
b	0.33	0.42	0.51
c	0.17	0.203	0.25
e	1.27BSC		
D	4.70	4.90	5.10
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
L	0.40	---	1.27
θ	0°	--	8°



QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPAE

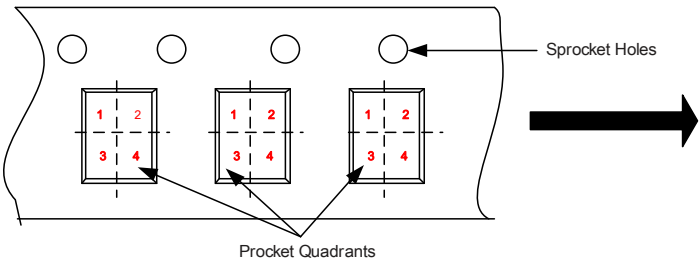


Package Type	Pin1 Quadrant
SOP-8	1

MSOP-8


UNIT: mm

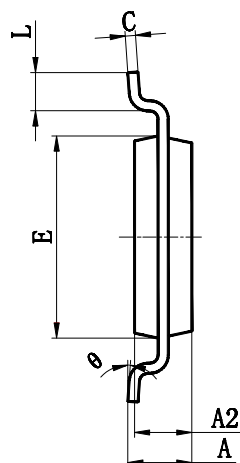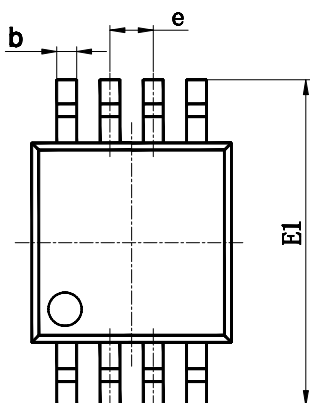

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	---	---	1.10
A1	0.02	---	0.15
A2	0.75	0.85	0.95
b	0.25	---	0.38
c	0.09	---	0.23
D	2.90	3.00	3.10
e	0.65 BSC		
E	2.90	3.00	3.10
E1	4.75	4.90	5.05
L	0.40	0.60	0.80
θ	0°	---	6°



QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPAE

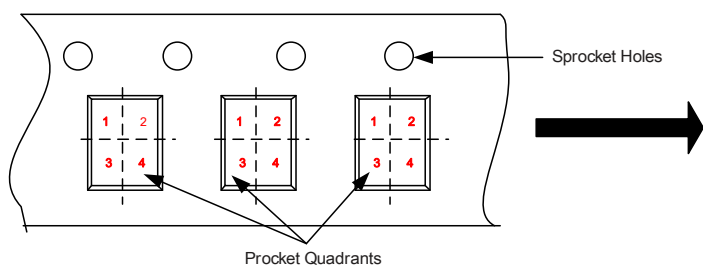

Package Type	Pin1 Quadrant
MSOP-8	1

IMPORTANT NOTICE

- Joulwatt Technology Co.,Ltd reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein.
- Any unauthorized redistribution or copy of this document for any purpose is strictly forbidden.
- Joulwatt Technology Co.,Ltd does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
- JOULWATT TECHNOLOGY CO.,LTD PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION AND OTHER RESOURCES, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

Copyright © 2022 JoulWatt

All rights are reserved by Joulwatt Technology Co.,Ltd