

KAB-51146-0500-0500LI



LED-Backlight Kabel

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

1. Funktionale Beschreibung

Dieses Kabel bietet Ihnen die Möglichkeit, schnell und einfach eine Verbindung zwischen einem Display LED Backlight mit einem Steckverbinder der MOLEX PanelMate™ Serie 51146 und einem beliebigen Anschluss herzustellen. Wir liefern Ihnen ein 5pol. Litzenkabel mit komplett montierten Buchsengehäuse, die zweite Seite des Kabels ist unbearbeitet. Dieses Kabel ist besonders für Muster und Kleinstserien geeignet.

Kabel bestehend aus:

- Seite 1: 51146-0500 mit Crimpkontakt 50641-8041 oder H208K-P05N-02B mit Crimpkontakt M002-G07N-02R
- Seite 2: unbearbeitet
- Litze farbcodiert AWG28
- L= 500mm

Vorteile auf einen Blick:

- sofort ab Lager verfügbar
- individuell konfektionierbar
- andere Längen kurzfristig lieferbar

Die Konfektionierung dieser Leitung sowie die Herstellung des gesamten anschlussfertigen Kabels bieten wir Ihnen gerne auch als Mustermenge an. Bitte kontaktieren Sie uns. Wir machen Ihnen gerne ein unverbindliches Angebot.

Dieses Kabel passt zu nachfolgenden Stiftleisten:

- MOLEX 53780-0570
- ENTERY H208K-P05N-02B / 3808K-F05N-02R


Dieses Kabel passt zu nachfolgenden Displays:

G104SN02-V2, G121SN01 V4, G085VW01 V0, G104VN01, TCG121SVLBA, TCG104VGLBA, TCG104SVLAA, TM104SDH03, G121NX01

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

2. Bilder

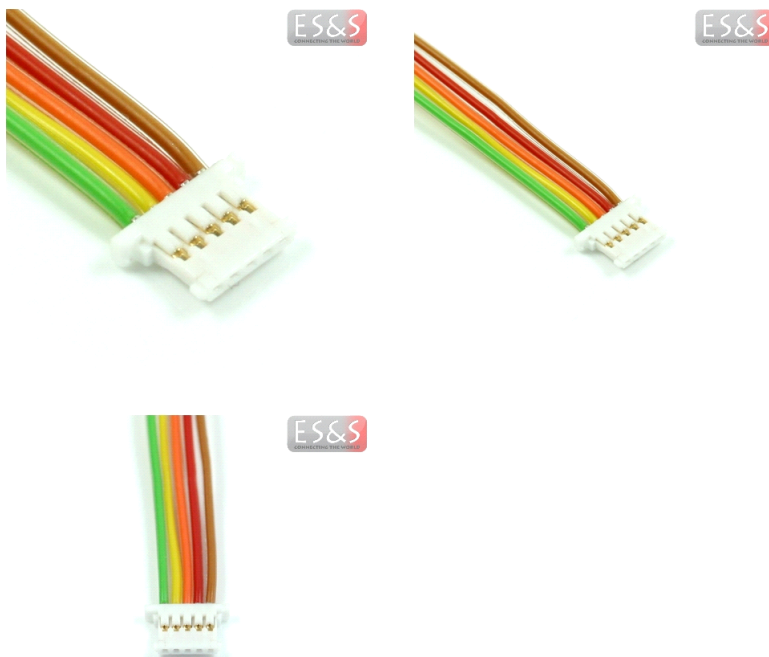

3. Abmessung

Größe: 500,0 (L) (in mm)

4. Temperaturbereiche

Betriebstemperatur: -20°C bis 85°C

Lagertemperatur: -40°C bis 85°C

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support



DATASHEET

KAB-51146-0500-0500LI

5. Gewicht

Gewicht ohne Verpackung: 4,6 g

Gewicht mit Verpackung: 7,1 g

ES&S Solutions GmbH · Gewerbering 2 · 41751 Viersen · GERMANY · www.esskabel.de
fon: +49 (0)2162 - 266 18 0 · fax: +49 (0)2162 - 266 18 88 · info@esskabel.de

REV: 1.00 4/4
Copyright© 2013

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

KAB-51146-0500-0500LI

DATASHEET