


KAB-DF14-20S-1.25C-0500FK

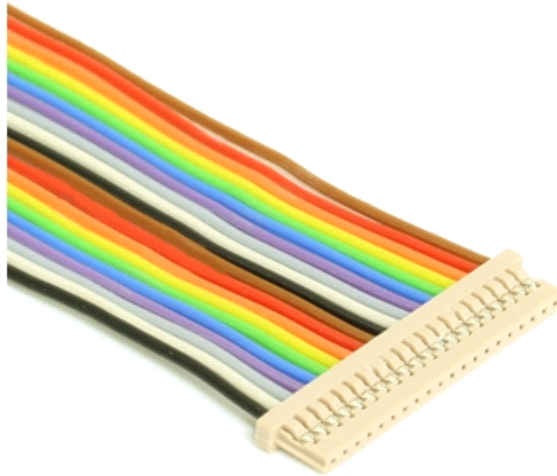

Displaykabel, einseitig offen mit Hirose DF14-20S-1.25C Steckverbinder

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

1. Funktionale Beschreibung

Dieser Kabelsatz bietet Ihnen die Möglichkeit, schnell und einfach eine Verbindung zwischen einem Display mit einem Steckverbinder der DF14 Serie und einem beliebigen Grafikboardsteckverbinder herzustellen. Wir liefern Ihnen ein farbcodiertes AWG28 Flachbandkabel mit einem 20 pol. Hirose DF14 Steckverbinder. Die zweite Seite des Kabels ist unbearbeitet.

Technische Daten:

- Seite 1: DF14-20S-1.25C
- Seite 2: offen
- Flachbandleitung, farbcodiert, AWG28, Braun auf Pin 1 gesteckt, 500 mm lang

Vorteile auf einen Blick

sofort ab Lager verfügbar

individuell bestückbar

andere Längen kurzfristig lieferbar

Die Konfektionierung dieser Leitung sowie die Herstellung des gesamten anschlussfertigen Kabels bieten wir Ihnen gerne auch als Mustermenge an. Bitte kontaktieren Sie uns. Wir machen Ihnen gerne ein unverbindliches Angebot.

Dieses Kabel passt zu nachfolgenden Stiftleisten:

DF14-20P-1.25H, MSB240420, MSB240420-E, P240420, GT123-20P-H16, GT123-20S-CS, 3804-F20N-06R, CWY20G-A0D1T

Folgende Display werden unterstützt:

AA150XN01, AA150XN02, G150XG01, G150XG02, G150XG03, LB150X02, LB150X06, LC150X01, LC150X01-A3, LC150X01-SL01, LC150X02, LC150X02-A4, LC150X02-TL01, LC151X01-C3, LC171W03, LC171W03-A4, LC171W03-C4, LC230W01, LC230W01-A2, LC260W01, LC260W01-A5K1, LM150X08, LQ150X1LG45, LQ150X1LG55, LQ150X1LGB1, LQ150X1LGN2, LQ150X1LGN2A, LQ150X1LGN2E, LQ150X1LW71N, LQ150X1LW72, LTM150XH, LTM150XH-L01, LTM150XO-L01, M150XN07, M170XW01, NL10276BC30-17, NL10276BC30-18, NL10276BC30-18C, NL10276BC30-32D, NL10276BC30-33D, NL128102AC31-02, NL12876BC26-25,

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

T140VN01, T201VN02V0, T-51863D150J-FW-A-AA, T-51863D150J-FW-A-AB, T-51863D150J-FW-A-AD, T-51863D150J-FW-A-AE, G150X1, G121SN01, G121SN01V1, G121SN01V2, G121SN01V3, G150XG03V2, G121SN01V4, NL10276BC30-33D, LQ150X1LW71N, LQ150X1LG82, G150XG02V1, T-55519D150J-LW-A-AAN, G121SN01-V4, NL10276BC30-34D, HT15X15, G121NX01, G150XG01 V3, LQ150X1LG91

2. Bilder



3. Abmessung

Größe: 500,0 (L) (in mm)

4. Temperaturbereiche

Betriebstemperatur: -20°C bis 85°C

Lagertemperatur: -40°C bis 85°C

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support



DATASHEET

KAB-DF14-20S-1.25C-0500FK

5. Gewicht

Gewicht ohne Verpackung: 18,3 g

Gewicht mit Verpackung: 22,8 g

ES&S Solutions GmbH · Gewerbering 2 · 41751 Viersen · GERMANY · www.esskabel.de
fon: +49 (0)2162 - 266 18 0 · fax: +49 (0)2162 - 266 18 88 · info@esskabel.de

REV: 1.00 4/4
Copyright© 2012

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

KAB-DF14-20S-1.25C-0500FK

DATASHEET