

KAB-SET-DF14-20S-DF14-XXS-0500RK



LVDS Display Kabel Set

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

1. Funktionale Beschreibung

Dieser Kabelsatz bietet Ihnen die Möglichkeit, schnell und einfach eine Verbindung zwischen einem Display mit einem Hirose Steckverbinder DF14-20S-1.25C und einem beliebigen Grafikboardsteckverbinder der Serie Hirose DF14 in 20- oder 30-pol. herzustellen.

Wir liefern Ihnen ein 20 poliges Rundkabel mit einem Hirose Steckverbinder DF14-20S-1.25C für Seite 1.

Für Seite 2 liegen zwei Hirose Steckverbinder DF14-20S-1.25C, DF14-30S-1.25C bei. Das Rundkabel hat beidseitig montierte Crimpkontakte und wird ungesteckt geliefert.

Sie können dann ganz einfach nach Ihren eigenen Kabelplänen die Kontakte in die entsprechenden Gehäusekammern bestücken und so eine optimale Funktion und Zuweisung der Paare zu den Signalstrukturen erzielen.

Dieses Kabel ist besonders für den Prototypenbau, Muster und Kleinstserien geeignet.

Technische Daten:

- Seite 1: DF14-20S-1.25C
- Seite 2: DF14-20S-1.25C, DF14-30S-1.25C
- beide Seiten sind ungesteckt, 20 polig, hochflexibles Rundkabel, LTG-DCY, paarig verseilt, UL2560, AWG28, abgeschirmt, Länge = 500 mm

Vorteile auf einen Blick:

- Mustermengen ab Lager verfügbar
- beidseitig individuell bestückbar
- andere Längen auf Anfrage lieferbar
- abgeschirmt
- mit Twisted Pair
- für LVDS geeignet
- Dieses Kabel wird beidseitig ungesteckt mit passenden Buchsen angeliefert!

Dieses Kabel passt zu nachfolgenden Stiftleisten:

DF14-20P-1.25H, MSB240420, MSB240420-E, P240420, GT123-20P-H16, GT123-20S-CS, 3804-F20N-06R, CWY20G-A0D1T


Folgende Displays werden unterstützt:

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

AA150XN01, AA150XN02, G150XG01, G150XG02, G150XG03, LB150X02, LB150X06, LC150X01, LC150X01-A3, LC150X01-SL01, LC150X02, LC150X02-A4, LC150X02-TL01, LC151X01-C3, LC171W03, LC171W03-A4, LC171W03-C4, LC230W01, LC230W01-A2, LC260W01, LC260W01-A5K1, LM150X08, LQ150X1LG45, LQ150X1LG55, LQ150X1LGB1, LQ150X1LGN2, LQ150X1LGN2A, LQ150X1LGN2E, LQ150X1LW71N, LQ150X1LW72, LTM150XH, LTM150XH-L01, LTM150XO-L01, M150XN07, M170XW01, NL10276BC30-17, NL10276BC30-18, NL10276BC30-18C, NL10276BC30-32D, NL10276BC30-33D, NL128102AC31-02, NL12876BC26-25, T140VN01, T201VN02V0, T-51863D150J-FW-A-AA, T-51863D150J-FW-A-AB, T-51863D150J-FW-A-AD, T-51863D150J-FW-A-AE, G150X1, G121SN01, G121SN01V1, G121SN01V2, G121SN01V3, G150XG03V2, G121SN01V4, NL10276BC30-33D, LQ150X1LW71N, LQ150X1LG82, G150XG02V1, T-55519D150J-LW-A-AAN, G121SN01-V4, NL10276BC30-34D, HT15X15, G121NX01, G150XG01 V3, LQ150X1LG91

2. Bilder

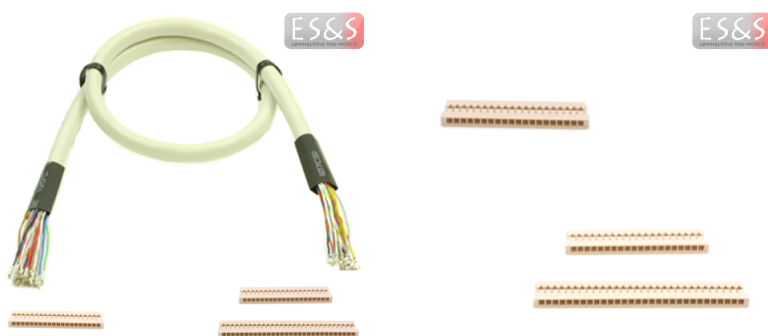

3. Abmessung

Größe: 500,0 (L) (in mm)

4. Temperaturbereiche

Betriebstemperatur: -20°C bis 85°C

Lagertemperatur: -40°C bis 85°C

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support



DATASHEET

KAB-SET-DF14-20S-DF14-XXS-0500RK

5. Gewicht

Gewicht ohne Verpackung: 31,9 g

Gewicht mit Verpackung: 39,9 g

KAB-SET-DF14-20S-DF14-XXS-0500RK

ES&S Solutions GmbH · Gewerbering 2 · 41751 Viersen · GERMANY · www.esskabel.de
fon: +49 (0)2162 - 266 18 0 · fax: +49 (0)2162 - 266 18 88 · info@esskabel.de

REV: 1.00 4/4
Copyright© 2012

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Solutions GmbH takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

DATASHEET