

#### 8.89mmx3.81mm LED LIGHT BAR

KB2500SGD

SUPER BRIGHT GREEN


#### **Features**


- •UNIFORM LIGHT EMITTING AREA.
- •LOW CURRENT OPERATION.
- •EASILY MOUNTED ON P.C. BOARDS.
- •FLUSH MOUNTABLE.
- ●EXCELLENT ON/OFF CONTRAST.
- •CAN BE USED WITH PANELS AND LEGEND MOUNTS.
- •CATEGORIZED FOR LUMINOUS INTENSITY.
- ●RoHS COMPLIANT.


#### **Description**


The Super Bright Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

# Package Dimensions & Internal Circuit Diagram









#### Notes:

- 1. All dimensions are in millimeters (inches), Tolerance is  $\pm 0.25 (0.01")$  unless otherwise noted.
- 2. Specifications are subject to change without notice.

SPEC NO: DSAA4477 APPROVED: J. Lu REV NO: V.4 CHECKED: Joe Lee DATE: APR/21/2005 DRAWN: Y.W.WANG PAGE: 1 OF 3

WERNED at 45 to central Student U.com

# Kingbright

### **Selection Guide**

| Part No.  | Dice                     | Lens Type      | Iv (mcd)<br>© 20mA |      |
|-----------|--------------------------|----------------|--------------------|------|
|           |                          |                | Min.               | Тур. |
| KB2500SGD | SUPER BRIGHT GREEN (GaP) | GREEN DIFFUSED | 7                  | 40   |

## Electrical / Optical Characteristics at Ta=25°C

| Symbol | Parameter                | Device             | Тур. | Max. | Units | Test Conditions           |
|--------|--------------------------|--------------------|------|------|-------|---------------------------|
| λpeak  | Peak Wavelength          | Super Bright Green | 565  |      | nm    | I=20mA                    |
| λD     | Dominant Wavelength      | Super Bright Green | 568  |      | nm    | I=20mA                    |
| Δλ1/2  | Spectral Line Half-width | Super Bright Green | 30   |      | nm    | I=20mA                    |
| С      | Capacitance              | Super Bright Green | 15   |      | pF    | V <sub>F</sub> =0V;f=1MHz |
| VF     | Forward Voltage          | Super Bright Green | 2.2  | 2.5  | V     | I=20mA                    |
| lR     | Reverse Current          | Super Bright Green |      | 10   | uA    | V <sub>R</sub> = 5V       |

### Absolute Maximum Ratings at Ta=25°C

| Parameter                     | Super Bright Green  | Units |
|-------------------------------|---------------------|-------|
| Power dissipation             | 105                 | mW    |
| DC Forward Current            | 25                  | mA    |
| Peak Forward Current [1]      | 140                 | mA    |
| Reverse Voltage               | 5                   | V     |
| Operating/Storage Temperature | -40°C To +85°C      |       |
| Lead Solder Temperature [2]   | 260°C For 5 Seconds |       |


- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
  2. 5mm below package base.

SPEC NO: DSAA4477 APPROVED: J. Lu

**REV NO: V.4 CHECKED:** Joe Lee DATE: APR/21/2005 DRAWN: Y.W.WANG

PAGE: 2 OF 3 WERNED at a 5 to one of \$1 U.com


# Kingbright

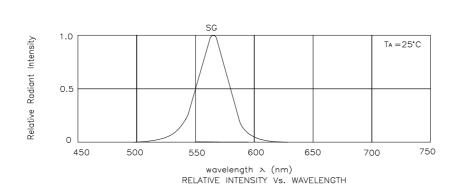



www.DataSheet4U.com


**Super Bright Green** 

KB2500SGD









#### Remarks:

If special sorting is required (e.g. binning based on forward voltage, luminous intensity, or wavelength), the typical accuracy of the sorting process is as follows:

- 1. Wavelength: +/-1nm
- 2. Luminous Intensity: +/-15%
- 3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

SPEC NO: DSAA4477 APPROVED: J. Lu REV NO: V.4 CHECKED: Joe Lee DATE: APR/21/2005 DRAWN: Y.W.WANG PAGE: 3 OF 3

www.Data5toerd91U.com