


SINGLE-PHASE BRIDGE RECTIFIER
VOLTAGE RANGE 50 to 1000 Volts
CURRENT 2.0 Ampere

FEATURES

- *Low cost
- *High forward surge current capability
- *Ideal for printed circuit board
- *High temperature soldering guaranteed:
260°C/10 second at 5 lbs. (2.3kg) tension

MECHANICAL DATA

- *Case: Transfer molded plastic
- *Epoxy: UL94V-O rate flame retardant
- *Terminals : Lead Solderable Per MIL-STD-202E method 208C
- *Polarity : As Marking on Body
- *Mounting Position: Any
- *Weight : 0.069 ounce, 1.95 gram

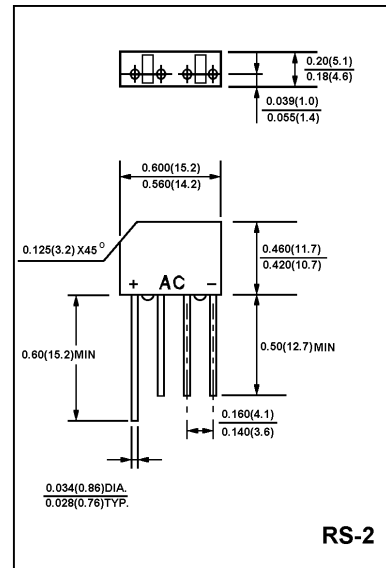

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- * Rating at 25°C ambient temperature unless otherwise specified
- * Single phase, half wave. 60Hz, resistive or inductive load.
- * For capacitive load derate current by 20 %

Characteristic	Symbol	KBP005	KBP01	KBP02	KBP04	KBP06	KBP08	KBP10	Unit
		RS201	RS202	RS203	RS204	RS205	RS206	RS207	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	200	400	600	800	1000	V
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	280	420	560	700	V
Average Rectifier Forward Current (Note 1) @ $T_A=50^\circ\text{C}$	$I_{O(AV)}$	2.0							A
Non-Repetitive Peak Surge Current 8.3 ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50							A
Forward Voltage (per element) ($I_F=2.0$ Amp)	V_{FM}	1.0							V
Peak Reverse Current (Rated DC Voltage, $T_C = 25^\circ\text{C}$) (Rated DC Voltage, $T_C = 100^\circ\text{C}$)	I_R	10 0.5							uA mA
Rating for Fusing($t<8.3$ ms)	I^2t	10							A ² s
Typical Junction Capacitance per element (Note2)	C_J	20							pF
Typical Thermal Resistance (note 3)	$R_{\theta JA}$	28							k/W
Operating and Storage Temperature Range	T_J, T_{stg}	-65 to +150							°C

- Note: 1 Lead maintained at ambient temperature at a distance of 9.5 mm from the case.
 2. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.
 3. Thermal resistance junction to ambient, mounted on PC board with 12 mm² copper pad.

KBP005/RS201 thru KBP10/RS207

FIG-1 FORWARD CURRENT DERATING CURVE

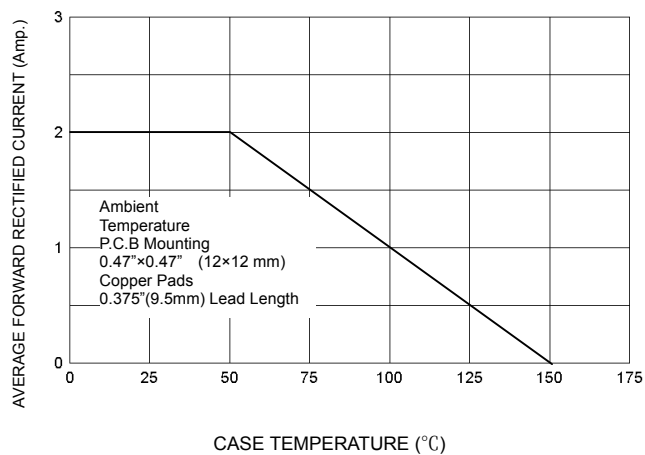


FIG-2 TYPICAL FORWARD CHARACTERISTICS

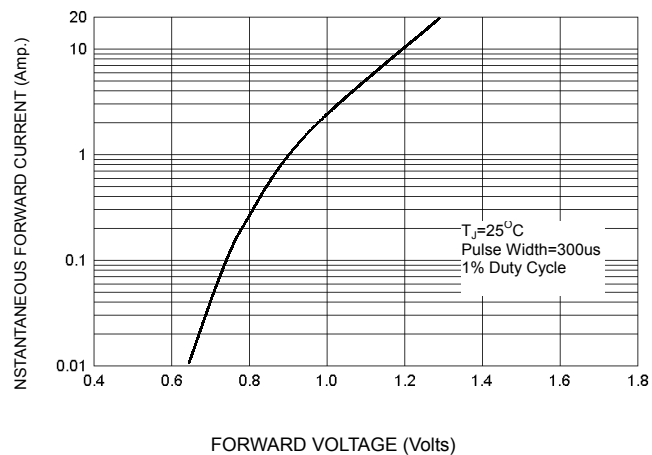


FIG-3 PEAK FORWARD SURGE CURRENT

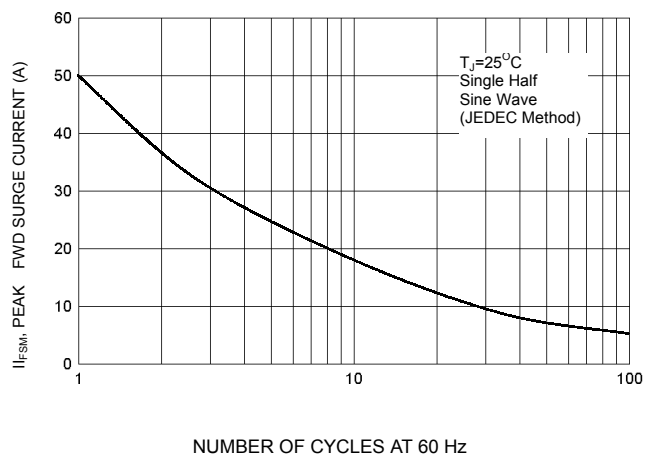


FIG-4 TYPICAL JUNCTION CAPACITANCE

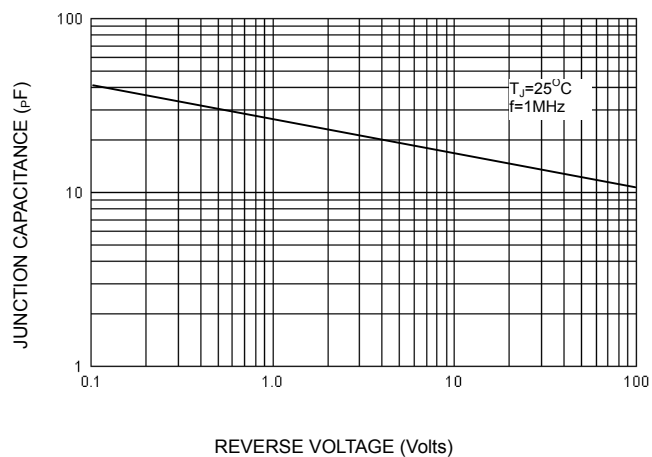


FIG-5 TYPICAL REVERSE CHARACTERISTICS

