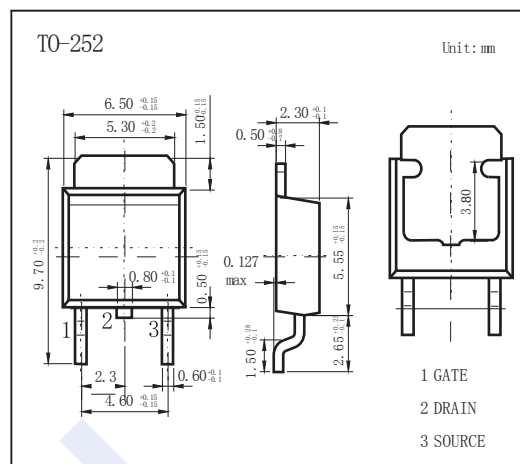



N-Channel Enhancement MOSFET

NDT4N65 (KDT4N65)

■ Features

- $V_{DS} (V) = 650V$
- $I_D = 4.0 A$ ($V_{GS} = 10V$)
- $R_{DS(ON)} < 3 \Omega$ ($V_{GS} = 10V$)

■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DS}	650	V
Gate-Source Voltage		V_{GS}	± 30	
Continuous Drain Current	$T_a = 25^\circ C$	I_D	4.0	A
	$T_a = 100^\circ C$		2.4	
Pulsed Drain Current (*a)		I_{DM}	12	
Avalanche Current (*a)		I_{AR}	4.5	
Power Dissipation	$T_a = 25^\circ C$	P_D	58	W
	Derate above $25^\circ C$		0.46	W/ $^\circ C$
Single Pulsed Avalanche Energy (*b)		EAS	210	mJ
Repetitive Avalanche Energy (*a)		EAR	5.8	
Peak Diode Recovery dv/dt (*c)		dv/dt	4.5	V/ns
Thermal Resistance.Junction- to-Ambient		R_{thJA}	110	$^\circ C/W$
Thermal Resistance.Junction- to-Case		R_{thJC}	2.16	
Thermal Resistance.Case-to-Sink Typ		R_{thJS}	50	
Maximum lead Temperature for soldering purpose, 1/8 from case for 5 seconds		TL	300	$^\circ C$
Junction Temperature		T_J	150	
Storage Temperature Range		T_{stg}	-55 to 150	

Notes:

a.Repetitive Rating :Pulse width limited by maximum junction temperature

b. $I_{AS}=4.5A, V_{DD}=50V, R_G=25\Omega$, Starting $T_J=25^\circ C$ c. $I_{SD} \leq 4.5A, di/dt \leq 200A/\mu s, V_{DD} \leq BV_{DSS}$, Starting $T_J=25^\circ C$

N-Channel Enhancement MOSFET

NDT4N65 (KDT4N65)

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	V _{DSS}	I _D =250 μA, V _{GS} =0V	650			V
Zero Gate Voltage Drain Current	I _{DSS}	V _D =650V, V _{GS} =0V			1	μA
		V _D =520V, V _{GS} =0V, Ta=125°C			10	
Gate-Body Leakage Current	I _{GSS}	V _D =0V, V _{GS} =±30V			±100	nA
Gate Threshold Voltage	V _{GS(th)}	V _D =V _{GS} , I _D =250 μA	2.0		4.0	V
Static Drain-Source On-Resistance	R _{DS(on)}	V _{GS} =10V, I _D =1.5A		2.5	3.0	Ω
Forward Transconductance	g _{FS}	V _D =40V, I _D =1.5A (*a)		4.7		S
Input Capacitance	C _{iss}	V _{GS} =0V, V _D =25V, f=1MHz		560		pF
Output Capacitance	C _{oss}			55		
Reverse Transfer Capacitance	C _{rss}			7		
Total Gate Charge	Q _g	V _{GS} =10V, V _D =480V, I _D =4.5A (*a/b)		16		nC
Gate Source Charge	Q _{gs}			2.5		
Gate Drain Charge	Q _{gd}			6.5		
Turn-On DelayTime	t _{d(on)}	I _D =4.5A, V _D =300V, R _{GEN} =25 Ω (*a/b)		10		ns
Turn-On Rise Time	t _r			40		
Turn-Off DelayTime	t _{d(off)}			40		
Turn-Off Fall Time	t _f			50		
Body Diode Reverse Recovery Time	t _{rr}	I _F = 4.5A, di/dt= 100A/μs V _{GS} =0V (*a)		300		nC
Body Diode Reverse Recovery Charge	Q _{rr}			2.0		
Maximum Body-Diode Continuous Current	I _S				4.0	A
Maximum Pulsed Drain-Source Current	I _{SM}				12	
Diode Forward Voltage	V _{SD}	I _S =4.0A, V _{GS} =0V			1.4	V

Notes:

a. Pulse Test: Pulse width ≤ 300 μs, Duty cycle ≤ 2%

b. Essentially independent of operating temperature

N-Channel Enhancement MOSFET

NDT4N65 (KDT4N65)

■ Typical Characteristics

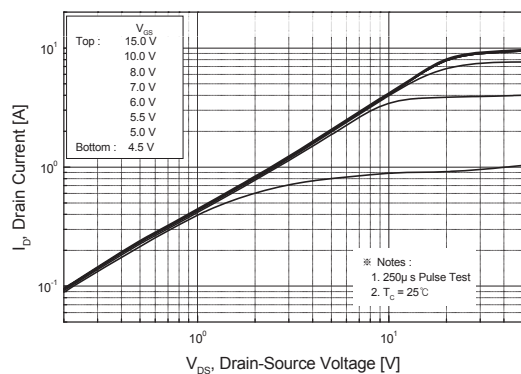


Figure 1. On-Region Characteristics

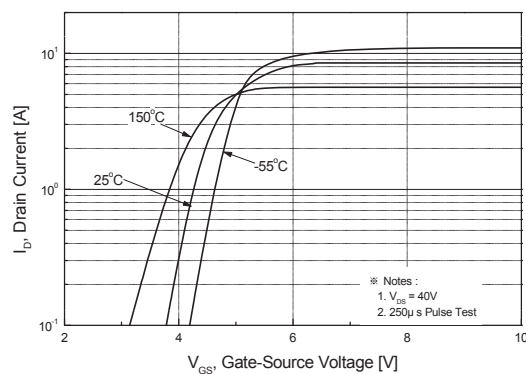


Figure 2. Transfer Characteristics

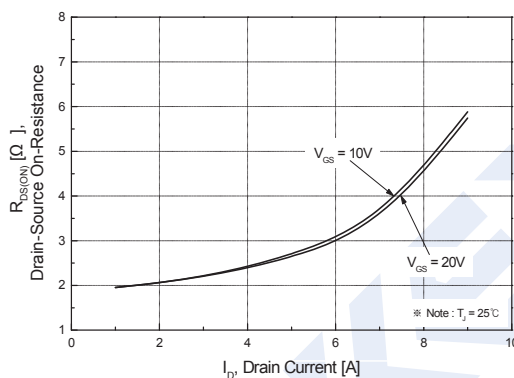


Figure 3. On-Resistance Variation vs Drain Current and Gate Voltage

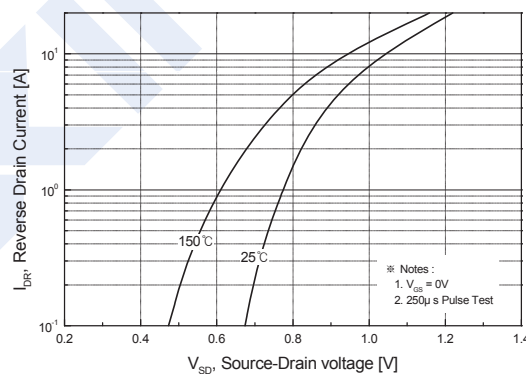


Figure 4. Body Diode Forward Voltage Variation with Source Current and Temperature

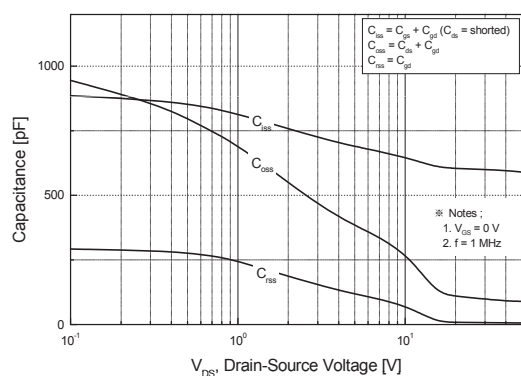


Figure 5. Capacitance Characteristics

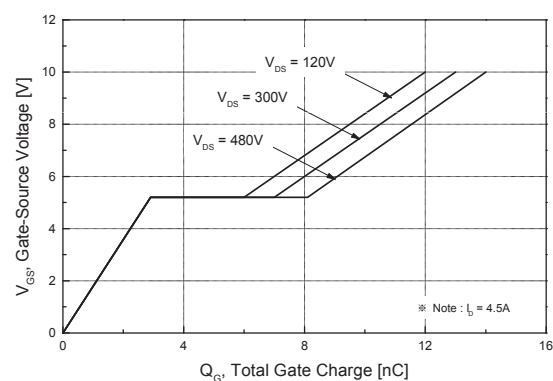


Figure 6. Gate Charge Characteristics

N-Channel Enhancement MOSFET

NDT4N65 (KDT4N65)

■ Typical Characteristics

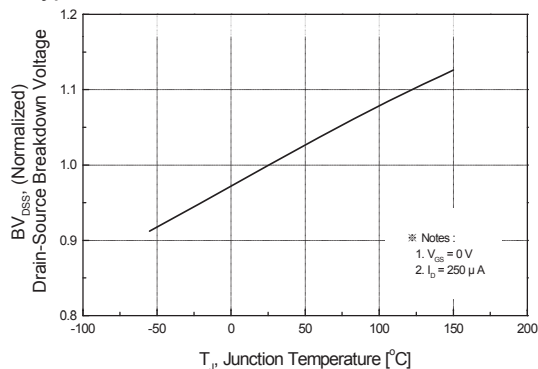


Figure 7. Breakdown Voltage Variation vs Temperature

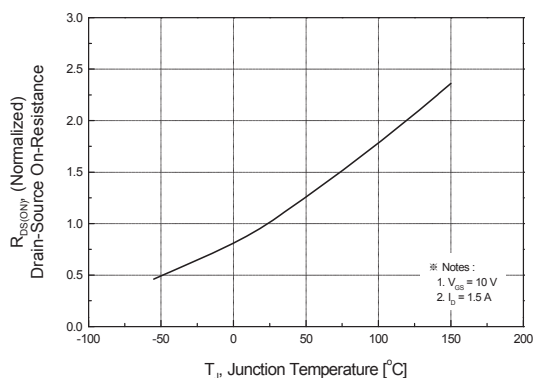


Figure 8. On-Resistance Variation vs Temperature

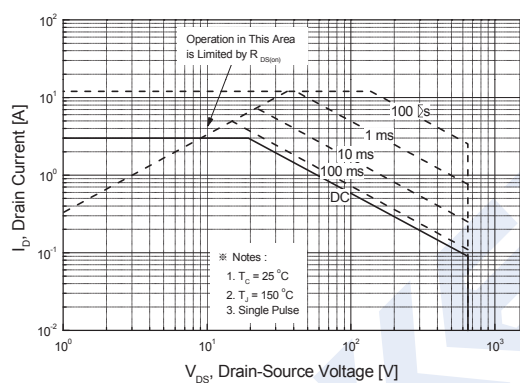


Figure 9. Maximum Safe Operating Area

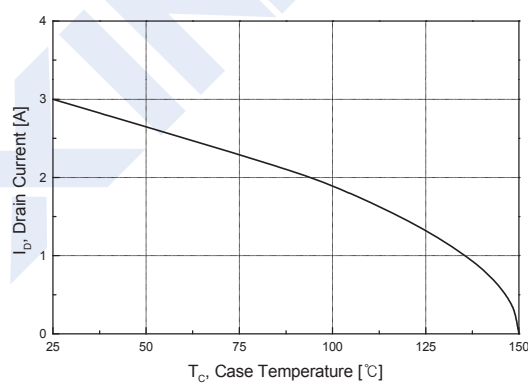


Figure 10. Maximum Drain Current vs Case Temperature

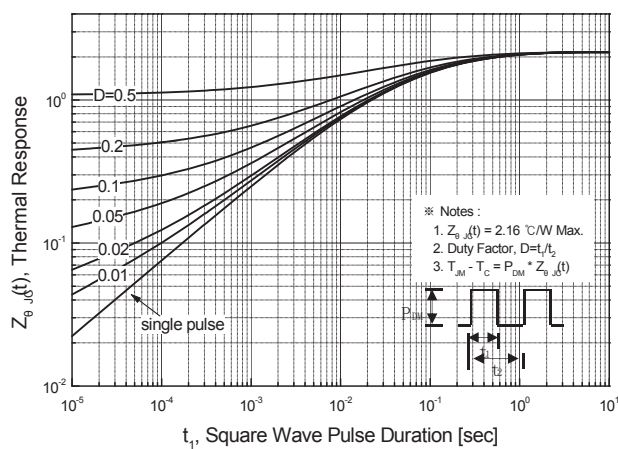


Figure 11. Transient Thermal Response Curve