

Compact low voltage thick film thermal printhead (8dots / mm)

KF2003-GF50A

A world first, ROHM offers the KF2003-GF50A of thermal printheads that allow operation using a single standard lithium ion battery: required voltage has been reduced to just 2.7V. Compact and lightweight they are ideal printheads for handheld printers and PDAs (personal digital assistants).


●Applications

Mobile printers
FET-POS printers
Hand-held printers
Debit printers

●Features

- 1) Using advanced LSI technology, ROHM has developed a dedicated low voltage driver chip. Compared with previous products, power consumption has been reduced by more than 30%. Because the print head circuits draw just 2.7 volts, the printer can be driven using a single lithium ion battery.
- 2) One rank resistance value of $123\Omega \pm 4\%$ eliminates the inconvenience of rank selection.
- 3) The GP10 series has a resistance value of 123Ω and can be used in devices designed to operate with a single 3V lithium ion battery.

●External dimensions (Units : mm)

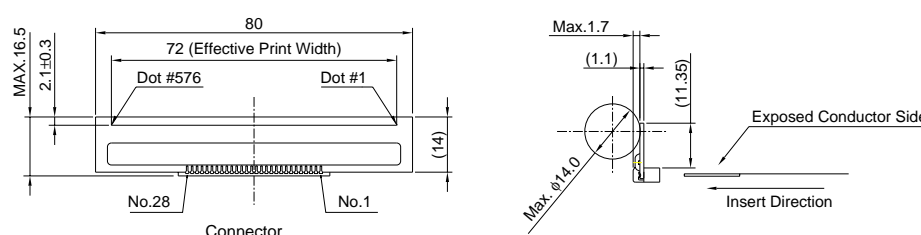

Printheads

●Equivalent circuit

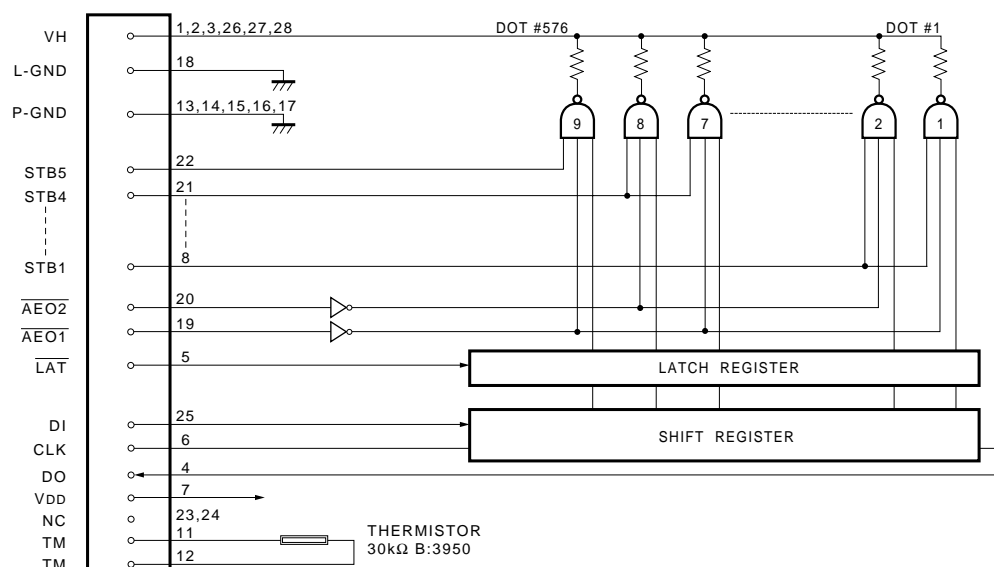


Fig.1

●Pin assignments

No.	Circuit	No.	Circuit
1	VH	15	P-GND
2	VH	16	P-GND
3	VH	17	P-GND
4	DO	18	L-GND
5	LAT	19	AEO1
6	CLK	20	AEO2
7	V _{DD}	21	STB4
8	STB1	22	STB5
9	STB2	23	NC
10	STB3	24	NC
11	TM	25	DI
12	TM	26	VH
13	P-GND	27	VH
14	P-GND	28	VH

L-GND : LOGIC GROUND
P-GND : POWER GROUND

Printheads

●Timing chart

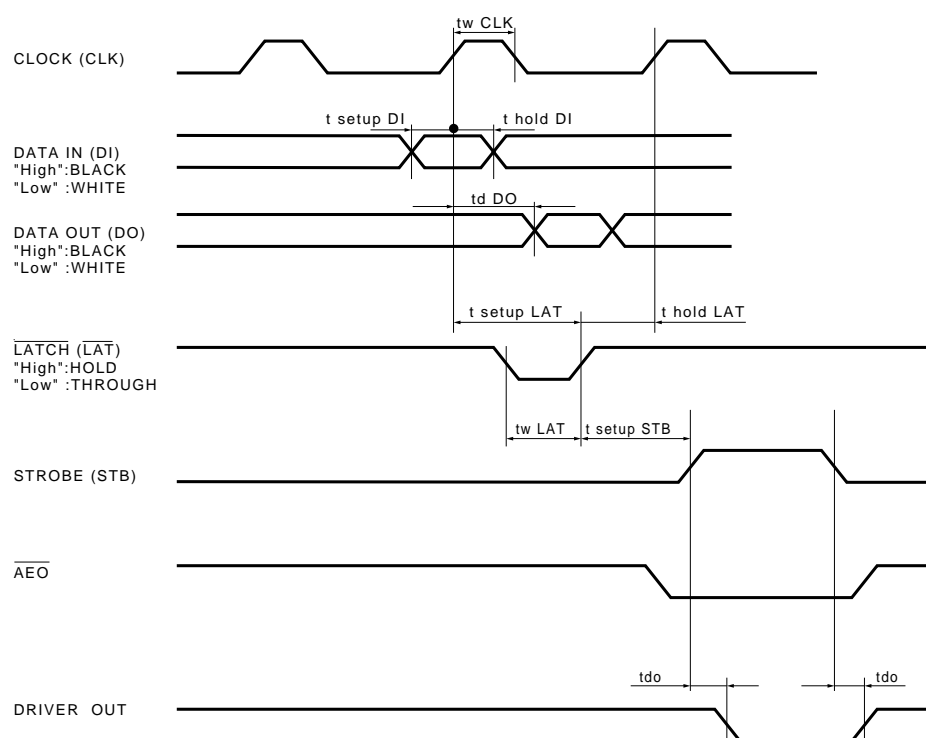


Fig.2

●Characteristics

Parameter	Symbol	Typical	Unit
Effective printing width	—	72	mm
Dot pitch	—	0.125	mm
Total dot number	—	576	dots
Average resistance value	Rave	123	Ω
Applied voltage	V _H	3.6	V
Applied power	P _O	0.07	W/dot
Print cycle	SLT	2.50	ms
Pulse width	T _{ON}	2.02	ms
Maximum number of dots energized simultaneously	—	64	dots
Maximum clock frequency	—	8	MHz
Maximum roller diameter	—	$\phi 14.0$	mm
Running life / pulse life	—	50/1 $\times 10^8$	km/pulses
Operating temperature	—	0~50	°C

Printheads

●Electrical characteristic curves

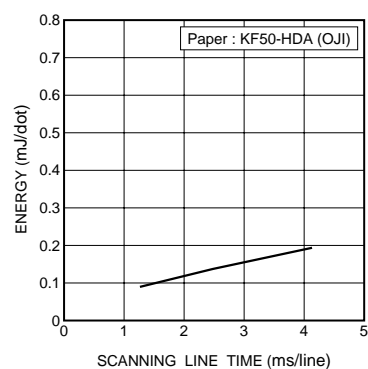


Fig.3 Adaptive speed chart

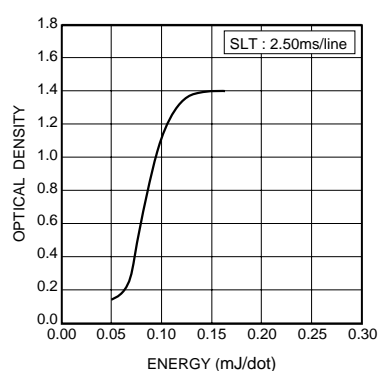


Fig.4 Representative density curve

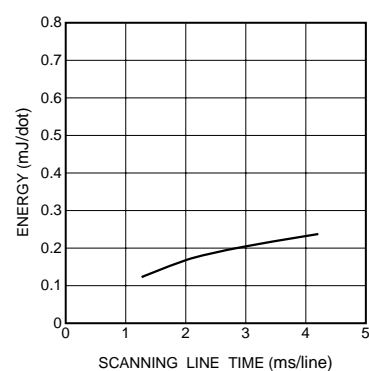


Fig.5 Maximum energy curve

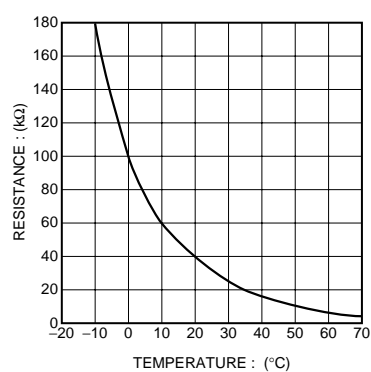


Fig.6 Thermistor curve

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.
Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.