


DUAL LOW NOISE OPERATIONAL AMPLIFIER




- Wide Band Decompensated ($A_v \geq 20\text{dB}$)
- Possible to Exchange the Position of Pin ⑨ for Pin ① Because of Pin Connection Being Symmetric. (KIA4559S Device Only)
- Pin ① and Pin ⑨ of lead frame was each other connected (KIA4559S Only).
- Wide Band Range : $f_T = 5\text{MHz}$ (Typ.)
- Suitable Application for Active Filter, Equalizer Amp. and Headphone Amp.

PIN CONNECTION (TOP VIEW)

KIA4559P, KIA4559F

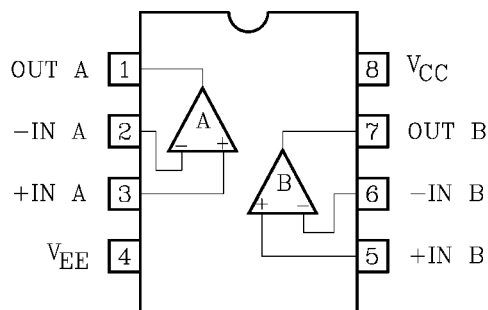


KIA4559S

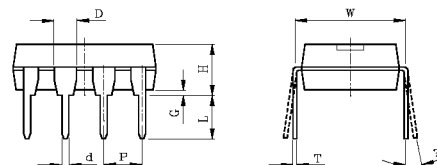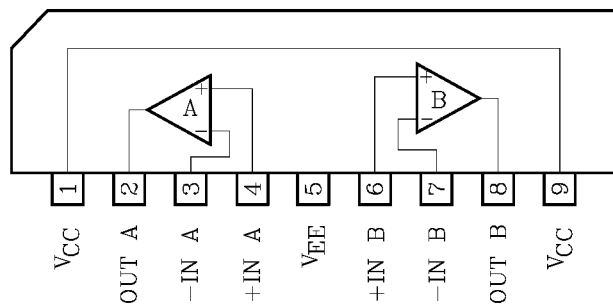



DIM	MILLIMETERS
A	9.6±0.2
B	6.45±0.2
D	1.52±0.1
d	0.46±0.1
G	0.50 MIN
H	3.8±0.3
L	3.3±0.3
P	2.54
T	0.25+0.1/-0.05
W	7.62
?	0 - 16°

DIP-8



DIM	MILLIMETERS
A	22.48±0.2
B	3.2±0.2
D	1.2±0.25
d	0.5±0.1
G	1.95±0.2
H	7.7±0.3
L	3.2±0.3
P	2.54
T	0.25+0.1/-0.05

SIP-9



DIM	MILLIMETERS
A	4.85±0.2
B1	3.94±0.2
B2	6.02±0.3
D	0.4±0.1
G	0.15+0.1/-0.05
H	1.83±0.2
L	0.65±0.2
P	1.27
T	0.20+0.1/-0.05


FLP-8

KIA4559P/S/F

MAXIMUM RATINGS (Ta=25℃)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Supply Voltage		V_{CC} V_{EE}	36, +18 or 0, -18	V
Differential Input Voltage		D_{VIN}	± 30	V
Input Voltage		V_{IN}	$V_{CC} \sim V_{EE}$	V
Power Dissipation	KIA4559P	P_D	500	mW
	KIA4559S			
	KIA4559F		240	
Operating Temperature		T_{opr}	-40~85	℃
Storage Temperature		T_{stg}	-55~125	℃
Pin ① to Pin ⑨ Maximum Current	KIA4559S	I_{max}	1	A

EQUIVALENT CIRCUIT

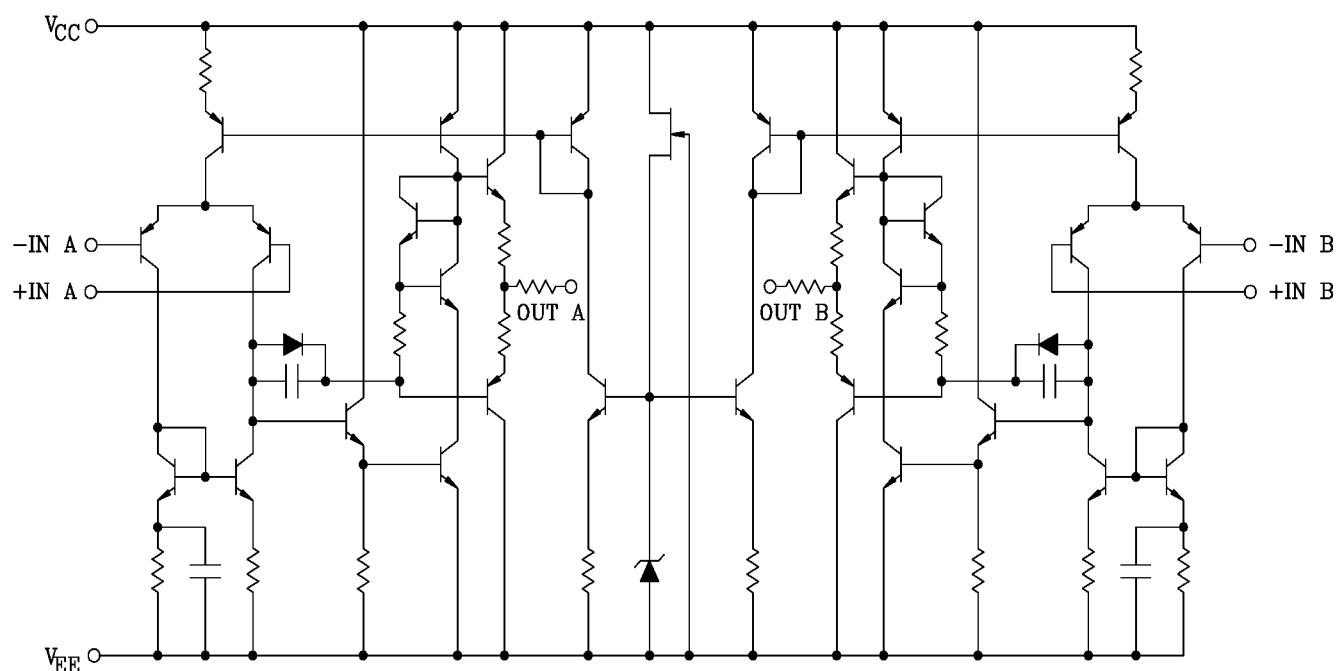

KIA4559P/S/F

ELECTRICAL CHARACTERISTICS ($V_{CC}=15V$, $V_{EE}=-15V$, $T_a=25^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V_{IO}	-	$R_g \leq 10k\Omega$	-	0.5	6	mV
Input Offset Current	I_{IO}	-	-	-	5	200	nA
Input Bias Current	I_I	-	-	-	60	500	nA
Common Mode Input Voltage	CMV_{IN}	-	-	± 12	± 14	-	V
Maximum Output Voltage	V_{OM}	-	$R_{L1}=10k\Omega$	± 12	± 14	-	V
	V_{OMR}		$R_{L1}=2k\Omega$	± 10	± 13	-	
Source Current	I_{source}	-	-	-	40	-	mA
Sink Current	I_{sink}	-	-	-	40	-	mA
Voltage Gain (Open Loop)	G_V	-	$V_{OUT}=\pm 10V$, $R_{L1}=2k\Omega$	86	100	-	dB
Common Mode Input Signal Rejection Ratio	CMRR	-	$R_g \leq 10k\Omega$	70	90	-	dB
Supply Voltage Rejection Ratio	SVRR	-	$R_g \leq 10k\Omega$	-	30	150	$\mu V/V$
Slew Rate	SR	-	$G_V=1$, $R_L=2k\Omega$	-	2.0	-	V/ μS
Unity Gain Cross Frequency	f_T	-	Open Loop	-	5.0	-	MHz
Supply Current	I_{CC} , I_{EE}	-	-	-	4.0	6.0	mA
Equivalent Input Noise Voltage	V_{NI}	-	$R_S=1k\Omega$, $f=30Hz \sim 30kHz$	-	2.5	-	μV_{rms}

