


KPT-2410 series Piezo Transducer

FREQUENCY RESPONSE

[actual curve of type]

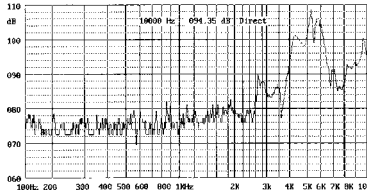

applied voltage: 12Vp-p, 1/2 duty, square wave distance for measurement: 10cm

Model No


KPT-2410

Rated Voltage	12Vp-p Square Wave
Max. Allowable Voltage	30Vp-p Square Wave
Max. Rated Current	4mA at 4.0KHz/12Vp-p Square Wave
Min. Sound Pressure Level	85dB at 4.0KHz/12Vp-p Square Wave/10cm
Resonant Frequency	4.0±0.5KHz
Operating Temperature	-20~+60jæ
Weight	3.5g



color Black
ABS Housing Material
Pin Terminal

DIMENSIONS

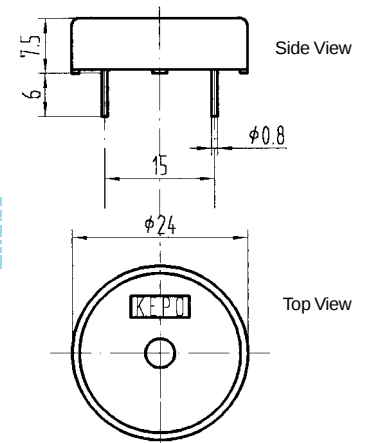


all dimensions are in mm

* Value applying at rated voltage

KPT-2420 series Piezo Transducer

FREQUENCY RESPONSE

[actual curve of type]

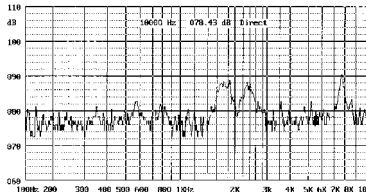


applied voltage: 12Vp-p, 1/2 duty, square wave distance for measurement: 30cm

Model No


KPT-2420

Rated Voltage	12Vp-p Square Wave
Max. Allowable Voltage	30Vp-p Square Wave
Max. Rated Current	4mA at 2.4KHz/12Vp-p Square Wave
Min. Sound Pressure Level	83dB at 2.4KHz/12Vp-p Square Wave/30cm
Resonant Frequency	2.4±0.5KHz
Operating Temperature	-20~+60jæ
Weight	4g



color Black
ABS Housing Material
Pin Terminal

DIMENSIONS

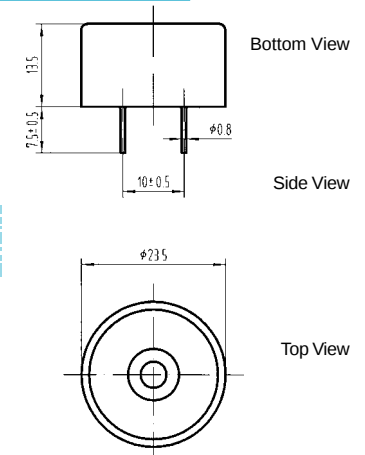


all dimensions are in mm

* Value applying at rated voltage

KPT-2421G series Piezo Transducer

FREQUENCY RESPONSE

[actual curve of type]

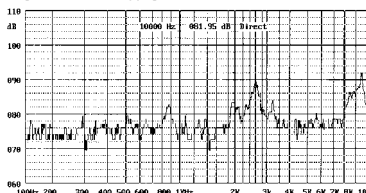


applied voltage: 12Vp-p, 1/2 duty, square wave distance for measurement: 30cm

Model No


KPT-2421G

Rated Voltage	12Vp-p Square Wave
Max. Allowable Voltage	30Vp-p Square Wave
Max. Rated Current	3.5mA at 2.5KHz/12Vp-p Square Wave
Min. Sound Pressure Level	78dB at 2.5KHz/12Vp-p Square Wave/30cm
Resonant Frequency	2.5±0.5KHz
Operating Temperature	-20~+60jæ
Weight	3g



color Black
PA66Housing Material
Pin Terminal

DIMENSIONS

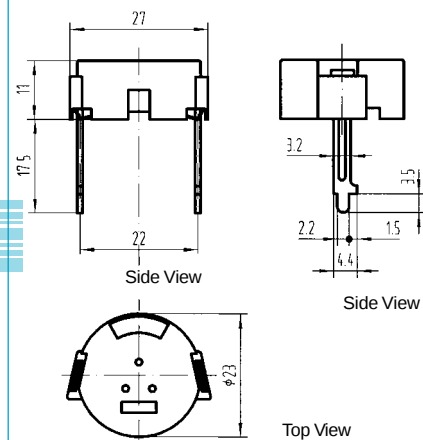

all dimensions are in mm

* Value applying at rated voltage