
PRODUCT SPECIFICATION

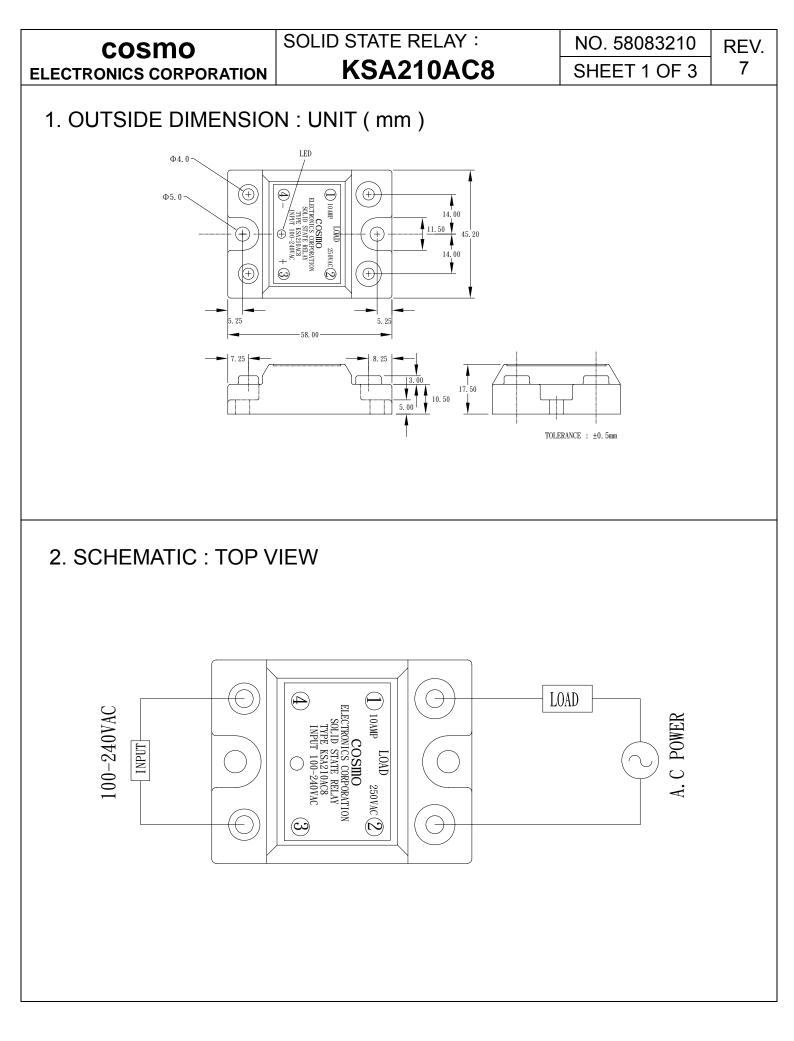

PRODUCT SPECIFICATION

cosmo		SOLID STATE RELAY :			NO. 5808321			10 REV		
LECTRONICS CORPORATION		KSA210AC8			C8	SHEET 2 O		OF 3	7	
3.Abs	olute Maximum Ra	atings						(Ta=25℃)	
Parameter					Symbol	F	Rating		Unit	
Input	Input signal voltage				V _{IN}	√ _{IN} 100~240			VAC	
	Drop-out voltage				V_{do}		10		VAC	
Output	RMS on-state current				Ι _Τ		10		Arms	
	Peak one cycle surge current (8.3ms)			I _{surge}		100		А		
	Repetitive peak-off state voltage			V _{DRM}		600		V		
	Operating frequency			f		47~70		Hz		
	Critical rate of rise of on-state current			di/dt		50		A/us		
	Load supply voltage				V _{out}		250		Vrms AC	
Isolation voltage input to output			t		V _{iso}	4000			Vrms	
Operating temperature				T _{opr}		-:	-30~100		°C	
Storage temperature				T _{stg}		-30~125			°C	
Soldering temperature 10 sec				T _{sol}		300			°C	
4.Electrical Characteristics								(Ta	a=25℃)	
Parameter			Symbol	Conditions		MIN	TYP	MAX	Unit	
Input	Pick-up voltage	<-up voltage		$Rin=11K\Omega$				100	VAC	
	Input current		Rin				11		ΚΩ	
Output	On-state voltage		VT	I _T =1Arms				1.5	Vrms	
	Operating current		I _{op}	Vout=240Vrms		50			mArm	
	Leakage current		I _{leak}	Vout=240Vrms			3.5	8	mArm	
	Critical rate of rise of		dv/dt			100			V/us	
	off-state voltage									
	Zero-cross voltage		V _{ox}				YES			
	Load Voltage Rating		V _{out}	I _⊤ =5	OmArms MIN	50		280	VAC	
Minimum trigger current			I _{FT}	V _{DRM} =600V				25	mA	
Isolation resistance input to output		R _{ISO}	DC500V		10			GΩ		
Turn-on time		T _{on}	60Hz AC				8.3	mS		
Turn-off time		T _{off}	(60Hz AC			8.3	mS		
Thermal resistance		R _{th}								
(between junction and case)			(j-c)l				2.5		°C/W	

PRODUCT SPECIFICATION

COSMO ELECTRONICS CORPORATION

SOLID STATE RELAY : KSA210AC8

NO. 58083210 SHEET 3 OF 3

Application Notice

The statements regarding the suitability of products for certain types of applications are based on cosmo's knowledge of general applications of cosmo products. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to verify the specifications are suitable for use in a particular application. Customers are solely responsible for all aspects of their own product design or applications. The parameters provided in the datasheet may vary in different applications and performance may vary over time. All operating parameters (including typical parameters) must be validated by customer's technical experts for different applications. cosmo assumes no liability for customer' product design or applications. Product specifications do not expand or otherwise change cosmo's terms and conditions of purchase, including but not limited to the warranty expressed therein.

When using cosmo products, please comply with safety standards and instructions. cosmo has no liability and responsibility to the damage caused by improper use of the instructions specified in the specifications.

cosmo products are designed for use in general electronic equipment such as telecommunications, office automation equipments, personal computers, test and measurement equipments, consumer electronics, industrial control, instrumentation, audio, video.

cosmo devices shall not be used in equipment that requires higher level of reliability and safety, such as nuclear power control equipment, telecommunication equipment(trunk lines), space application, medical and other life supporting equipments, and equipment for aircraft, military, automotive or any other application that can cause human injury or death.

cosmo reserves the right to change the specifications, data, characteristics, structure, materials and other contents at any time without notice. Please contact cosmo to obtain the latest specification.

cosmo disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.