

isc Silicon NPN Power Transistor

KSC5022

DESCRIPTION



- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = 500V(\text{Min})$
- High Switching Speed
- Wide Area of Safe Operation

APPLICATIONS

- Switching regulators
- General purpose power amplifiers

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	800	V
V_{CEO}	Collector-Emitter Voltage	500	V
V_{EBO}	Emitter-Base voltage	7	V
I_C	Collector Current-Continuous	4	A
I_{CM}	Collector Current-Peak	8	A
I_B	Base Current-Continuous	1.5	A
P_C	Collector Power Dissipation @ $T_c=25^{\circ}\text{C}$	60	W
T_J	Junction Temperature	150	$^{\circ}\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^{\circ}\text{C}$

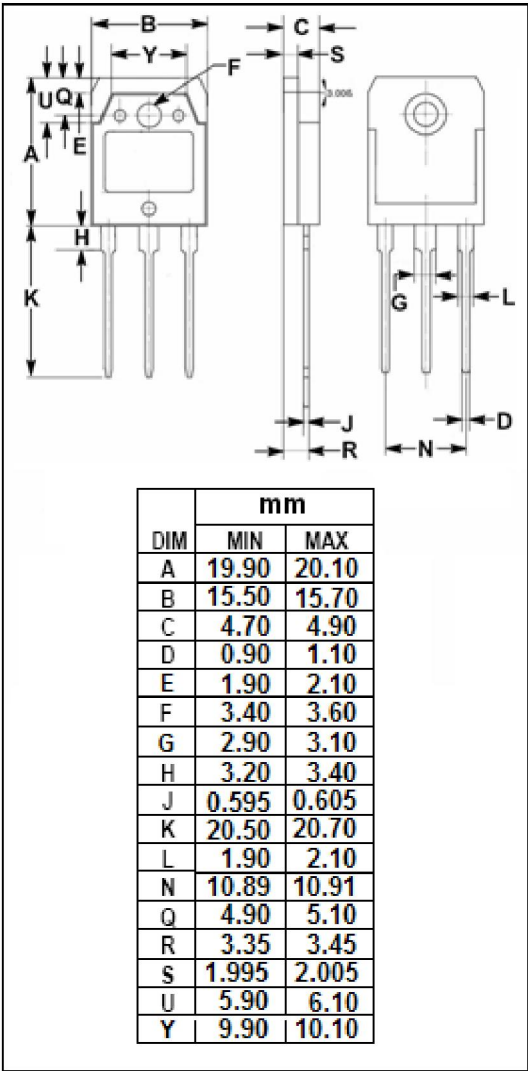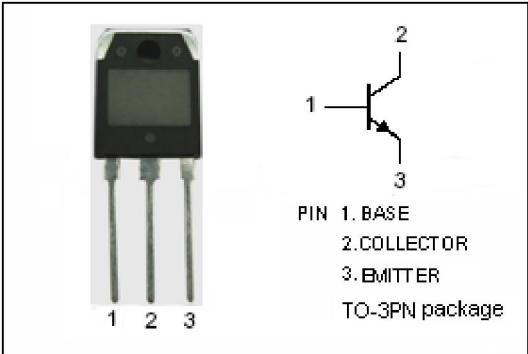

isc Silicon NPN Power Transistor

KSC5022

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEX(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=1.5\text{A}$; $I_{B1}=-I_{B2}=0.6\text{A}$, $L=1\text{mH}$; Clamped	500			V
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=5\text{mA}$; $R_{BE}=\infty$	500			V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	$I_C=1\text{mA}$; $I_E=0$	800			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E=1\text{mA}$; $I_C=0$	7			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=1.5\text{A}$; $I_B=0.3\text{A}$			1.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=1.5\text{A}$; $I_B=0.3\text{A}$			1.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB}=500\text{V}$; $I_E=0$			10	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=5\text{V}$; $I_C=0$			10	μA
h_{FE-1}	DC Current Gain	$I_C=0.3\text{A}$; $V_{CE}=5\text{V}$	15		50	
h_{FE-2}	DC Current Gain	$I_C=1.5\text{A}$; $V_{CE}=5\text{V}$	8			
f_T	Current-Gain—Bandwidth Product	$I_C=0.3\text{A}$; $V_{CE}=10\text{V}$		18		MHz
C_{OB}	Output Capacitance	$I_E=0$; $V_{CB}=10\text{V}$; $f_{test}=1.0\text{MHz}$		50		pF

Switching times

t_{on}	Turn-on Time	$I_C=2\text{A}$, $I_{B1}=0.4\text{A}$; $I_{B2}=-0.8\text{A}$ $R_L=100\Omega$; $V_{CC}=200\text{V}$			0.5	μs
t_{stg}	Storage Time				3.0	μs
t_f	Fall Time				0.3	μs

◆ h_{FE-1} Classifications

R	O	Y
15-30	20-40	30-50