

Frequency Synthesizer

KSN-2346A+

50Ω 2286 to 2346 MHz

The Big Deal

- Low phase noise and spurious
- Robust design and construction
- Small size 0.80" x 0.58" x 0.15"



CASE STYLE: DK801

Product Overview

The KSN-2346A+ is a Frequency Synthesizer, designed to operate from 2286 to 2346 MHz for LTE base station application. The KSN-2346A+ is packaged in a metal case (size of 0.80" x 0.58" x 0.15") to shield against unwanted signals and noise.

Key Features

Feature	Advantages
Low phase noise and spurious: <ul style="list-style-type: none">• Phase Noise: -88 dBc/Hz typ. @ 10 kHz offset• Comparison Spurious: -92 dBc typ.• Reference Spurious: -106 dBc typ.	Low phase noise and spurious improve system EVM (Error Vector Magnitude).
Robust design and construction	To enhance the robustness of KSN-2346A+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.
Small size, 0.80" x 0.58" x 0.15"	The small size enables the KSN-2346A+ to be used in compact designs.



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

50Ω 2286 to 2346 MHz

Features

- Integrated VCO + PLL
- Low phase noise and spurious
- Robust design and construction
- Low operating voltage (VCC VCO=+5V, VCC PLL=+5V)
- Small size 0.80" x 0.58" x 0.15"



CASE STYLE: DK801

PRICE: \$29.95 ea. QTY (1-9)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS
Compliance. See our web site for RoHS Compliance
methodologies and qualifications.

Applications

- LTE base station

General Description

The KSN-2346A+ is a Frequency Synthesizer, designed to operate from 2286 to 2346 MHz for LTE base station application. The KSN-2346A+ is packaged in a metal case (size of 0.80" x 0.58" x 0.15") to shield against unwanted signals and noise. To enhance the robustness of KSN-2346A+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.

Simplified Schematic



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.



REV. OR
M128015
EDR-9640/2F1
KSN-2346A+
Category-A1
RAV
100701
Page 2 of 10

Electrical Specifications (over operating temperature -40°C to +85°C)

Parameters		Test Conditions	Min.	Typ.	Max.	Units
Frequency Range		-	2286	-	2346	MHz
Step Size		-	-	1000	-	kHz
Settling Time		Within ± 1 kHz	-	1.1	-	mSec
Output Power		-	-2.5	-0.3	+2.5	dBm
SSB Phase Noise		@ 100 Hz offset	-	-83	-	dBc/Hz
		@ 1 kHz offset	-	-86	-80	
		@ 10 kHz offset	-	-88	-83	
		@ 100 kHz offset	-	-122	-116	
		@ 1 MHz offset	-	-143	-137	
Integrated SSB Phase Noise		@100 Hz to 1MHz	-	-45	-	dBc
Reference Spurious Suppression		Ref. Freq. 15 MHz	-	-106	-80	dBc
Comparison Spurious Suppression		Step Size 1000 kHz	-	-92	-70	
Non - Harmonic Spurious Suppression		-	-	-90	-	
Harmonic Suppression		-	-	-30	-20	
VCO Supply Voltage		5.00	+4.75	5.00	+5.25	V
PLL Supply Voltage		5.00	+4.75	5.00	+5.25	
VCO Supply Current		-	-	24	30	mA
PLL Supply Current		-	-	13	20	
Reference Input (External)	Frequency	15 (square wave)	-	15	-	MHz
	Amplitude	1.0	0.8	1.0	1.2	V _{P-P}
	Input impedance	-	-	100	-	K Ω
	Phase Noise @ 1 kHz offset	-	-	-145	-	dBc/Hz
RF Output port Impedance		-	-	50	-	Ω
Input Logic Level	Input high voltage	-	4.20	-	-	V
	Input low voltage	-	-	-	0.95	V
Digital Lock Detect	Locked	-	4.35	-	5.65	V
	Unlocked	-	-	-	0.40	V
Frequency Synthesizer PLL		-	ADF4113			
PLL Programming		-	3-wire serial 5V CMOS			
Register Map @ 2346 MHz	F_Register	-	(MSB) 10111111000000010010010 (LSB)			
	N_Register	-	(MSB) 1000001001001000101001 (LSB)			
	R_Register	-	(MSB) 100000000000000111100 (LSB)			

Absolute Maximum Ratings

Parameters	Ratings
VCO Supply Voltage	6V
PLL Supply Voltage	6V
VCO Supply Voltage to PLL Supply Voltage	-0.3V to +5.5V
Reference Frequency Voltage	-0.3Vmin, VCC PLL +0.3Vmax
Data, Clock, LE Levels	-0.3Vmin, VCC PLL +0.3Vmax
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

Permanent damage may occur if any of these limits are exceeded



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Typical Performance Data

FREQUENCY (MHz)	POWER OUTPUT			VCO CURRENT			PLL CURENT		
	(dBm)			(mA)			(mA)		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
2286	-0.15	-0.13	-0.15	23.07	24.25	25.03	9.95	12.41	14.51
2295	-0.20	-0.23	-0.19	23.05	24.23	25.01	9.91	12.36	14.46
2310	-0.21	-0.17	-0.22	23.03	24.22	24.99	9.92	12.37	14.46
2325	-0.22	-0.18	-0.29	22.98	24.19	24.95	9.92	12.38	14.48
2340	-0.30	-0.27	-0.34	22.90	24.12	24.89	9.93	12.39	14.49
2346	-0.31	-0.29	-0.36	22.88	24.10	24.85	9.99	12.44	14.55

FREQUENCY (MHz)	HARMONICS (dBc)					
	F2			F3		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
2286	-33.48	-31.72	-31.73	-45.15	-48.70	-48.58
2295	-34.25	-31.16	-31.52	-46.84	-48.67	-49.75
2310	-31.85	-30.05	-29.50	-49.01	-52.38	-52.30
2325	-29.78	-28.86	-29.48	-54.42	-53.66	-52.29
2340	-26.90	-26.61	-27.98	-55.95	-56.06	-52.78
2346	-26.09	-25.72	-27.63	-58.88	-57.31	-53.86

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @OFFSETS				
	+25°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
2286	-84.86	-87.03	-89.47	-122.84	-144.68
2295	-86.32	-87.87	-88.79	-122.63	-144.35
2310	-85.86	-86.30	-89.14	-122.68	-144.49
2325	-85.16	-85.90	-87.49	-122.08	-144.19
2340	-83.48	-86.43	-86.47	-121.51	-143.89
2346	-85.59	-85.28	-87.00	-121.55	-143.72

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @OFFSETS				
	-45°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
2286	-83.57	-84.00	-88.50	-124.23	-146.82
2295	-84.94	-86.57	-89.33	-123.73	-146.44
2310	-81.73	-86.14	-88.41	-123.26	-146.28
2325	-82.31	-86.59	-88.51	-123.14	-145.80
2340	-84.14	-86.28	-88.06	-122.40	-145.12
2346	-83.06	-85.24	-86.87	-122.34	-145.13

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @OFFSETS				
	+85°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
2286	-82.95	-88.05	-88.16	-121.17	-142.81
2295	-81.91	-85.95	-87.68	-120.91	-142.72
2310	-81.37	-85.13	-87.07	-120.76	-142.80
2325	-85.12	-84.89	-86.39	-120.39	-142.07
2340	-81.99	-86.33	-86.65	-120.18	-142.08
2346	-83.98	-86.34	-86.72	-119.99	-141.32



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

COMPARISON SPURIOUS ORDER	COMPARISON SPURIOUS @ Fcarrier 2286MHz+(n*Freference) (dBc) note 1			COMPARISON SPURIOUS @ Fcarrier 2316MHz+(n*Freference) (dBc) note 1			COMPARISON SPURIOUS @ Fcarrier 2346MHz+(n*Freference) (dBc) note 1		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
n									
-5	-123.87	-110.95	-102.84	-103.40	-114.80	-114.22	-101.62	-109.45	-103.02
-4	-107.19	-103.79	-102.93	-108.95	-115.60	-103.42	-104.85	-111.60	-102.05
-3	-104.94	-101.32	-100.61	-106.71	-118.82	-102.27	-103.17	-107.74	-101.18
-2	-96.60	-98.32	-95.78	-107.04	-111.53	-96.02	-106.72	-108.16	-94.86
-1	-90.49	-92.26	-91.26	-100.77	-104.97	-89.76	-99.00	-102.58	-89.41
0 ^{note 2}	-	-	-	-	-	-	-	-	-
+1	-88.83	-92.62	-90.66	-96.43	-99.88	-89.54	-94.43	-98.82	-88.76
+2	-95.34	-97.79	-95.01	-100.90	-104.68	-94.78	-104.13	-109.22	-93.51
+3	-99.87	-101.07	-100.85	-102.12	-116.50	-100.96	-107.67	-107.94	-99.74
+4	-105.26	-104.65	-104.33	-106.85	-117.19	-102.66	-107.22	-112.01	-100.31
+5	-107.88	-105.48	-103.18	-104.68	-106.32	-108.57	-101.22	-113.46	-104.21

Note 1: Comparison frequency 1000 kHz

Note 2: All spurs are referenced to carrier signal (n=0).

REFERENCE SPURIOUS ORDER	REFERENCE SPURIOUS @ Fcarrier 2286MHz+(n*Freference) (dBc) note 3			REFERENCE SPURIOUS @ Fcarrier 2316MHz+(n*Freference) (dBc) note 3			REFERENCE SPURIOUS @ Fcarrier 2346MHz+(n*Freference) (dBc) note 3		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
n									
-5	-115.10	-126.60	-116.04	-117.31	-114.85	-119.26	-116.91	-117.03	-119.52
-4	-116.83	-123.42	-117.54	-120.37	-118.83	-116.87	-120.32	-116.24	-124.91
-3	-115.57	-122.81	-115.09	-119.28	-117.07	-115.10	-115.94	-114.59	-117.35
-2	-111.77	-113.45	-113.50	-112.72	-112.98	-118.55	-110.09	-113.67	-118.43
-1	-109.04	-108.01	-113.27	-109.38	-117.43	-117.04	-98.95	-106.22	-112.71
0 ^{note 4}	-	-	-	-	-	-	-	-	-
+1	-106.52	-106.39	-114.45	-112.11	-120.00	-122.20	-106.69	-112.16	-116.50
+2	-110.48	-111.83	-117.44	-112.53	-119.86	-116.72	-109.84	-112.19	-117.96
+3	-116.78	-117.87	-116.02	-116.56	-116.24	-117.86	-113.59	-113.02	-113.79
+4	-117.88	-123.24	-121.64	-122.15	-123.29	-116.84	-118.74	-116.43	-118.53
+5	-117.56	-123.72	-118.34	-116.34	-117.79	-117.49	-115.40	-114.86	-117.56

Note 3: Reference frequency 15 MHz

Note 4: All spurs are referenced to carrier signal (n=0).



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661






For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Typical Performance Curves

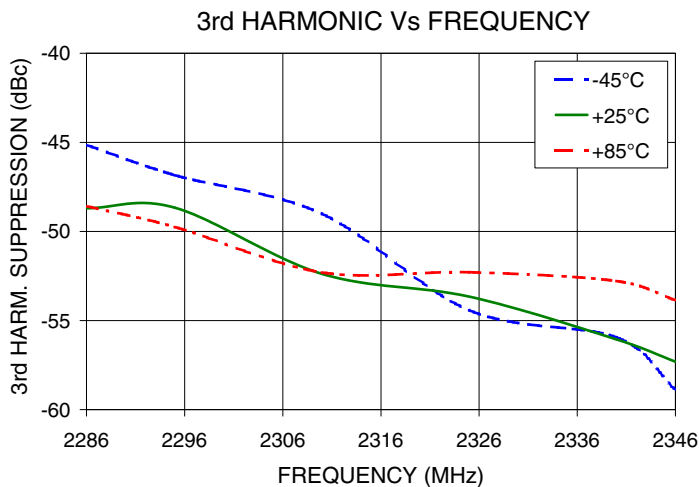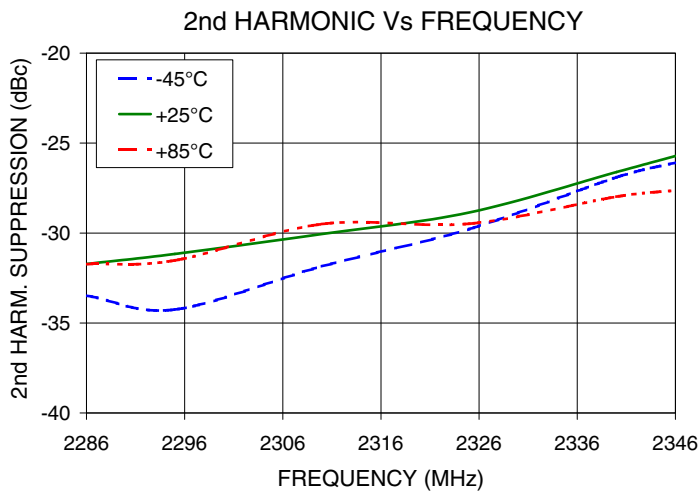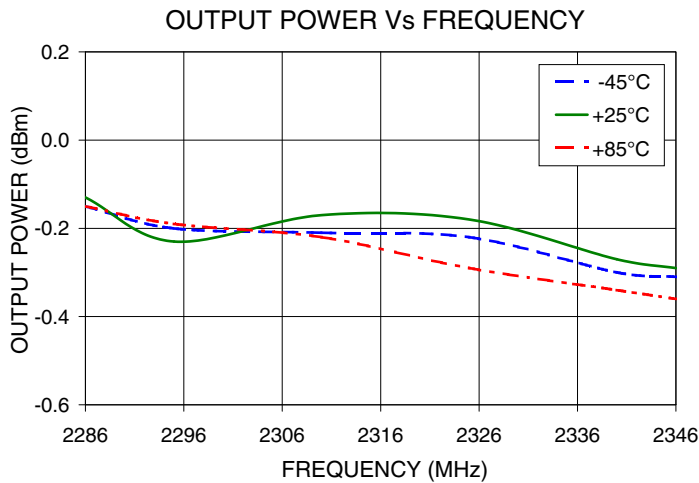






IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

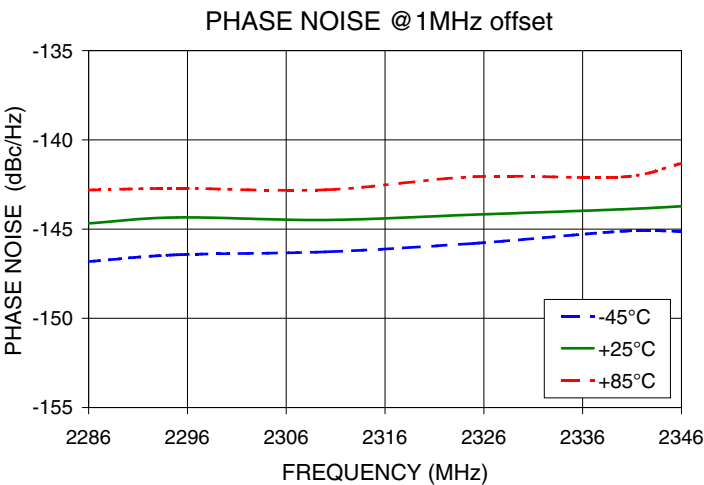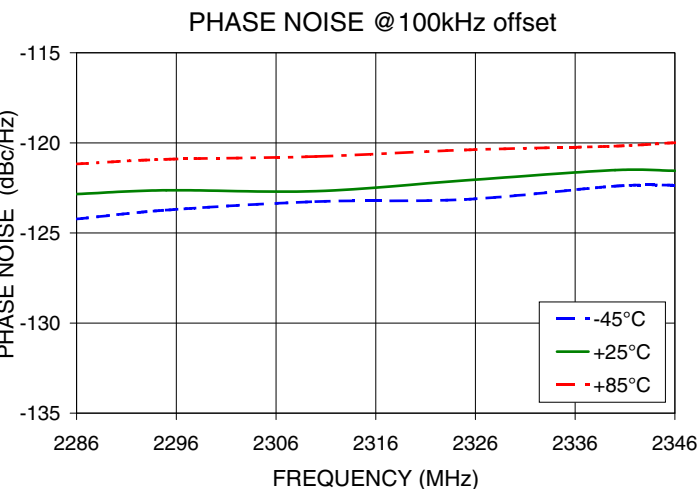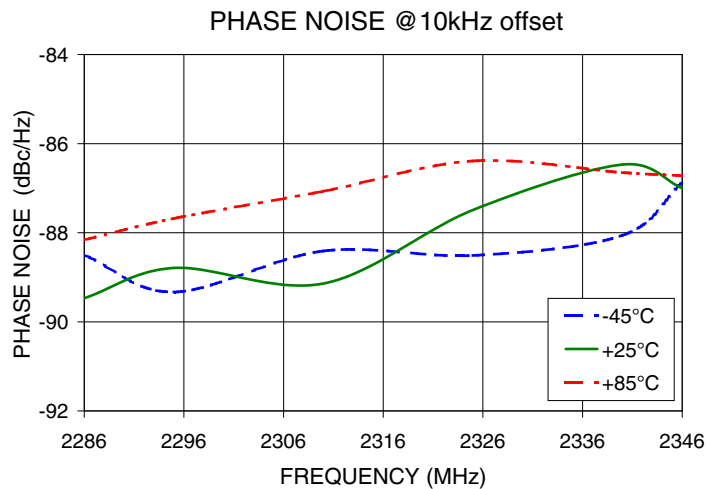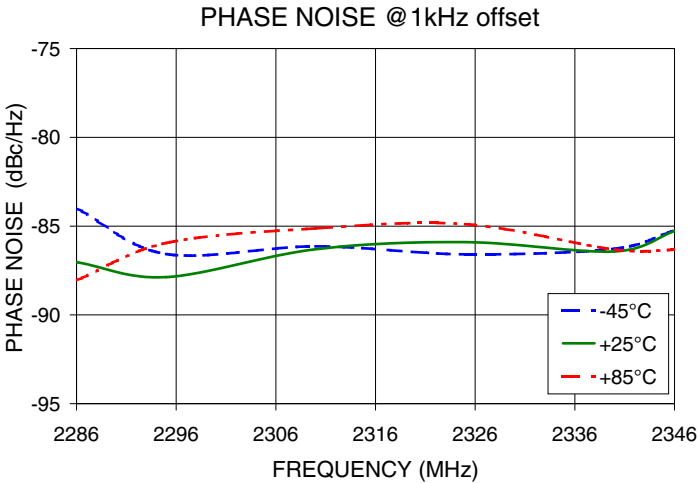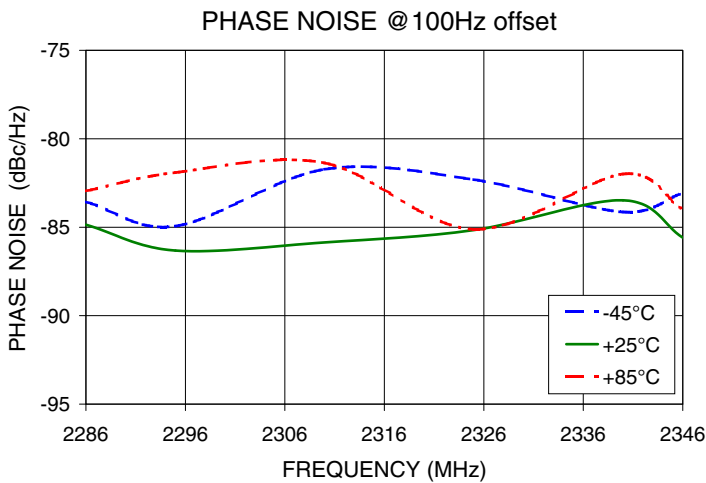

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.


COMPARISON SPURIOUS
Vs FREQ. OFFSET @ Fcar = 2286MHz

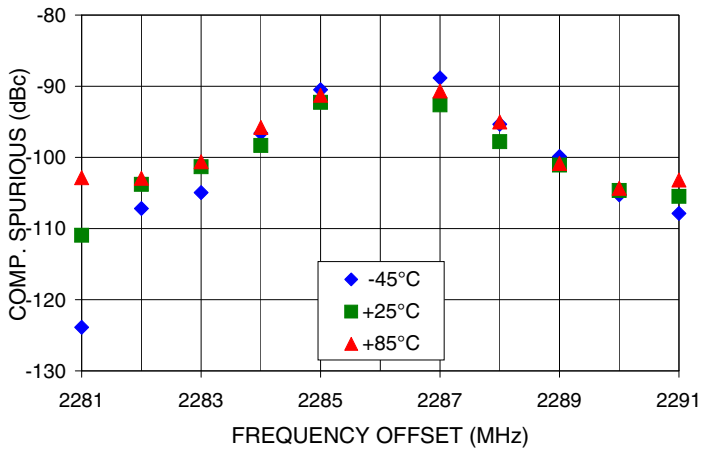


REFERENCE SPURIOUS
Vs FREQ. OFFSET @ Fcar = 2286MHz

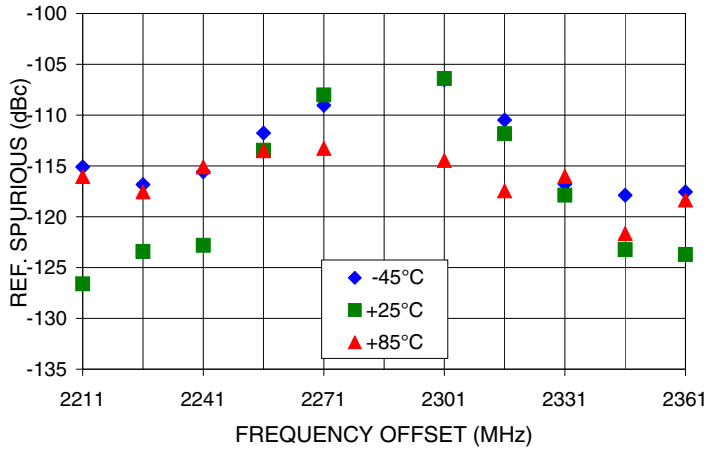


COMPARISON SPURIOUS
Vs FREQ. OFFSET @ Fcar = 2316MHz

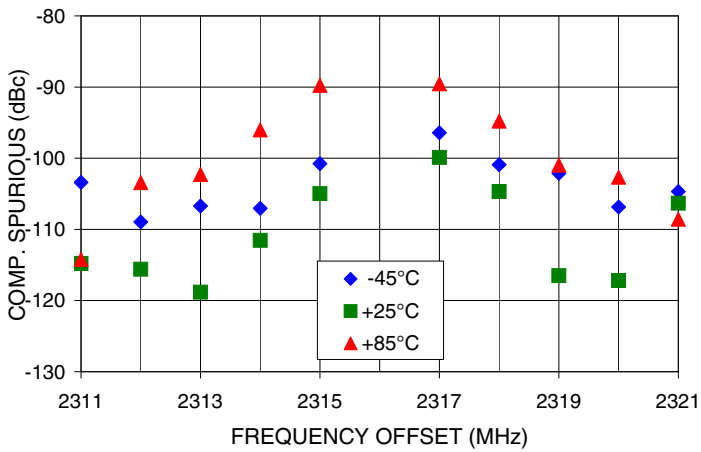


REFERENCE SPURIOUS
Vs FREQ. OFFSET @ Fcar = 2316MHz

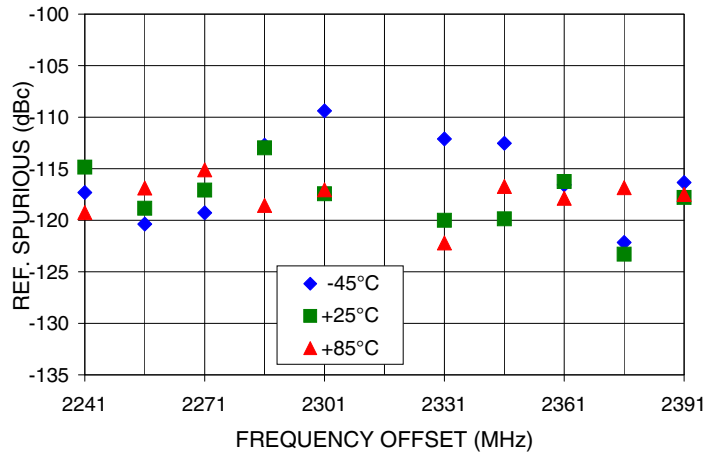


COMPARISON SPURIOUS
Vs FREQ. OFFSET @ Fcar = 2346MHz

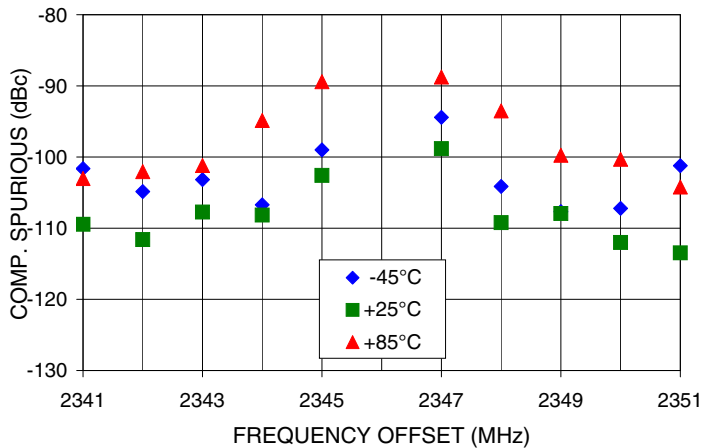

REFERENCE SPURIOUS
Vs FREQ. OFFSET @ Fcar = 2346MHz

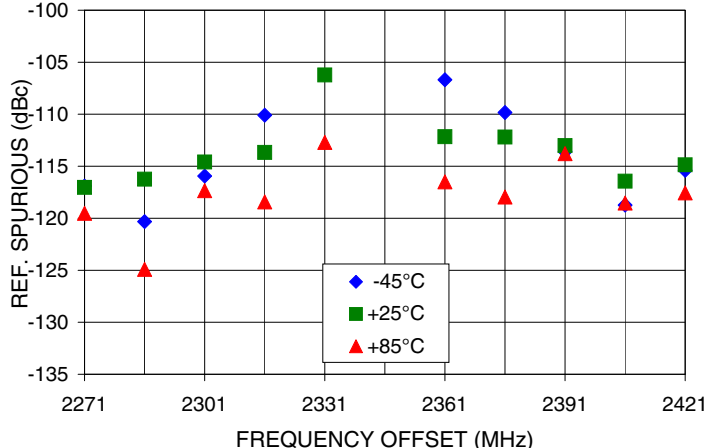

Pin Configuration

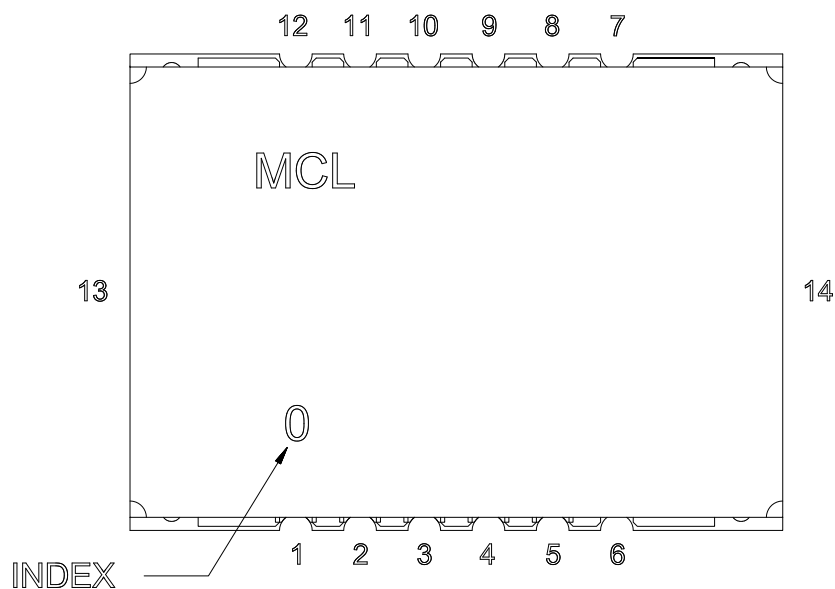


Pin Connection


Pin Number	Function
1	VCC PLL
2	GND
3	REF IN
4	GND
5	VCC VCO
6	GND
7	RF OUT
8	GND
9	LOCK DET
10	CLOCK
11	DATA
12	LE
13	GND
14	GND

Recommended Application Circuit

Note: REF IN and RF OUT ports are internally AC coupled.

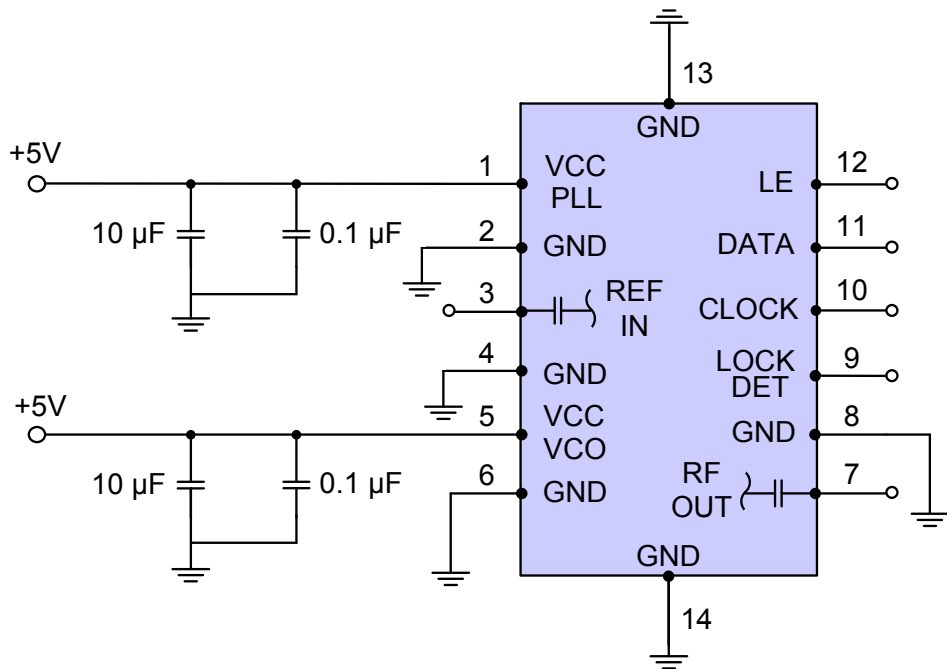

Device Marking

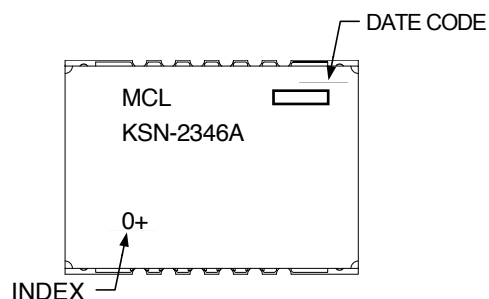**Additional Detailed Technical Information**

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Case Style: DK801

Tape & Reel: TR-F28

Suggested Layout for PCB Design: PL-249

Evaluation Board: TB-567+

Environment Ratings: ENV03T2



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.