

# Frequency Synthesizer

KSN-2534A-119+

50Ω 2354 to 2556 MHz

## The Big Deal

- Fractional N synthesizer
- Low phase noise and spurious
- Robust design and construction
- Small size 0.80" x 0.58" x 0.15"



CASE STYLE: DK1042

## Product Overview

The KSN-2534A-119+ is a Frequency Synthesizer, designed to operate from 2354 to 2556 MHz for WiMAX application. The KSN-2534A-119+ is packaged in a metal case (size of 0.80" x 0.58" x 0.15") to shield against unwanted signals and noise.

## Key Features

| Feature   | Advantages   |
|---|--|
| Low phase noise and spurious: <ul style="list-style-type: none"><li>• Phase Noise: -100 dBc/Hz typ. @ 10 kHz offset</li><li>• Step Size Spurious: -98 dBc typ.</li><li>• Comparison Spurious: -95 dBc typ.</li><li>• Reference Spurious: -95 dBc typ.</li></ul> | Low phase noise and spurious improve system EVM (Error Vector Magnitude).  |
| Robust design and construction  | To enhance the robustness of KSN-2534A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer. |
| Small size, 0.80" x 0.58" x 0.15"   | The small size enables the KSN-2534A-119+ to be used in compact designs.   |



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

50Ω 2354 to 2556 MHz

## Features

- Fractional N synthesizer
- Integrated VCO + PLL
- Low phase noise and spurious
- Robust design and construction
- Low operating voltage (VCC VCO=+5V, VCC PLL=+3V)
- Small size 0.80" x 0.58" x 0.15"

## Applications

- WiMAX

## General Description

The KSN-2534A-119+ is a Frequency Synthesizer, designed to operate from 2354 to 2556 MHz for WiMAX application. The KSN-2534A-119+ is packaged in a metal case (size of 0.80" x 0.58" x 0.15") to shield against unwanted signals and noise. To enhance the robustness of KSN-2534A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.



CASE STYLE: DK1042

PRICE: \$29.95 ea. QTY (1-9)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

*The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.*

## Simplified Schematic



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs &amp; shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. OR  
M126018  
EDR-8853/2F1  
KSN-2534A-119+  
Category-A1  
RAV  
100322  
Page 2 of 11

**Electrical Specifications** (over operating temperature -40°C to +85°C)

| Parameters                          |                            | Test Conditions       | Min.                               | Typ.  | Max.  | Units            |
|-------------------------------------|----------------------------|-----------------------|------------------------------------|-------|-------|------------------|
| Frequency Range                     |                            | -                     | 2354                               | -     | 2556  | MHz              |
| Step Size                           |                            | -                     | -                                  | 250   | -     | kHz              |
| Comparison Frequency                |                            | -                     | -                                  | 10    | -     | MHz              |
| Settling Time                       |                            | Within $\pm 1$ kHz    | -                                  | 25    | -     | mSec             |
| Output Power                        |                            | -                     | -1                                 | +2    | +5    | dBm              |
| SSB Phase Noise                     | @ 100 Hz offset            | -                     | -                                  | -85   | -     | dBc/Hz           |
|                                     | @ 1 kHz offset             | -                     | -                                  | -85   | -79   |                  |
|                                     | @ 10 kHz offset            | -                     | -                                  | -100  | -97   |                  |
|                                     | @ 100 kHz offset           | -                     | -                                  | -125  | -120  |                  |
|                                     | @ 1 MHz offset             | -                     | -                                  | -145  | -140  |                  |
| Step Size Spurious Suppression      |                            | Step Size 250 kHz     | -                                  | -98   | -80   | dBc              |
| 0.5 Step Size Spurious Suppression  |                            | 0.5 Step Size 125 kHz | -                                  | -85   | -77   |                  |
| Reference Spurious Suppression      |                            | Ref. Freq. 10 MHz     | -                                  | -95   | -80   |                  |
| Comparison Spurious Suppression     |                            | Comp. Freq. 10 MHz    | -                                  | -95   | -80   |                  |
| Non - Harmonic Spurious Suppression |                            | -                     | -                                  | -90   | -     |                  |
| Harmonic Suppression                |                            | -                     | -                                  | -35   | -20   | V                |
| VCO Supply Voltage                  |                            | +5.00                 | +4.75                              | +5.00 | +5.25 |                  |
| PLL Supply Voltage                  |                            | +3.00                 | +2.85                              | +3.00 | +3.15 | mA               |
| VCO Supply Current                  |                            | -                     | -                                  | 45    | 50    |                  |
| PLL Supply Current                  |                            | -                     | -                                  | 14    | 22    |                  |
| Reference Input<br>(External)       | Frequency                  | 10 (square wave)      | -                                  | 10    | -     | MHz              |
|                                     | Amplitude                  | 1                     | -                                  | 1     | -     | V <sub>P-P</sub> |
|                                     | Input impedance            | -                     | -                                  | 100   | -     | K $\Omega$       |
|                                     | Phase Noise @ 1 kHz offset | -                     | -                                  | -140  | -     | dBc/Hz           |
| RF Output port Impedance            |                            | -                     | -                                  | 50    | -     | $\Omega$         |
| Input Logic Level                   | Input high voltage         | -                     | 2.55                               | -     | -     | V                |
|                                     | Input low voltage          | -                     | -                                  | -     | 0.55  | V                |
| Digital Lock Detect                 | Locked                     | -                     | 2.45                               | -     | 3.15  | V                |
|                                     | Unlocked                   | -                     | -                                  | -     | 0.40  | V                |
| Frequency Synthesizer PLL           |                            | -                     | ADF4153                            |       |       |                  |
| PLL Programming                     |                            | -                     | 3-wire serial 3V CMOS              |       |       |                  |
| Register Map @ 2556 MHz             | R0_Register                | -                     | (MSB) 1111111100000001100000 (LSB) |       |       |                  |
|                                     | R1_Register                | -                     | (MSB) 101000100000010100001 (LSB)  |       |       |                  |
|                                     | R2_Register                | -                     | (MSB) 111100010 (LSB)              |       |       |                  |
|                                     | R3_Register                | -                     | (MSB) 1111000111 (LSB)             |       |       |                  |

**Absolute Maximum Ratings**

| Parameters                               | Ratings                    |
|--|----------------------------|
| VCO Supply Voltage                       | +5.8V                      |
| PLL Supply Voltage                       | +4.0V                      |
| VCO Supply Voltage to PLL Supply Voltage | -0.3V to +5.8V             |
| Reference Frequency Voltage              | -0.3Vmin, VCC PLL +0.3Vmax |
| Data, Clock, LE Levels                   | -0.3Vmin, VCC PLL +0.3Vmax |
| Operating Temperature                    | -40°C to +85°C             |
| Storage Temperature                      | -55°C to +100°C            |

Permanent damage may occur if any of these limits are exceeded



Patent Pending

The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

## Typical Performance Data

| FREQUENCY<br>(MHz) | POWER OUTPUT<br>(dBm) |       |       | VCO CURRENT<br>(mA) |       |       | PLL CURENT<br>(mA) |       |       |
|--------------------|-----------------------|-------|-------|---------------------|-------|-------|--------------------|-------|-------|
|                    | -45°C                 | +25°C | +85°C | -45°C               | +25°C | +85°C | -45°C              | +25°C | +85°C |
| 2354.00            | 2.00                  | 1.82  | 1.29  | 42.12               | 44.30 | 45.66 | 12.87              | 14.06 | 16.40 |
| 2367.50            | 2.04                  | 1.85  | 1.32  | 42.20               | 44.37 | 45.71 | 12.87              | 14.06 | 16.43 |
| 2390.00            | 2.01                  | 1.83  | 1.34  | 42.26               | 44.43 | 45.77 | 12.02              | 13.18 | 15.53 |
| 2412.50            | 2.03                  | 1.88  | 1.43  | 42.31               | 44.50 | 45.84 | 12.81              | 14.00 | 16.39 |
| 2435.00            | 2.05                  | 1.93  | 1.53  | 42.38               | 44.58 | 45.93 | 12.89              | 14.08 | 16.49 |
| 2457.50            | 2.02                  | 1.92  | 1.53  | 42.45               | 44.65 | 45.98 | 12.87              | 14.06 | 16.48 |
| 2480.00            | 1.95                  | 1.87  | 1.50  | 42.49               | 44.69 | 46.04 | 12.03              | 13.18 | 15.57 |
| 2502.50            | 1.98                  | 1.90  | 1.52  | 42.57               | 44.76 | 46.10 | 12.81              | 14.00 | 16.43 |
| 2525.00            | 2.03                  | 1.95  | 1.57  | 42.63               | 44.83 | 46.16 | 12.89              | 14.08 | 16.52 |
| 2547.50            | 2.03                  | 1.94  | 1.58  | 42.69               | 44.88 | 46.21 | 12.87              | 14.06 | 16.51 |
| 2556.00            | 2.03                  | 1.94  | 1.57  | 42.70               | 44.90 | 46.23 | 12.86              | 14.05 | 16.50 |

| FREQUENCY<br>(MHz) | HARMONICS (dBc) |        |        |        |        |        |
|--------------------|-----------------|--------|--------|--------|--------|--------|
|                    | F2              |        |        | F3     |        |        |
|                    | -45°C           | +25°C  | +85°C  | -45°C  | +25°C  | +85°C  |
| 2354.00            | -31.63          | -36.33 | -32.00 | -35.31 | -34.80 | -39.46 |
| 2367.50            | -30.78          | -34.29 | -31.56 | -35.80 | -35.69 | -40.28 |
| 2390.00            | -31.58          | -33.75 | -30.48 | -35.99 | -36.97 | -41.86 |
| 2412.50            | -32.16          | -36.21 | -32.29 | -36.09 | -36.90 | -41.06 |
| 2435.00            | -31.22          | -34.79 | -31.25 | -34.95 | -36.65 | -41.29 |
| 2457.50            | -29.55          | -34.22 | -32.53 | -35.08 | -37.00 | -41.66 |
| 2480.00            | -30.51          | -34.42 | -32.53 | -36.30 | -37.49 | -42.38 |
| 2502.50            | -29.89          | -33.68 | -31.77 | -35.40 | -37.92 | -43.91 |
| 2525.00            | -30.31          | -34.82 | -33.74 | -35.84 | -38.10 | -43.85 |
| 2547.50            | -28.43          | -33.45 | -33.00 | -35.85 | -38.35 | -45.78 |
| 2556.00            | -28.60          | -33.53 | -33.60 | -36.75 | -38.29 | -46.00 |



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCStore/terms.jsp](http://www.minicircuits.com/MCStore/terms.jsp).

| FREQUENCY<br>(MHz) | PHASE NOISE (dBc/Hz) @ OFFSETS |        |         |         |         |
|--------------------|--------------------------------|--------|---------|---------|---------|
|                    | +25°C                          |        |         |         |         |
|                    | 100Hz                          | 1kHz   | 10kHz   | 100kHz  | 1MHz    |
| 2354.00            | -82.64                         | -89.00 | -101.84 | -125.00 | -145.36 |
| 2367.50            | -81.67                         | -87.20 | -102.14 | -125.55 | -145.70 |
| 2390.00            | -81.71                         | -88.00 | -101.99 | -125.38 | -145.52 |
| 2412.50            | -81.88                         | -87.28 | -101.73 | -125.36 | -145.67 |
| 2435.00            | -83.03                         | -86.38 | -101.73 | -125.63 | -145.56 |
| 2457.50            | -82.26                         | -87.43 | -101.51 | -125.75 | -146.21 |
| 2480.00            | -83.65                         | -87.13 | -101.33 | -125.58 | -146.21 |
| 2502.50            | -82.96                         | -88.18 | -101.99 | -126.01 | -146.65 |
| 2525.00            | -82.18                         | -87.08 | -101.97 | -125.90 | -146.70 |
| 2547.50            | -83.20                         | -86.67 | -101.72 | -125.79 | -145.90 |
| 2556.00            | -82.60                         | -85.73 | -101.84 | -125.77 | -146.40 |

| FREQUENCY<br>(MHz) | PHASE NOISE (dBc/Hz) @ OFFSETS |        |         |         |         |
|--------------------|--------------------------------|--------|---------|---------|---------|
|                    | -45°C                          |        |         |         |         |
|                    | 100Hz                          | 1kHz   | 10kHz   | 100kHz  | 1MHz    |
| 2354.00            | -78.47                         | -88.94 | -102.71 | -126.41 | -146.72 |
| 2367.50            | -78.46                         | -90.17 | -103.12 | -126.79 | -147.12 |
| 2390.00            | -80.80                         | -89.43 | -102.75 | -126.63 | -147.01 |
| 2412.50            | -79.14                         | -88.47 | -102.40 | -126.29 | -146.35 |
| 2435.00            | -79.98                         | -88.01 | -102.21 | -126.10 | -146.92 |
| 2457.50            | -79.25                         | -87.50 | -102.39 | -126.60 | -146.57 |
| 2480.00            | -80.62                         | -87.13 | -101.94 | -126.40 | -147.05 |
| 2502.50            | -81.93                         | -87.00 | -102.25 | -126.91 | -147.53 |
| 2525.00            | -83.04                         | -88.51 | -102.24 | -126.89 | -147.24 |
| 2547.50            | -82.37                         | -87.33 | -102.45 | -126.85 | -147.32 |
| 2556.00            | -80.00                         | -87.11 | -102.01 | -126.57 | -147.52 |

| FREQUENCY<br>(MHz) | PHASE NOISE (dBc/Hz) @ OFFSETS |        |         |         |         |
|--------------------|--------------------------------|--------|---------|---------|---------|
|                    | +85°C                          |        |         |         |         |
|                    | 100Hz                          | 1kHz   | 10kHz   | 100kHz  | 1MHz    |
| 2354.00            | -76.75                         | -86.97 | -100.59 | -123.11 | -143.37 |
| 2367.50            | -74.30                         | -87.15 | -100.84 | -123.52 | -143.69 |
| 2390.00            | -80.98                         | -87.09 | -100.62 | -123.66 | -143.93 |
| 2412.50            | -77.51                         | -86.65 | -100.44 | -123.92 | -144.08 |
| 2435.00            | -78.45                         | -85.92 | -100.71 | -123.99 | -144.15 |
| 2457.50            | -76.48                         | -85.78 | -100.65 | -124.20 | -144.53 |
| 2480.00            | -77.82                         | -87.14 | -100.58 | -124.13 | -144.53 |
| 2502.50            | -77.49                         | -86.73 | -100.62 | -124.67 | -144.99 |
| 2525.00            | -77.72                         | -86.20 | -100.65 | -124.45 | -144.88 |
| 2547.50            | -81.03                         | -84.30 | -100.37 | -124.44 | -144.91 |
| 2556.00            | -76.85                         | -84.53 | -100.60 | -124.24 | -144.68 |



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

| REFERENCE & COMPARISON<br>SPURIOUS<br>ORDER | REFERENCE & COMPARISON<br>SPURIOUS @Fcarrier<br>2354MHz+(n*Fcomp or Fref)<br>(dBc) note 1 |         |         | REFERENCE & COMPARISON<br>SPURIOUS @Fcarrier<br>2455MHz+(n*Fcomp or Fref)<br>(dBc) note 1 |         |         | REFERENCE & COMPARISON<br>SPURIOUS @Fcarrier<br>2556MHz+(n*Fcomp or Fref)<br>(dBc) note 1 |         |         |
|---|---|---------|---------|---|---------|---------|---|---------|---------|
|   | -45°C   | +25°C   | +85°C   | -45°C   | +25°C   | +85°C   | -45°C   | +25°C   | +85°C   |
| -5  | -105.42   | -104.52 | -105.98 | -104.74   | -102.17 | -102.84 | -103.61   | -103.05 | -105.59 |
| -4  | -104.99   | -106.19 | -102.73 | -104.24   | -102.14 | -101.14 | -102.09   | -102.40 | -103.72 |
| -3  | -104.03   | -107.28 | -101.25 | -102.06   | -100.79 | -98.90  | -99.78  | -102.74 | -103.39 |
| -2  | -105.02   | -109.58 | -100.80 | -100.99   | -99.18  | -96.56  | -97.39  | -100.00 | -100.19 |
| -1  | -90.83  | -91.89  | -87.80  | -102.37   | -100.44 | -94.57  | -94.61  | -93.68  | -92.23  |
| 0 note 2                                    | -   | -       | -       | -   | -       | -       | -   | -       | -       |
| +1  | -90.25  | -89.42  | -87.54  | -98.14  | -100.79 | -101.69 | -104.25   | -110.80 | -101.51 |
| +2  | -103.47   | -105.92 | -102.35 | -102.44   | -101.22 | -100.04 | -100.57   | -100.73 | -102.66 |
| +3  | -102.90   | -106.71 | -102.49 | -103.56   | -101.75 | -102.11 | -102.30   | -102.96 | -104.10 |
| +4  | -105.32   | -107.99 | -104.06 | -104.76   | -103.39 | -104.62 | -104.11   | -104.69 | -104.78 |
| +5  | -107.30   | -109.51 | -106.33 | -106.53   | -104.25 | -107.88 | -105.29   | -106.36 | -106.45 |

Note 1: Reference frequency = Comparison frequency = 10 MHz

Note 2: All spurs are referenced to carrier signal (n=0).

| STEP SIZE<br>SPURIOUS<br>ORDER | 0.5 STEP SIZE & STEP SIZE<br>SPURIOUS @Fcarrier<br>2354MHz+(n*Fstep size)<br>(dBc) note 3 |         |         | 0.5 STEP SIZE & STEP SIZE<br>SPURIOUS @Fcarrier<br>2455MHz+(n*Fstep size)<br>(dBc) note 3 |         |         | 0.5 STEP SIZE & STEP SIZE<br>SPURIOUS @Fcarrier<br>2556MHz+(n*Fstep size)<br>(dBc) note 3 |         |         |
|--------------------------------|---|---------|---------|---|---------|---------|---|---------|---------|
|                                | -45°C   | +25°C   | +85°C   | -45°C   | +25°C   | +85°C   | -45°C   | +25°C   | +85°C   |
| -5.0                           | -116.09   | -116.62 | -118.22 | -125.86   | -117.32 | -109.41 | -117.44   | -114.19 | -114.54 |
| -4.5                           | -106.45   | -120.32 | -113.58 | -111.94   | -116.81 | -118.46 | -111.99   | -115.97 | -112.70 |
| -4.0                           | -122.66   | -118.07 | -118.39 | -113.04   | -110.91 | -116.51 | -123.34   | -115.48 | -121.63 |
| -3.5                           | -103.47   | -110.32 | -108.83 | -113.51   | -115.21 | -114.69 | -116.72   | -114.84 | -114.34 |
| -3.0                           | -116.76   | -115.81 | -116.46 | -113.41   | -113.60 | -116.43 | -118.42   | -115.24 | -115.63 |
| -2.5                           | -110.51   | -112.48 | -105.42 | -109.62   | -112.15 | -106.09 | -113.40   | -110.02 | -117.48 |
| -2.0                           | -107.92   | -109.60 | -111.09 | -116.01   | -107.93 | -108.78 | -110.48   | -107.47 | -107.05 |
| -1.5                           | -101.90   | -108.31 | -107.99 | -113.12   | -105.40 | -102.56 | -103.85   | -106.51 | -110.32 |
| -1.0                           | -95.94  | -96.07  | -105.22 | -105.16   | -98.86  | -98.43  | -104.70   | -98.22  | -103.67 |
| -0.5                           | -95.27  | -87.42  | -91.24  | -82.37  | -84.87  | -89.07  | -89.00  | -86.62  | -91.13  |
| 0 note 4                       | -   | -       | -       | -   | -       | -       | -   | -       | -       |
| +0.5                           | -93.09  | -84.76  | -93.54  | -84.20  | -85.86  | -88.90  | -91.75  | -83.35  | -90.20  |
| +1.0                           | -97.52  | -98.75  | -101.19 | -106.36   | -101.55 | -100.33 | -104.06   | -99.49  | -102.48 |
| +1.5                           | -104.20   | -107.31 | -105.58 | -113.85   | -105.97 | -102.97 | -104.51   | -100.16 | -109.58 |
| +2.0                           | -108.12   | -109.42 | -113.57 | -115.72   | -113.12 | -110.80 | -111.88   | -108.96 | -107.44 |
| +2.5                           | -111.01   | -111.98 | -105.34 | -109.62   | -110.36 | -106.39 | -112.05   | -111.92 | -118.02 |
| +3.0                           | -113.59   | -114.82 | -114.71 | -113.41   | -114.11 | -114.62 | -120.24   | -111.27 | -116.79 |
| +3.5                           | -104.16   | -109.10 | -106.85 | -113.60   | -113.96 | -113.33 | -118.52   | -115.93 | -113.58 |
| +4.0                           | -120.98   | -115.83 | -115.62 | -113.75   | -114.35 | -116.04 | -122.83   | -114.35 | -120.65 |
| +4.5                           | -106.83   | -116.28 | -112.78 | -111.43   | -116.64 | -113.21 | -110.84   | -117.72 | -112.02 |
| +5.0                           | -111.22   | -110.13 | -112.86 | -121.39   | -120.39 | -110.35 | -117.64   | -111.32 | -112.63 |

Note 3: Step size 250 kHz

Note 4: All spurs are referenced to carrier signal (n=0).



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661






The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCStore/terms.jsp](http://www.minicircuits.com/MCStore/terms.jsp).

## Typical Performance Curves

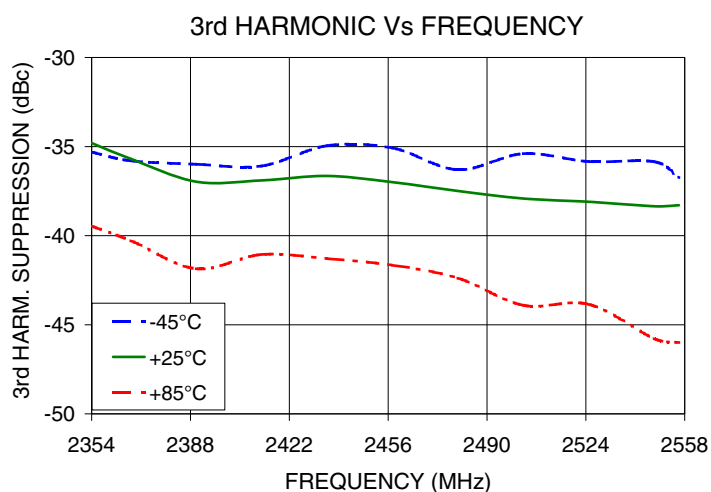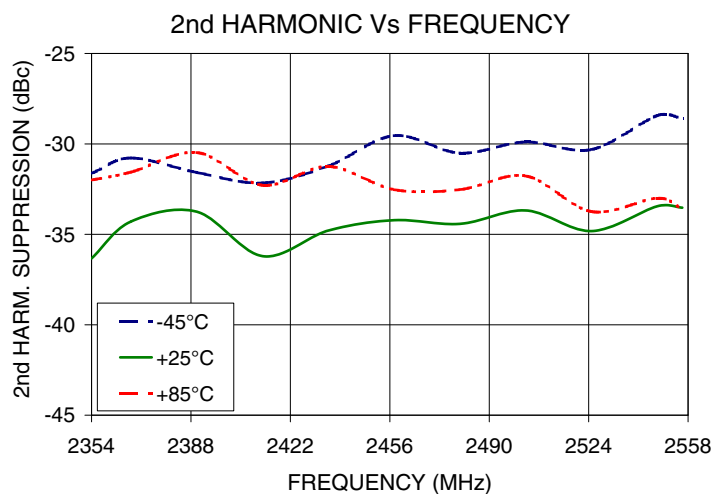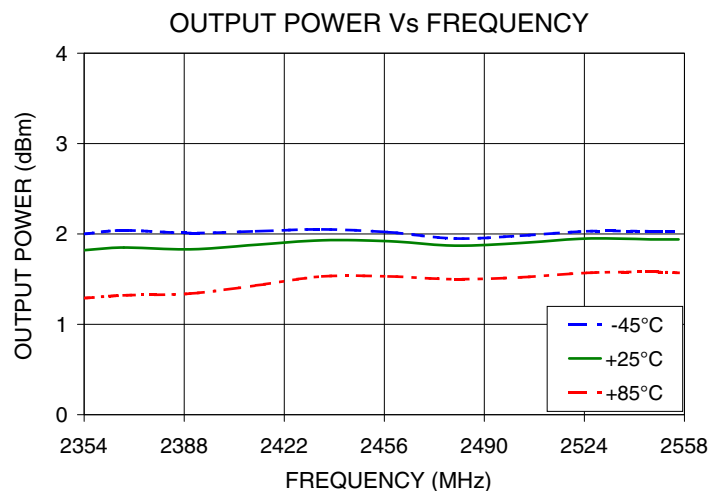

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).


PHASE NOISE @ 100 Hz offset

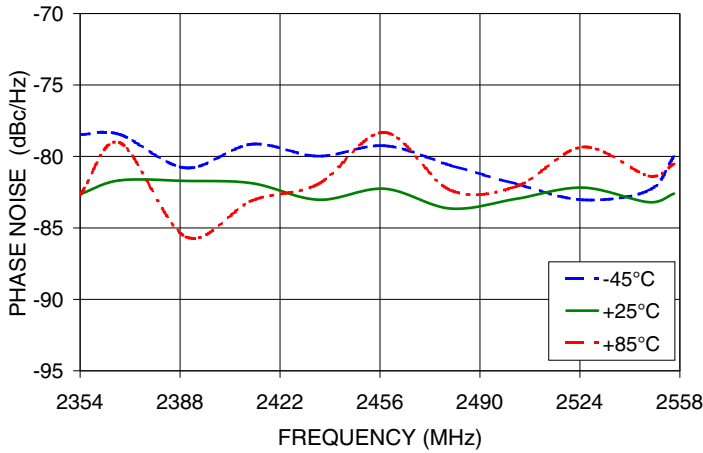


PHASE NOISE @ 1kHz offset

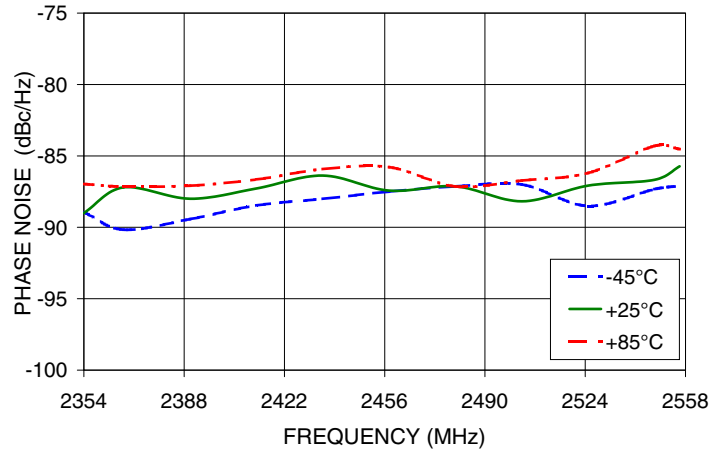


PHASE NOISE @ 10kHz offset

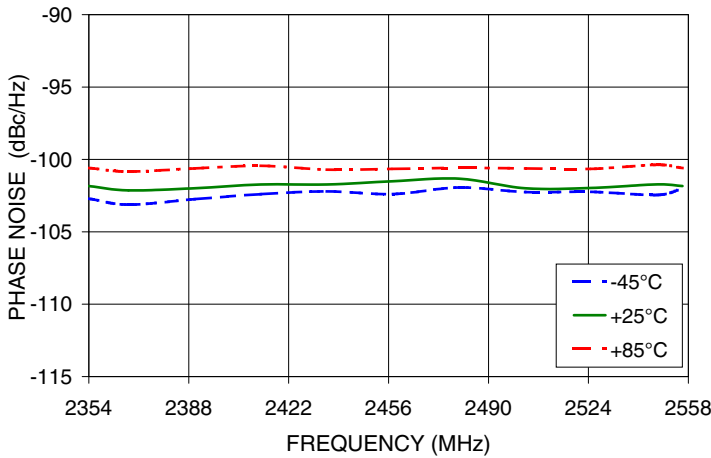

PHASE NOISE @ 100kHz offset

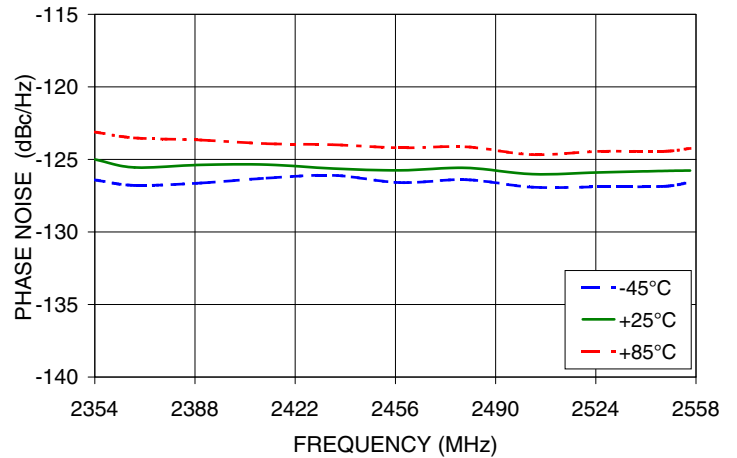

PHASE NOISE @ 1MHz offset

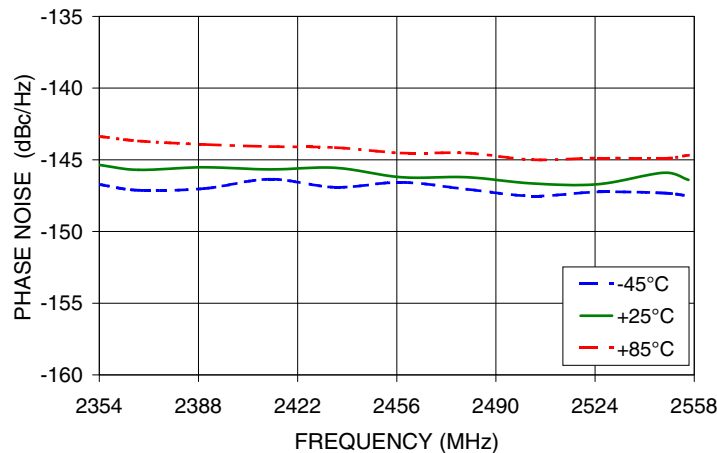

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCStore/terms.jsp](http://www.minicircuits.com/MCStore/terms.jsp).




REFERENCE & COMPARISON SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 2354MHz

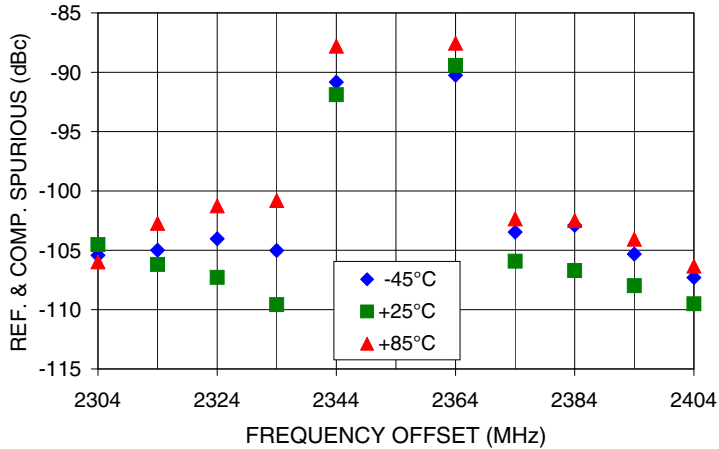


0.5 STEP SIZE & STEP SIZE SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 2354MHz

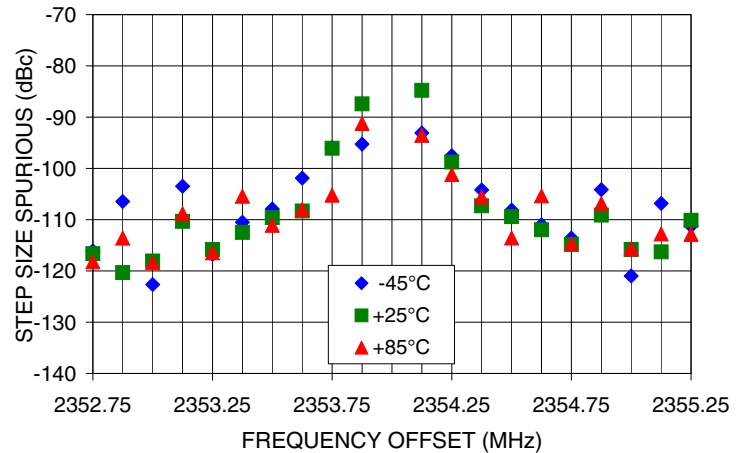


REFERENCE & COMPARISON SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 2455MHz

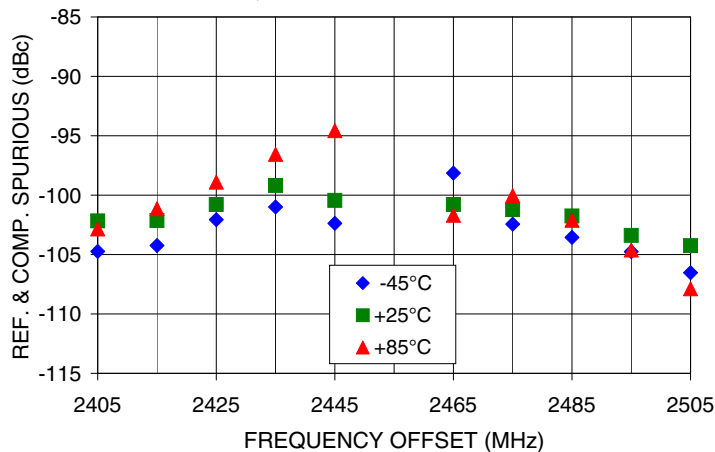


0.5 STEP SIZE & STEP SIZE SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 2455MHz

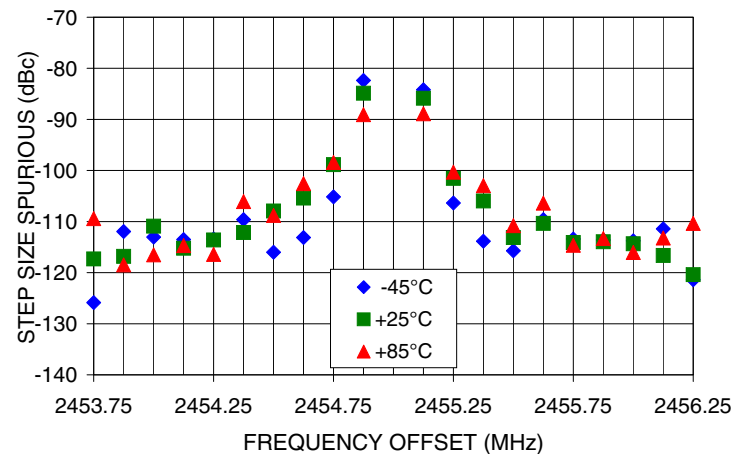

REFERENCE & COMPARISON SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 2556MHz

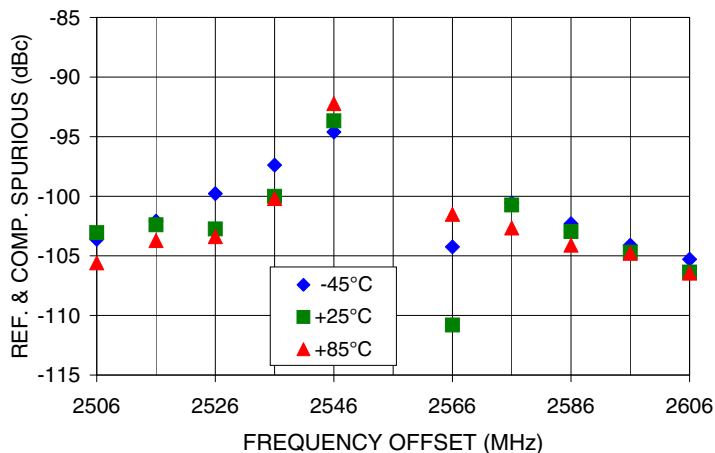

0.5 STEP SIZE & STEP SIZE SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 2556MHz

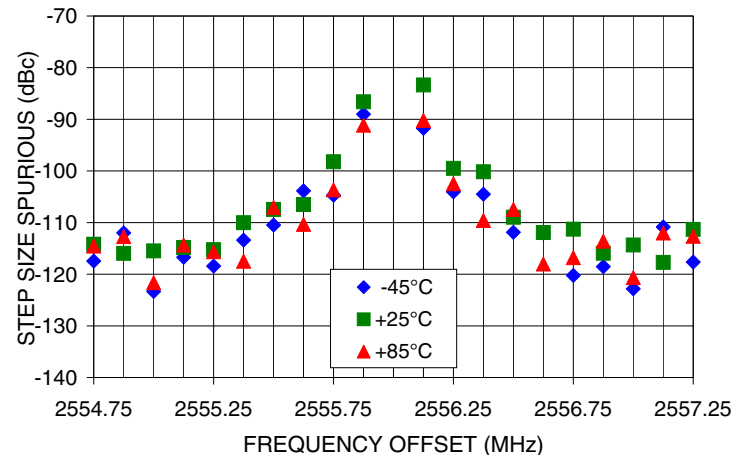

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

Pin Configuration

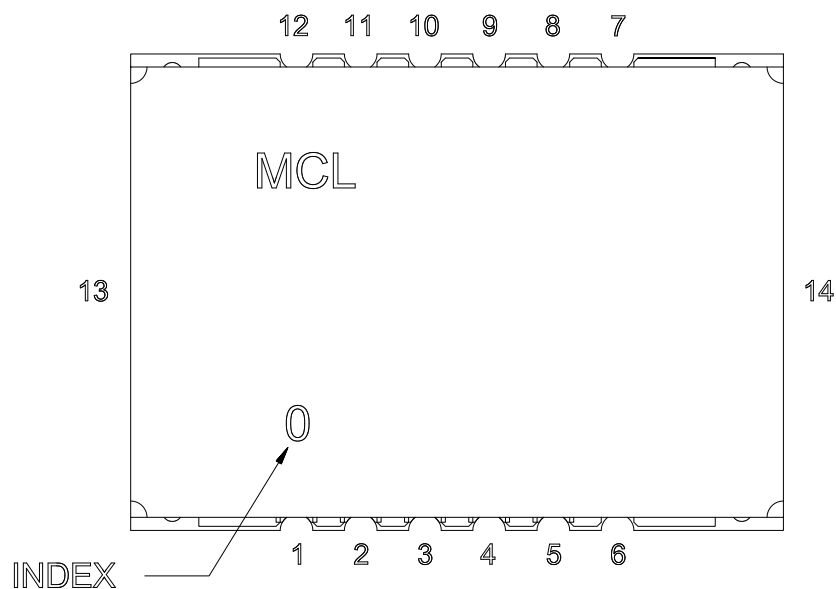


Pin Connection


| Pin Number | Function |
|------------|----------|
| 1          | VCC PLL  |
| 2          | GND      |
| 3          | REF IN   |
| 4          | GND      |
| 5          | VCC VCO  |
| 6          | GND      |
| 7          | RF OUT   |
| 8          | GND      |
| 9          | LOCK DET |
| 10         | CLOCK    |
| 11         | DATA     |
| 12         | LE       |
| 13         | GND      |
| 14         | GND      |

Recommended Application Circuit

Note: REF IN and RF OUT ports are internally AC coupled.

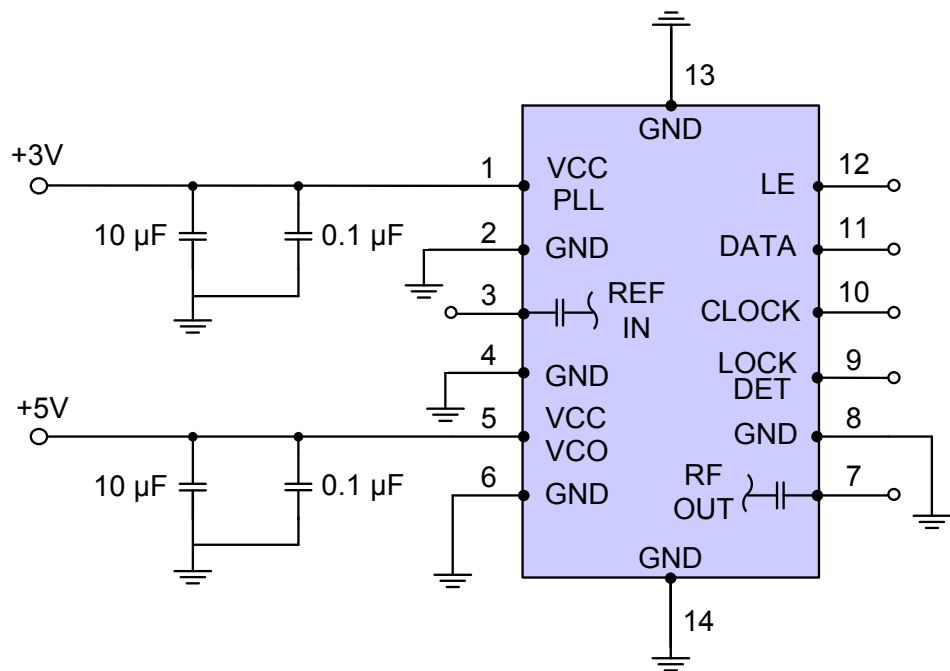

## Device Marking

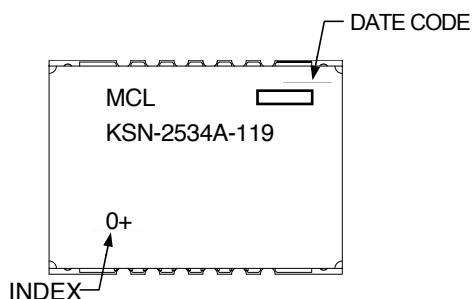

### Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

**Case Style:** DK1042

**Tape & Reel:** TR-F28

**Suggested Layout for PCB Design:** PL-249

**Evaluation Board:** TB-567-2+

**Environment Ratings:** ENV03T2



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



Patent Pending

The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).